

Manual motor starter MS132

Manual motor starters are electro-mechanical protection devices for the main circuit. They are used mainly to switch motors manually ON/OFF and protect them fuse less against short-circuit, overload and phase failures.

Fuse less protection with a manual motor starter saves costs, space and ensures a quick reaction under short-circuit condition, by switching off the motor within milliseconds. Fuse less starter combinations are setup together with contactors.

Description

- Overload protection – trip class 10
- Phase loss sensitivity
- Disconnect function
- Temperature compensation from -25 ... +60 °C
- Adjustable current setting for overload protection
- Suitable for three- and single-phase application
- Trip-free mechanism
- Status indication
- Clear switch position indication ON/OFF/TRIP
- Lockable handle

Approvals

	cULus UL 508
	CB scheme
	CCC
	GOST-R
	GOST-F
	ABS
	Lloyd's Register
	GL
	DNV
	RINA

Marks

CE CE



2CDC241020F0009

Order data

MS132 screw terminal




Setting range	Type	Trip class	Order code	Pack- ing unit	Weight per PCE
A				PCE	kg
0.10...0.16	MS132-0.16	10A	1SAM350000R1001	1	0.215
0.16...0.25	MS132-0.25	10	1SAM350000R1002	1	0.215
0.25...0.40	MS132-0.4	10	1SAM350000R1003	1	0.215
0.40...0.63	MS132-0.63	10	1SAM350000R1004	1	0.215
0.63...1.00	MS132-1.0	10	1SAM350000R1005	1	0.215
1.00...1.60	MS132-1.6	10	1SAM350000R1006	1	0.265
1.60...2.50	MS132-2.5	10	1SAM350000R1007	1	0.265
2.50...4.00	MS132-4.0	10	1SAM350000R1008	1	0.265
4.00...6.30	MS132-6.3	10	1SAM350000R1009	1	0.265
6.30...10.0	MS132-10	10	1SAM350000R1010	1	0.265
8.00...12.0	MS132-12	10	1SAM350000R1012	1	0.310
10.0...16.0	MS132-16	10	1SAM350000R1011	1	0.310
16.0...20.0	MS132-20	10	1SAM350000R1013	1	0.310
20.0...25.0	MS132-25	10	1SAM350000R1014	1	0.310
25.0...32.0	MS132-32	10	1SAM350000R1015	1	0.310

Note: MS132 with pre-assembled auxiliary contact HKF1-11, please order as follow 1SAM350005Rxxxx

Power and productivity
for a better world™



Functional description

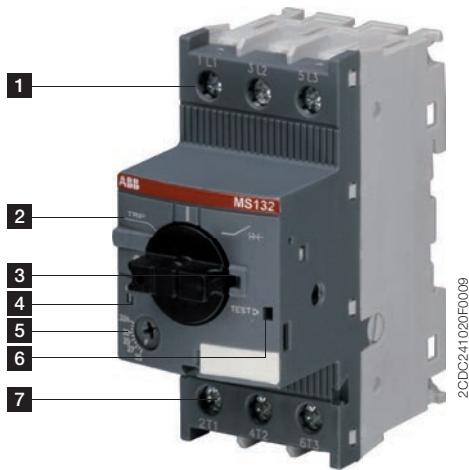


- 1** Terminals 1L1, 3L2, 5L3
- 2** Switch position TRIP
- 3** Lockable handle
- 4** Status indication for short-circuit
- 5** Current setting range
Adjustable current setting for overload protection
- 6** Test function
- 7** Terminals 2T1, 4T2, 6T3

Application


The manual motor starters protect the load and the installation against short-circuit and overload. They are three pole protection devices with thermal tripping elements for overload protection and electromagnetic tripping elements for short-circuit protection. Furthermore, they provide a disconnect function for safely isolation of the installation and the supply and can be used for the manual switching of loads.

The manual motor starters have a setting scale in amperes, which allows the direct adjusting of the device without any additional calculation. In compliance with international and national standards, the setting current is the rated current of the motor and not the tripping current (no tripping at $1.05 \times I$, tripping at $1.2 \times I$; I = setting current).

Operation mode

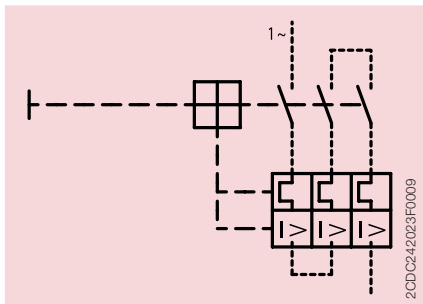


Single-phase operation

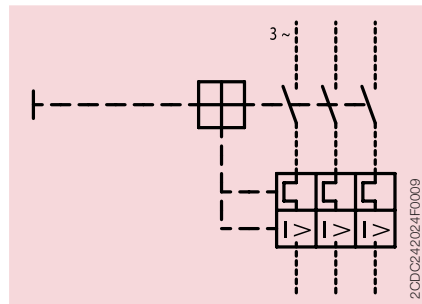

Three-phase operation


Wiring diagram

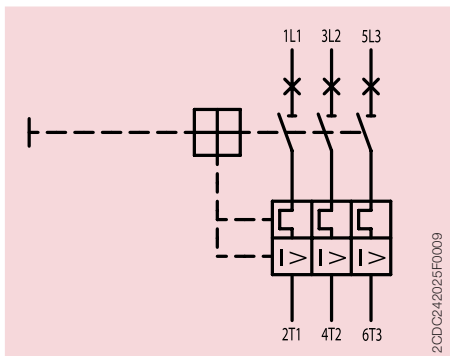

Resistance and power loss per pole

Type	Setting range		Resistance per pole Ω	Power loss per pole	
	lower value A	upper value A		at lower value W	at upper value W
MS132-0.16	0.10	0.16	66.00	0.7	1.7
MS132-0.25	0.16	0.25	25.50	0.7	1.7
MS132-0.4	0.25	0.40	10.38	0.7	1.7
MS132-0.63	0.40	0.63	4.36	0.7	1.7
MS132-1.0	0.63	1.00	1.605	0.7	1.7
MS132-1.6	1.00	1.60	0.648	0.7	1.7
MS132-2.5	1.60	2.50	0.272	0.7	1.7
MS132-4.0	2.50	4.00	0.106	0.7	1.7
MS132-6.3	4.00	6.30	0.046	0.7	1.7
MS132-10	6.30	10.0	0.024	0.9	2.4
MS132-12	8.00	12.0	0.016	1.0	2.3
MS132-16	10.0	16.0	0.011	1.1	2.8
MS132-20	16.0	20.0	0.0057	1.5	2.3
MS132-25	20.0	25.0	0.0045	1.8	2.8
MS132-32	25.0	32.0	0.0030	1.9	3.1


Technical diagram

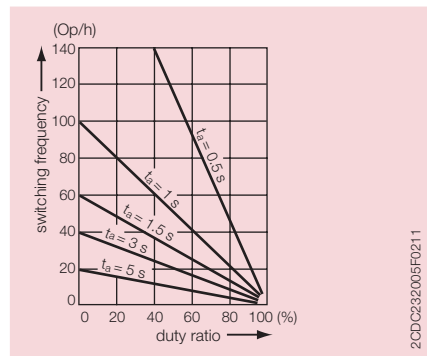


Intermittent periodic duty, t_a : Motor starting time

Dimensions


in mm / inches

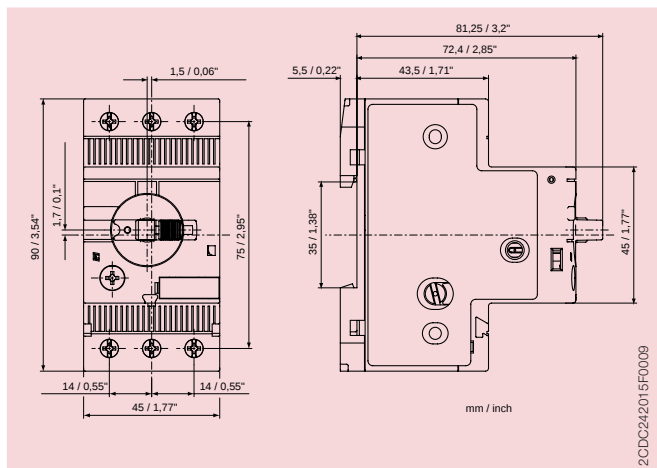


MS132 ≤ 10 A

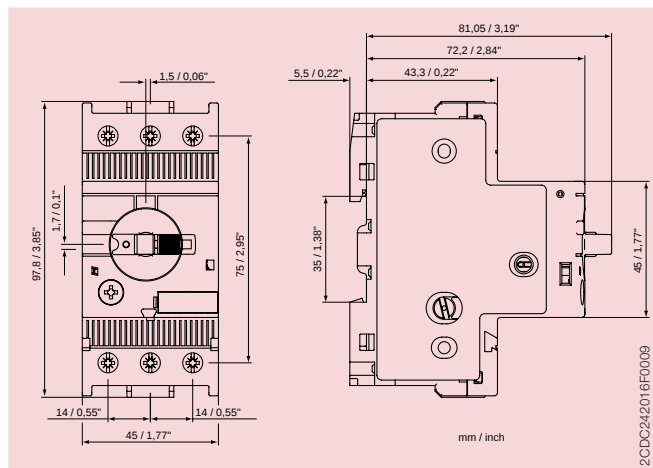

MS132 > 10 A

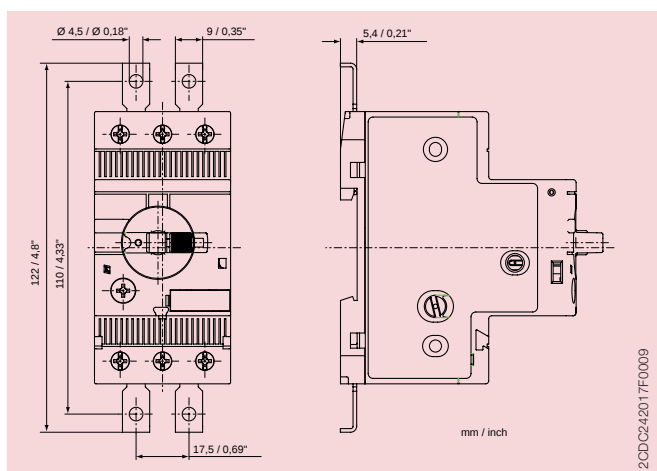

MS132 ≤ 10 A with screw fixing kit FS116 (accessory)

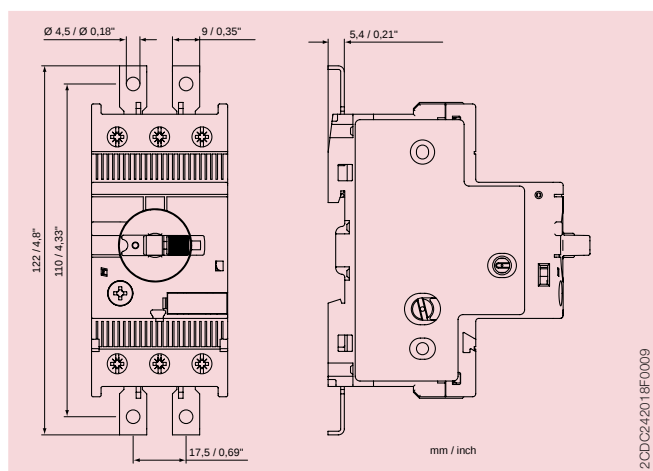

MS132 > 10 A + with screw fixing kit FS116 (accessory)

Technical data IEC/EN

Data at $T_A = 40^\circ\text{C}$ and at rated values, if nothing else indicated

Main circuit

	1L1-3L2-5L3 2T1-4T2-6T3
Rated operational voltage U_e	690 V AC 250 V DC
Setting range - thermal overload protection	see table "Order data" on page 1
Rated operational current I_e	see table below
Rated operational current DC-5 I_e 3 conducting paths in series up to 250 V	see "Rated operational current I_e "
Rated instantaneous short-circuit current setting I_i	see table below
Rated service short-circuit breaking capacity I_{cs}	see table "Short-circuit breaking capacity and back-up fuses" on page 7
Rated ultimate short-circuit breaking capacity I_{cu} Rated service short-circuit breaking capacity DC I_{cs} 3 conducting paths in series up to 250 V	10 kA
Trip class	see table "Order data" on page 1
Rated frequency	DC, 50/60 Hz
Number of poles	3
Resistance per pole	see table "Resistance and power loss per pole"
Power loss per pole	on page 3

Isolation data	
Rated impulse withstand voltage U_{imp}	6 kV
Rated insulation voltage U_i	690 V
Pollution degree	3

Electrical connection		MS132 ≤ 10 A	MS132-12, -16	MS132-20, -25, -32
Connecting capacity	solid	1/2 x 1 ... 4 mm ²		1/2 x 2.5 ... 6 mm ²
	stranded	1/2 x 1 ... 4 mm ²		1/2 x 2.5 ... 6 mm ²
	flexible with ferrule	1/2 x 0.75 ... 2.5 mm ²		1/2 x 1 ... 6 mm ²
	flexible with ferrule insulated	1/2 x 0.75 ... 2.5 mm ²		1/2 x 1 ... 6 mm ²
	flexible without ferrule	1/2 x 0.75 ... 2.5 mm ²		1/2 x 2.5 ... 6 mm ²
Stripping length		9 mm	10 mm	10 mm
Tightening torques		0.8 ... 1.2 Nm	1.5 Nm	2 Nm
Connection screw		M3.5 (Pozidrive 2)	M4 (Pozidrive 2)	M4 (Pozidrive 2)

Type	Rated instantaneous short-circuit current setting I_i A	Rated operational current I_e A
MS132-0.16	1.56	0.16
MS132-0.25	2.44	0.25
MS132-0.4	3.90	0.40
MS132-0.63	6.14	0.63
MS132-1.0	11.50	1.00
MS132-1.6	18.40	1.60
MS132-2.5	28.75	2.50
MS132-4.0	50.00	4.00
MS132-6.3	78.75	6.30
MS132-10	150	10.0
MS132-12	180	12.0
MS132-16	240	16.0
MS132-20	300	20.0
MS132-25	375	25.0
MS132-32	480	32.0

General data

Mechanical durability		10 ⁵
Electrical durability		5 x 10 ⁴
Duty time		100 %
Operating frequency without early tripping		up to 15 operations/h or 60 operations/h with 40 % duty ratio, if the motor breaking current $6 \times I_n$ and the motor starting time does not exceed 1 s
Dimensions (W x H x D)		see drawing "Dimensions" on page 4
Weight		see table "Order data" on page 1
Mounting		DIN-rail (EN 60715)
Mounting position		position 1-6 (optional for single mounting)
Group mounting		on request
Minimum distance to other units same type	horizontal	0 mm
	vertical	150 mm
Minimum distance to electrical conductive board	horizontal, up to 400 V	0 mm
	horizontal, up to 690 V	> 1.5 mm
	vertical	75 mm
Degree of protection	enclosure / terminals	IP20
Utilization category		A
Maximum operating altitude		up to 2000 m
Maximum operating frequency		170 cycles/h

Electromagnetic compatibility

Electromagnetic compatibility		not applicable
-------------------------------	--	----------------

Environmental data

Ambient air temperature		
Operation	open - compensated without derating	-25 ... +60 °C
	open	-25 ... +70 °C
	enclosed (IB132)	0 ... +40 °C
Storage		-50 ... +80 °C
Ambient air temperature compensation		continuous
Vibration (sinusoidal) acc. to IEC/EN 60068-2-6 (Fc)		5g / 3 ... 150 Hz
Shock (half-sine) acc. to IEC/EN 60068-2-27 (Ea)		25g / 11 ms

Standards / directives

Product standard	IEC/EN 60947-2
	IEC/EN 60947-4-1
	IEC/EN 60947-1
	UL 508, CSA 22.2 No. 14
Low Voltage Directive	2006/95/EC
EMC Directive	2004/108/EC
RoHS Directive	2002/95/EC

Short-circuit breaking capacity and back-up fuses

I_{CS} Rated service short-circuit breaking capacity

I_{CU} Rated ultimate short-circuit breaking capacity

° No back-up fuse required, because short-circuit proof up to 100 kA

Type	230 V AC			400 V AC			440 V AC			500 V AC			690 V AC		
	I_{CS} kA	I_{CU} kA	gG A	I_{CS} kA	I_{CU} kA	gG A	I_{CS} kA	I_{CU} kA	gG A	I_{CS} kA	I_{CU} kA	gG A	I_{CS} kA	I_{CU} kA	gG A
MS132-0.16	100	100	°	100	100	°	100	100	°	100	100	°	100	100	°
MS132-0.25	100	100	°	100	100	°	100	100	°	100	100	°	100	100	°
MS132-0.4	100	100	°	100	100	°	100	100	°	100	100	°	100	100	°
MS132-0.63	100	100	°	100	100	°	100	100	°	100	100	°	100	100	°
MS132-1.0	100	100	°	100	100	°	100	100	°	100	100	°	100	100	°
MS132-1.6	100	100	°	100	100	°	100	100	°	100	100	°	100	100	°
MS132-2.5	100	100	°	100	100	°	100	100	°	100	100	°	100	100	°
MS132-4.0	100	100	°	100	100	°	20	20	on request	20	20	on request	3	3	on request
MS132-6.3	100	100	°	100	100	°	20	20	on request	20	20	on request	3	3	on request
MS132-10	100	100	°	100	100	°	20	20	on request	20	20	on request	3	3	on request
MS132-12	100	100	°	100	100	°	20	20	on request	20	20	on request	3	3	on request
MS132-16	100	100	°	100	100	°	20	20	on request	20	20	on request	3	3	on request
MS132-20	100	100	°	100	100	°	20	20	on request	20	20	on request	3	3	on request
MS132-25	50	50	100	50	50	100	20	20	on request	10	10	on request	3	3	on request
MS132-32	25	50	125	25	50	125	20	20	on request	10	10	on request	3	3	on request

Technical data UL/CSA

Main circuit

Maximum operational voltage		600 V
Manual Motor Controller ratings		see table "UL 508 — Manual Motor Controller" on page 8
Motor ratings	Horse power	see table below
	Full load amps (FLA)	see table below
	Locked rotor amps (LRA)	see table below

Electrical connection		MS132 ≤ 10 A	MS132-12, -16	MS132-20, -25, -32
Connecting capacity	stranded	1/2 x AWG 16 ... 12		1/2 x AWG 12 ... 8
	flexible without ferrule	1/2 x AWG 16 ... 12		1/2 x AWG 12 ... 8
Stripping length		9 mm	10 mm	10 mm
Tightening torques		10 ... 12 lb-in	14 lb-in	18 lb-in
Connection screw		M3.5 (Pozidrive 2)	M4 (Pozidrive 2)	M4 (Pozidrive 2)

Motor rating, single phase

hp Horse power

FLA Full load amps

LRA Locked rotor amps

Type	220 ... 240 V AC			440 ... 480 V AC		
	hp	FLA	LRA	hp	FLA	LRA
MS132-0.16	-	0.16	0.96	-	0.16	0.96
MS132-0.25	-	0.25	1.5	-	0.25	1.5
MS132-0.4	-	0.4	2.4	-	0.4	2.4
MS132-0.63	-	0.63	3.78	-	0.63	3.78
MS132-1.0	-	1	6	-	1	6
MS132-1.6	1/10	1.6	9.6	-	1.6	9.6
MS132-2.5	1/6	2.5	15	1/2	2.5	15
MS132-4.0	1/3	4	24	1/2	4	24
MS132-6.3	1/2	6.3	37.8	1	6.3	37.8
MS132-10	1-1/2	10	60	3	8.5	46
MS132-12	2	12	72	3	8.5	64
MS132-16	2	12	72	5	14	81
MS132-20	3	17	92	5	14	81
MS132-25	3	17	127	7-1/2	21	116
MS132-32	5	28	162	10	26	145

Motor rating, three phase

hp Horse power

FLA Full load amps

LRA Locked rotor amps

Type	110 ... 120 V AC			220 ... 240 V AC			440 ... 480 V AC			500 ... 600 V AC		
	hp	FLA	LRA	hp	FLA	LRA	hp	FLA	LRA	hp	FLA	LRA
MS132-0.16	-	0.16	0.96	-	0.16	0.96	-	0.16	0.96	-	0.16	0.96
MS132-0.25	-	0.25	1.5	-	0.25	1.5	-	0.25	1.5	-	0.25	1.5
MS132-0.4	-	0.4	2.4	-	0.4	2.4	-	0.4	2.4	-	0.4	2.4
MS132-0.63	-	0.63	3.78	-	0.63	3.78	-	0.63	3.78	-	0.63	3.78
MS132-1.0	-	1	6	-	1	6	-	1	6	1/2	1	6
MS132-1.6	-	1.6	9.6	-	1.6	9.6	3/4	1.6	9.6	3/4	1.6	9.6
MS132-2.5	-	2.5	15	1/2	2.5	15	1	2.5	15	1-1/2	2.5	15
MS132-4.0	-	4	24	1	4	24	2	4	24	3	3.9	26
MS132-6.3	1/2	6.3	37.8	1-1/2	6.3	37.8	3	4.8	32	5	6.1	37
MS132-10	3/4	10	60	3	9.6	64	5	7.6	46	7-1/2	9	51
MS132-12	1-1/2	12	72	3	9.6	64	7-1/2	11	64	10	11	65
MS132-16	2	16	84	5	15.2	92	10	14	81	10	11	65
MS132-20	3	19.2	128	5	15.2	92	10	14	81	15	17	93
MS132-25	3	19.2	128	7-1/2	22	127	15	21	116	20	22	116
MS132-32	5	30.4	184	10	28	162	20	27	145	25	27	146

Manual Motor Controller for Motor Disconnect

Type	Maximum short-circuit current rating	
	480 V	600 V
	kA	kA
MS132-0.16	65	47
MS132-0.25	65	47
MS132-0.4	65	47
MS132-0.63	65	47
MS132-1.0	65	47
MS132-1.6	65	47
MS132-2.5	65	47
MS132-4.0	65	18
MS132-6.3	65	18
MS132-10	65	18
MS132-12	30	18
MS132-16	30	18
MS132-20	30	18
MS132-25	30	18
MS132-32	30	18

Manual Motor Controller for Group Installation

Type	Maximum short-circuit current rating	
	480 V	600 V
	kA	kA
MS132-0.16	65	47
MS132-0.25	65	47
MS132-0.4	65	47
MS132-0.63	65	47
MS132-1.0	65	47
MS132-1.6	65	47
MS132-2.5	65	47
MS132-4.0	65	30
MS132-6.3	65	30
MS132-10	65	30
MS132-12	30	30
MS132-16	30	30
MS132-20	30	30
MS132-25	30	30
MS132-32	30	30

Manual Motor Controller for Group Installation in combination with current limiter S803W-SCLxxx-SR

Type	Maximum short-circuit current rating	
	480 V	600 V
	kA	kA
MS132-0.16	65	65
MS132-0.25	65	65
MS132-0.4	65	65
MS132-0.63	65	65
MS132-1.0	65	65
MS132-1.6	65	65
MS132-2.5	65	65
MS132-4.0	65	65
MS132-6.3	65	65
MS132-10	65	65
MS132-12	65	65
MS132-16	65	65
MS132-20	65	65
MS132-25	65	65
MS132-32	65	65

Self-Protected Combination Motor Controller (Type E) and Combination Motor Controller (Type F)

Type	UL 508 Self-Protected Combination Motor Controller (Type E) in combination with feeder block S1-M3-xx		UL 508 Combination Motor Controller (Type F)		UL 508 Manual Motor Controller for Tap Conductor Protection	
	Maximum short-circuit current rating		Maximum short-circuit current rating	Minimum contactor size	Maximum short-circuit current rating	
	480Y / 277 V kA	600Y / 347 V kA	480Y / 277 V kA		480 V kA	600 V kA
MS132-0.16	65	47	30	AF26...AF38	65	47
MS132-0.25	65	47	30	AF26...AF38	65	47
MS132-0.4	65	47	30	AF26...AF38	65	47
MS132-0.63	65	47	30	AF26...AF38	65	47
MS132-1.0	65	47	30	AF26...AF38	65	47
MS132-1.6	65	47	30	AF26...AF38	65	47
MS132-2.5	65	47	30	AF26...AF38	65	47
MS132-4.0	65	18	30	AF26...AF38	65	18
MS132-6.3	65	-	30	AF26...AF38	65	18
MS132-10	65	-	30	AF26...AF38	65	18
MS132-12	30	-	30	AF26...AF38	30	18
MS132-16	30	-	30	AF26...AF38	30	18
MS132-20	30	-	30	AF26...AF38	30	18
MS132-25	30	-	30	AF26...AF38	30	18
MS132-32	30	-	30	AF26...AF38, A40	30	18

Self-Protected Combination Motor Controller (Type E) and Combination Motor Controller (Type F) in combination with current limiter S803W-SCLxxx-SR

Type	UL 508 Self-Protected Combination Motor Controller (Type E) in combination with current limiter S803W-SCLxxx-SR		UL 508 Combination Motor Controller (Type F) in combination with current limiter S803W-SCLxxx-SR	
	Maximum short-circuit current rating		Maximum short-circuit current rating	Minimum contactor size
	480Y / 277 V kA		480Y / 277 V kA	
MS132-0.16	65		65	AF26...AF38
MS132-0.25	65		65	AF26...AF38
MS132-0.4	65		65	AF26...AF38
MS132-0.63	65		65	AF26...AF38
MS132-1.0	65		65	AF26...AF38
MS132-1.6	65		65	AF26...AF38
MS132-2.5	65		65	AF26...AF38
MS132-4.0	65		65	AF26...AF38
MS132-6.3	65		65	AF26...AF38
MS132-10	65		65	AF26...AF38
MS132-12	65		-	-
MS132-16	65		-	-
MS132-20	65		-	-
MS132-25	65		-	-
MS132-32	65		-	-