

S800 IEC Series High performance circuit breakers



S800

High performance circuit breakers
IEC Series



Description

The S800 high performance MCB offers a compact solution to circuit protection. The S800 devices are IEC tested current limiting and DIN rail mounted. The S800 is available with application-specific trip characteristics to provide maximum circuit protection.

The breakers offer thermal-magnetic trip protection according to B, C, D & K characteristics.

For the worldwide market, the breakers carry CSA, IEC, CE and many other agency approvals.

Features

- Current limiting
- Fast breaking time (2.3 – 2.5 ms)
- Wide range of accessories
- DIN rail mounting
- Finger safe terminals
- Multi-function terminals
- Ring tongue compatible

S800S

Amperage	10 – 125 A
Voltage	690 VAC
Poles	1, 2, 3, 4
Trip characteristics	B, C, D, K
Interrupting ratings	50 kA : IEC
Auxiliary contacts	Yes
Bell alarm	Yes
Shunt trip	Yes
Undervoltage release	Yes
Ring tongue	Yes

S800S-B, 690 VAC IEC

B



S801U-B



S802U-B



S803U-B



S804U-B

No. of poles	Rated current	Catalog number	No. of poles	Rated current	Catalog number
1	10	S801S-B10	3	10	S803S-B10
	13	S801S-B13		13	S803S-B13
	16	S801S-B16		16	S803S-B16
	20	S801S-B20		20	S803S-B20
	25	S801S-B25		25	S803S-B25
	32	S801S-B32		32	S803S-B32
	40	S801S-B40		40	S803S-B40
	50	S801S-B50		50	S803S-B50
	63	S801S-B63		63	S803S-B63
	80	S801S-B80		80	S803S-B80
	100	S801S-B100		100	S803S-B100
	125	S801S-B125		125	S803S-B125
2	10	S802S-B10	4	10	S804S-B10
	13	S802S-B13		13	S804S-B13
	16	S802S-B16		16	S804S-B16
	20	S802S-B20		20	S804S-B20
	25	S802S-B25		25	S804S-B25
	32	S802S-B32		32	S804S-B32
	40	S802S-B40		40	S804S-B40
	50	S802S-B50		50	S804S-B50
	63	S802S-B63		63	S804S-B63
	80	S802S-B80		80	S804S-B80
	100	S802S-B100		100	S804S-B100
	125	S802S-B125		125	S804S-B125

Tripping characteristic B

IEC
690 VAC
50 kA


Resistive loads

- B Curve
- Designed for use in cable protection applications
- Example: control circuits, lighting

Accessories & technical data

Accessories – See page 15.52

Technical data – See page 15.76 - 15.82

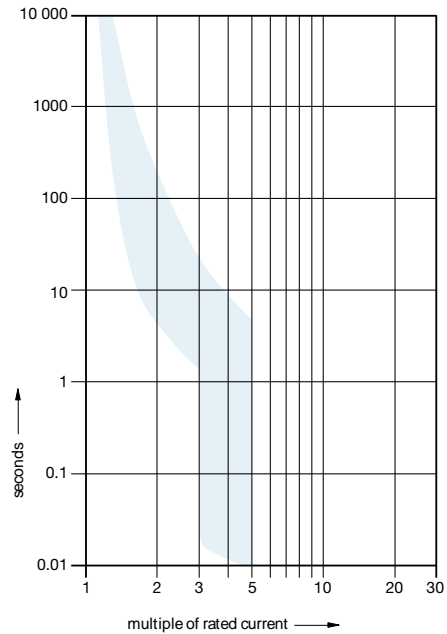

S800S-C, 690 VAC IEC

C



S801S-C



S802S-C



S803S-C



S804S-C

No. of poles	Rated current	Catalog number	No. of poles	Rated current	Catalog number
1	10	S801S-C10	3	10	S803S-C10
	13	S801S-C13		13	S803S-C13
	16	S801S-C16		16	S803S-C16
	20	S801S-C20		20	S803S-C20
	25	S801S-C25		25	S803S-C25
	32	S801S-C32		32	S803S-C32
	40	S801S-C40		40	S803S-C40
	50	S801S-C50		50	S803S-C50
	63	S801S-C63		63	S803S-C63
	80	S801S-C80		80	S803S-C80
2	100	S801S-C100	4	100	S803S-C100
	125	S801S-C125		125	S803S-C125
	10	S802S-C10		10	S804S-C10
	13	S802S-C13		13	S804S-C13
	16	S802S-C16		16	S804S-C16
	20	S802S-C20		20	S804S-C20
	25	S802S-C25		25	S804S-C25
	32	S802S-C32		32	S804S-C32
	40	S802S-C40		40	S804S-C40
	50	S802S-C50		50	S804S-C50
63	S802S-C63	63	S804S-C63		
80	S802S-C80	80	S804S-C80		
100	S802S-C100	100	S804S-C100		
125	S802S-C125	125	S804S-C125		

Tripping characteristic C


IEC
690 VAC
50 kA

Resistive loads

- C Curve
- Designed for use with medium magnetic start up currents
- Example: lighting, control panels

Accessories & technical data

Accessories – See page 15.52
Technical data – See page 15.76 - 15.82

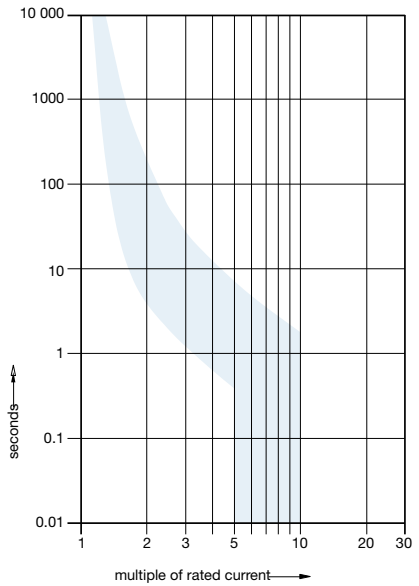

S800S-D, 690 VAC IEC

D



S801S-D



S802S-D



S803S-D



S804S-D

No. of poles	Rated current	Catalog number	No. of poles	Rated current	Catalog number
1	10	S801S-D10	3	10	S803S-D10
	13	S801S-D13		13	S803S-D13
	16	S801S-D16		16	S803S-D16
	20	S801S-D20		20	S803S-D20
	25	S801S-D25		25	S803S-D25
	32	S801S-D32		32	S803S-D32
	40	S801S-D40		40	S803S-D40
	50	S801S-D50		50	S803S-D50
	63	S801S-D63		63	S803S-D63
	80	S801S-D80		80	S803S-D80
2	100	S801S-D100	4	100	S803S-D100
	125	S801S-D125		125	S803S-D125
	10	S802S-D10		10	S804S-D10
	13	S802S-D13		13	S804S-D13
	16	S802S-D16		16	S804S-D16
	20	S802S-D20		20	S804S-D20
	25	S802S-D25		25	S804S-D25
	32	S802S-D32		32	S804S-D32
	40	S802S-D40		40	S804S-D40
	50	S802S-D50		50	S804S-D50
63	S802S-D63	63	S804S-D63		
80	S802S-D80	80	S804S-D80		
100	S802S-D100	100	S804S-D100		
125	S802S-D125	125	S804S-D125		

Tripping characteristic D

IEC
690 VAC
50 kA


Inductive loads

- D Curve
- Designed for allowing higher in-rush currents during system start up
- Example: motors, transformers

Accessories & technical data

Accessories – See page 15.52

Technical data – See page 15.76 - 15.82

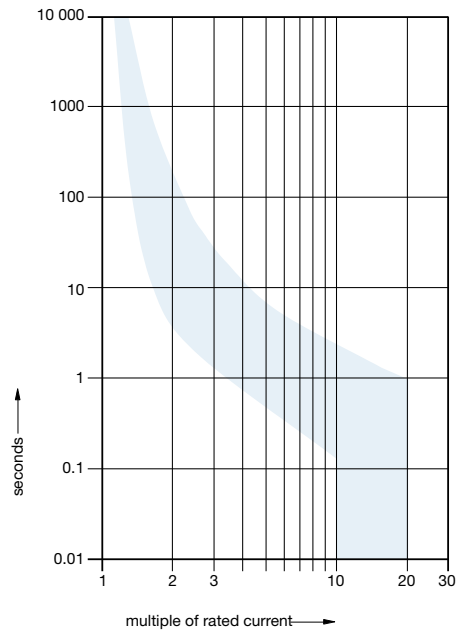

S800S-K, 690 VAC IEC

K



S801S-K



S802S-K



S803S-K



S804S-K

No. of poles	Rated current	Catalog number	No. of poles	Rated current	Catalog number
1	10	S801S-K10	3	10	S803S-K10
	13	S801S-K13		13	S803S-K13
	16	S801S-K16		16	S803S-K16
	20	S801S-K20		20	S803S-K20
	25	S801S-K25		25	S803S-K25
	32	S801S-K32		32	S803S-K32
	40	S801S-K40		40	S803S-K40
	50	S801S-K50		50	S803S-K50
	63	S801S-K63		63	S803S-K63
	80	S801S-K80		80	S803S-K80
2	10	S802S-K10	4	10	S804S-K10
	13	S802S-K13		13	S804S-K13
	16	S802S-K16		16	S804S-K16
	20	S802S-K20		20	S804S-K20
	25	S802S-K25		25	S804S-K25
	32	S802S-K32		32	S804S-K32
	40	S802S-K40		40	S804S-K40
	50	S802S-K50		50	S804S-K50
	63	S802S-K63		63	S804S-K63
	80	S802S-K80		80	S804S-K80
100	S802S-K100	100	S804S-K100		
125	S802S-K125	125	S804S-K125		

Tripping characteristic K


IEC
690 VAC
50 kA

Inductive loads

- K Curve
- Designed for allowing higher in-rush currents during system start up
- Example: motors, transformers

Accessories & technical data

Accessories – See page 15.52
Technical data – See page 15.76 - 15.82

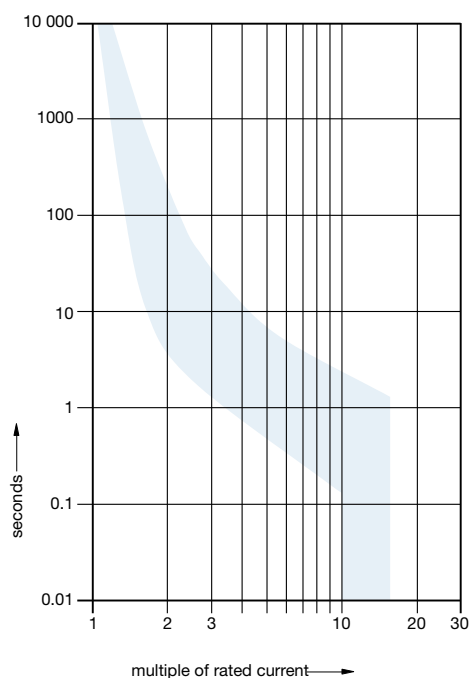

Accessories

S800U & S800S

UL & IEC



S800-SOR

Shunt trip

For remote tripping of breaker, a shunt trip device can be added to the MCB. The device opens the breaker after control voltage is applied.

Description (for field mounting, left side)	Catalog number
Shunt operation release 24 VAC/DC	S800-SOR24
Shunt operation release 48...130 VAC/DC	S800-SOR130
Shunt operation release 110...250 VAC/DC	S800-SOR250



S800-UVR

Undervoltage release

When control voltage drops below approximately 50 % of rated voltage, the UVR opens the breaker. The breaker can not be operated unless proper control voltage is first applied to the UVR coil.

Description	Catalog number
Under voltage release 24...36 VAC/DC	S800-UVR36
Under voltage release 48...60 VAC/DC	S800-UVR60
Under voltage release 110...130 VAC/DC	S800-UVR130
Under voltage release 220...250 VAC/DC	S800-UVR250



S800-AUX

Auxiliary contacts

The auxiliary contacts will signal whether the breaker is in the ON or OFF position.

Description	Catalog number
Auxiliary contact	S800-AUX



S800-AUX/ALT

Bell alarm

The bell alarm includes a set of contacts that will only signal when the breaker has tripped. Typically the contacts would be connected to an alarm or bell to signal the operator that an overcurrent trip has occurred. The bell alarm also includes a test button for testing the alarm contacts without opening the breaker.

Description	Catalog number
Bell alarm	S800-AUX/ALT

Accessories

S800U & S800S

UL & IEC



S800-RT2125

Ring tongue adaptor

Description	Catalog number
Ring terminal cable connection, 40-125A	S800-RT2125




S800-RD

Rotary operating mechanism


Allows “through the door” operation.

Description	Catalog number
Handle mechanism	S800-RD



S800-RHE-H

Description	Catalog number
Grey rotary handle	S800-RHE-H



S800-RHE-EM

Description	Catalog number
Red rotary handle	S800-RHE-EM



S800-RHE-S

Description	Catalog number
Shaft extension	S800-RHE-S



S800U-PLL

UL Locking device

Description	Catalog number
Padlock not included	S800U-PLL

		S800U	
Characteristics		K, Z	
Rated operational current I_n	[A]	10...100	
Pole		1..4	
Rated operational voltage U_n compliant to UL 489			
(AC)	50/60 Hz	[V]	240
Rated ultimate short-circuit breaking capacity compliant to UL489			
(AC)	50/60 Hz	240 V	Single-pole [kA] 30
(AC)	50/60 Hz	240 V	Multipole [kA] 50
Rated operational voltage U_n compliant to IEC 60947-2			
(AC)		[V]	240/415
Rated ultimate short-circuit breaking capacity I_{cu} compliant to IEC 60947-2			
(AC)	50/60 Hz	240/415 V	Single-pole [kA] 30
(AC)	50/60 Hz	240/415 V	Multipole [kA] 50
Rated service short-circuit breaking capacity I_{cs} compliant to IEC 60947-2			
(AC)	50/60 Hz	240/415 V	Single-pole [kA] 25
(AC)	50/60 Hz	240/415 V	Multipole [kA] 40
Connections C_u		10...30 A	14-2 AWG
		40...100 A	8-1 AWG
Rated frequency		50/60	
Tightening torque	[Hz]	3,5 (31 in.lb.)	
Protection category	[Nm]	IP40 (actuating end only)	
Mounting position		any	
Contacts		cadmium-free	
Permissible ambient temperature	[°C]	-25...+60	
Standards		UL 489 IEC 60947-2 CSA22.2 NO.5-02	
Approval		cULus File E312425	

Technical data

S800U

UL

Typical internal resistances and power losses at 25°C ambient temperature

Rated current I_n	Internal resistance R_i	Power loss P_v
[A]	[mΩ] K, Z	[W] K, Z
10	15.2	1.5
15	12.1	2.7
20	8.7	3.5
25	6.8	4.2
30	3.1	2.8
40	2.3	3.7
50	1.7	4.3
60	1.6	5.8
70	1.0	4.9
80	1.0	6.4
90	0.8	6.5
100	0.8	8.3

Influence of ambient temperature

Devices mounted singly (specifications in A)

S800U-K, -Z

I_n [A]	10°C	15°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C	55°C	60°C
10	10.9	10.7	10.4	10.0	9.6	9.3	9.0	8.7	8.4	8.0	7.6
15	16.5	16.0	15.6	15.0	14.4	14.0	13.5	13.0	12.6	12.0	11.4
20	22.0	21.4	20.8	20.0	19.2	18.6	18.0	17.4	16.8	16.0	15.2
25	27.5	26.8	26.0	25.0	24.0	23.3	22.5	21.8	21.0	20.0	19.0
30	33.1	32.1	31.2	30.0	28.8	27.9	27.0	26.1	25.2	24.0	22.9
40	44.0	42.8	41.6	40.0	38.4	37.2	36.0	34.8	33.6	32.0	30.9
50	55.1	53.5	52.0	50.0	48.0	46.5	45.0	43.5	42.0	40.0	38.3
60	66.2	64.2	62.4	60.0	57.6	55.8	54.0	52.2	50.4	48.0	46.0
70	76.9	74.9	72.8	70.0	67.2	65.1	63.0	60.9	58.8	56.0	53.4
80	88.0	85.6	83.2	80.0	76.8	74.4	72.0	69.6	67.1	64.0	61.6
90	99.1	96.3	93.6	90.0	86.4	83.7	81.0	78.3	75.6	72.0	69.5
100	110.5	107.0	104.0	100.0	96.0	93.0	90.0	87.0	83.8	80.0	77.8

Technical data

S800S

IEC

Internal resistance and power loss

Internal resistance per pole in mΩ, power loss per pole in W

Type	Rated current A	Device series	Power loss
		B C D K mΩ	B C D K W
S800S	10	15.2	1.5
	13	12.1	2.0
	16	12.1	3.1
	20	8.7	3.5
	25	6.8	4.2
	32	3.1	3.1
	40	2.3	3.7
	50	1.7	4.3
	63	1.6	6.2
	80	1.0	6.4
	100	0.8	8.3
	125	0.6	9.4

Temperature derating

Max. operating current values depending on the ambient temperature for a circuit-breaker in load circuit of type B, C, D, & K characteristics.

S800S-B, -C, -D In [A]	Ambient temperature T (°C/°F)										
	10/50	15/59	20/68	25/77	30/86	35/95	40/104	45/113	50/122	55/131	60/140
10	11.2	11.0	10.7	10.4	10.0	9.6	9.3	9.0	8.7	8.4	8.0
13	14.6	14.3	13.9	13.5	13.0	12.5	12.1	11.7	11.3	10.9	10.4
16	17.9	17.6	17.1	16.6	16.0	15.4	14.9	14.4	13.9	13.4	12.8
20	22.4	22.0	21.4	20.8	20.0	19.2	18.6	18.0	17.4	16.8	16.0
25	28.0	27.5	26.8	26.0	25.0	24.0	23.3	22.5	21.8	21.0	20.0
32	35.8	35.2	34.2	33.3	32.0	30.7	29.8	28.8	27.8	26.9	25.6
40	44.8	44.0	42.8	41.6	40.0	38.4	37.2	36.0	34.8	33.6	32.0
50	56.0	55.0	53.5	52.0	50.0	48.0	46.5	45.0	43.5	42.0	40.0
63	70.6	69.3	67.4	65.5	63.0	60.5	58.6	56.7	54.8	52.9	50.4
80	89.6	88.0	85.6	83.2	80.0	76.8	74.4	72.0	69.6	67.2	64.0
100	112.0	110.0	107.0	104.0	100.0	96.0	93.0	90.0	87.0	84.0	80.0
125	140.0	137.5	133.8	130.0	125.0	120.0	116.3	112.5	108.8	105.0	100.0

15


S800S-K In [A]	Ambient temperature T (°C/°F)										
	10/50	15/59	20/68	25/77	30/86	35/95	40/104	45/113	50/122	55/131	60/140
10	11.9	11.6	11.2	11.0	10.7	10.4	10.0	9.6	9.3	9.0	8.7
13	15.6	15.1	14.6	14.3	13.9	13.5	13.0	12.5	12.1	11.7	11.3
16	19.1	18.6	17.9	17.6	17.1	16.6	16.0	15.4	14.9	14.4	13.9
20	23.9	23.2	22.4	22.0	21.4	20.8	20.0	19.2	18.6	18.0	17.4
25	29.9	29.1	28.0	27.5	26.8	26.0	25.0	24.0	23.3	22.5	21.8
32	38.2	37.2	35.8	35.2	34.2	33.3	32.0	30.7	29.8	28.8	27.8
40	47.8	46.5	44.8	44.0	42.8	41.6	40.0	38.4	37.2	36.0	34.8
50	59.7	58.1	56.0	55.0	53.5	52.0	50.0	48.0	46.5	45.0	43.5
63	75.3	73.2	70.6	69.3	67.4	65.5	63.0	60.5	58.6	56.7	54.8
80	95.6	93.0	89.6	88.0	85.6	83.2	80.0	76.8	74.4	72.0	69.6
100	119.5	116.2	112.0	110.0	107.0	104.0	100.0	96.0	93	90.0	87.0
125	149.4	145.3	140.0	137.5	133.8	130.0	125.0	120.0	116.3	112.5	108.8

Technical data


S800S

IEC


Tripping Characteristic B

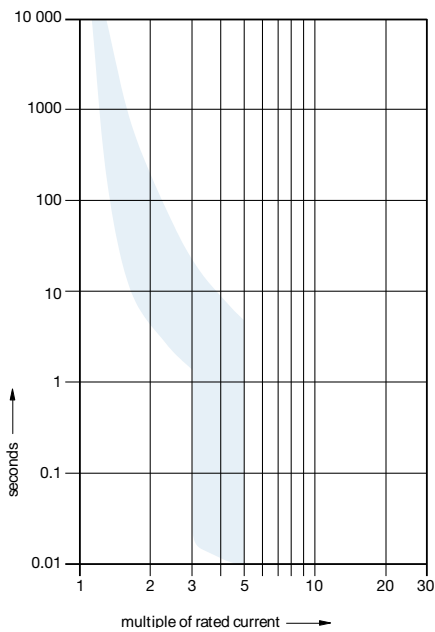


Tripping Characteristic C

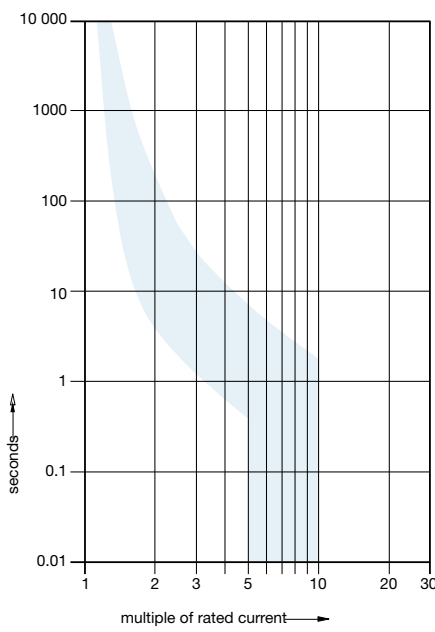


Tripping Characteristic D

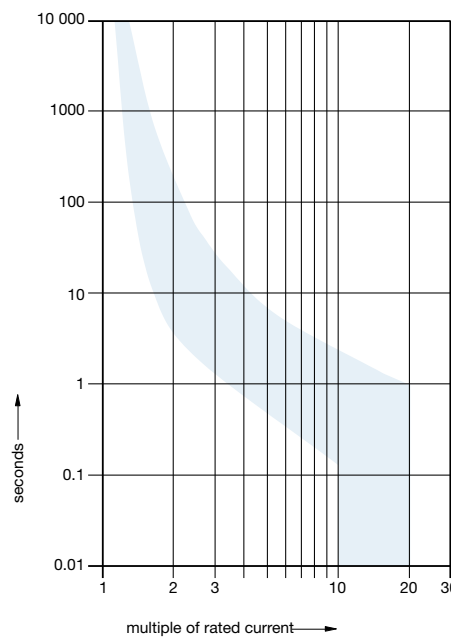

Tripping Characteristic K

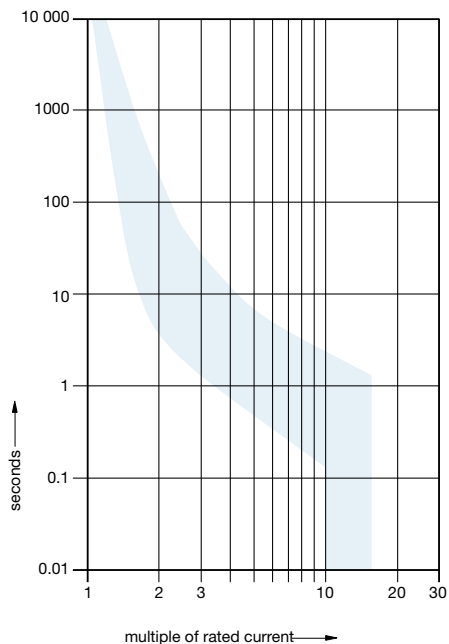

Tripping Characteristic Z

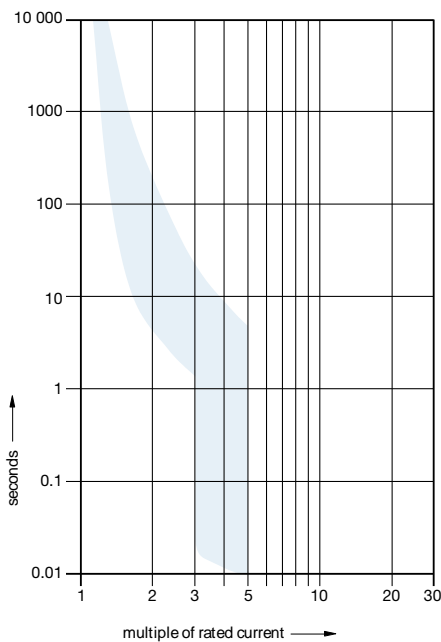

Technical data S800U & S800S Accessories

Auxiliary contact S800-AUX

	S800-AUX
Usage category	AC15 400/2 A-UL AC15 240/ -UL DC13 250/0.55 A125 V/1.1A-IEC DC13 125 V/1.1A DC13 60 V/2A DC13 24 V/4A
Continuous thermal current I_n	6 A
Rated insulation voltage U_i	690 V
Number of contacts	2
Surge U_{test} (1.2/50 μ s)	6 kV
Degree of protection	3
Function of contact	Changeover contacts
Connection Cu	1 x 2.5 mm ² 2 x 1.5 mm ²
Tightening torque	1 Nm
Ensured contacts during shake test acc. to IEC 68-2-6	5g, 20 frequency cycle at 24 VAC/DC, 5mA brief interrupt <10 ms
AC/DC supply	any EN 60715
Mounting on DIN top hat rail	EN 60715 IP20
Type of protection	IP20
Permissible ambient temperature for operations	-25...+60 °C; -13 °F... 140 °F
Storage temperature	-40...+70 °C; -40 °F... 158 °F
Mechanical device service life	6000 switching cycles
I_{cu} with S450E	1000 A
Resistance to vibration	IEC 60068-2-27; IEC 60068-2; EN 61373 Cat.1/class B

Undervoltage release S800-UVR

	S800-UVR36	S800-UVR60	S800-UVR130	S800-UVR250
Rated voltage U_e	24...36 VAC/DC	48...60 VAC/DC	110...130 VAC/DC	220...250 VAC/DC
Operating range				
Operating opening	35...70% U_e			
Operating closing	85% U_e			
Rated insulation voltage U_i	690 V			
Coil pull in consumption	1 W, 14 vA	1 W, 25 vA	1 W, 41 vA	1 W, 91 vA
Rated frequency	DC; 50/60 Hz			
Protection degree	3			
Connection Cu	1...35 cable			
Tightening torque	min.3/ max.4 Nm			
AC/DC supply	any			
DIN top hat rail	EN 60715			
Type of protection	IP20 IP40 (only actuation side)			
Permissible ambient temperature of operations	-25...+60 °C; -13 °F... 140 °F			
Storage temperature	-40...+70 °C; -40 °F... 158 °F			
Resistance to vibration	IEC 60068-2-27; IEC 60068-2; EN61373 Cat.1/class B			

Technical data

S800U & S800S

Accessories

Miniature
circuit breakers
S800

Combined auxiliary and bell alarm

Usage category	AC15 400/2A-UL AC15 240/6A-UL DC13 250/0.55A125V/1.1A-IEC DC13 125V/1.1A-IEC DC13 60V/2A DC13 24V/4A
Continuous thermal current I_n	6 A
Rated insulation voltage U_i	690 V
Number of contacts	2 (1x AUX, 1 x AUX/ALT)
Surge U_{test} (1.2/50 μ s)	6 kV
Degree of protection	3
Function of contact	Changeover contacts
Connection Cu	1 x 2.5 mm ² 2 x 1.5 mm ²
Tightening torque	1 Nm
Ensured contacts during shake test acc. to IEC 68-2-6	5g, 20 frequency cycle 5...150...5Hz at 24VAC/DC, 5mA brief interrupt <10ms
AC/DC supply	any EN 60715
Mounting on DIN top hat rail	EN 60715
Type of protection	IP20
Permissible ambient temperature for operations	-25 °C... 60 °C; -13 °F... 140 °F
Storage temperature	-40 °C... 70 °C; -40 °F... 150 °F
mech. Device service life	6000 switching cycles
I_{cu} with S450E	1000 A
Resistance to vibration	IEC 60068-2-27; IEC 60068-2; EN 61373 Cat.1/class B

Shunt operation release – S800-SOR

	S800-SOR24	S800-SOR130	S800-SOR250	S800-SOR400
Rated voltage U_e	24 VAC/DC	48...130 VAC/DC	110...250 VAC/DC	220...250
Operating range	70... 110% U_e			
Rated insulation voltage U_i	690 V			
Coil pull in consumption	19.2 W/vA	On request		
Rated frequency	DC; 50/60 Hz			
Degree of protection	3			
Connection Cu	1...35 AWG			
Tightening torque	min.3/ max.4 Nm			
AC/DC supply	any			
DIN top hat rail	EN 60715			
Type of protection	IP20; IP40 (only actuation side)			
Permissible ambient temperature of operations	-25 °C... 60 °C; -13 °F... 140 °F			
Storage temperature	-40 °C... 70 °C; -40 °F... 158 °F			
Resistance to vibration	IEC 60068-2-27; IEC 60068-2; EN61373 Cat.1/class B			

Technical data

Backup

S800S - S200 @ 230/400 V

L.	Char.	E.											
		S800S											
		B, C, D, K											
I _{cu} [kA]	I _n [A]	50											
		S200	B	6	6	50	50	50	50	50	50	50	50
10	50				50	50	50	50	50	50	50	50	50
13	50				50	50	50	50	50	50	50	50	50
16	50				50	50	50	50	50	50	50	50	50
20					50	50	50	50	50	50	50	50	50
25						50	50	50	50	50	50	50	50
32							50	50	50	50	50	50	50
40								50	50	50	50	50	50
50									50	50	50	50	50
63										50	50	50	50

L.	Char.	E.										
		S800S										
		B, C, D, K										
I _{cu} [kA]	I _n [A]	50										
		S200P	B	25	6...16	50	50	50	50	50	50	50
20					50	50	50	50	50	50	50	50
25						50	50	50	50	50	50	50
15	32						50	50	50	50	50	50
	40							50	50	50	50	50
	50								50	50	50	50
63								50	50	50		

L.	Char.	E.										
		S800S										
		B, C, D, K										
I _{cu} [kA]	I _n [A]	50										
		S200	C	6	0.5...6	50	50	50	50	50	50	50
8	50				50	50	50	50	50	50	50	50
10	50				50	50	50	50	50	50	50	50
13	50				50	50	50	50	50	50	50	50
16	50				50	50	50	50	50	50	50	50
20					50	50	50	50	50	50	50	50
25						50	50	50	50	50	50	50
32							50	50	50	50	50	50
40								50	50	50	50	50
50									50	50	50	50
63							50	50	50			

L.	Char.	E.										
		S800S										
		B, C, D, K										
I _{cu} [kA]	I _n [A]	50										
		S200P	C	25	0.5...16	50	50	50	50	50	50	50
20					50	50	50	50	50	50	50	50
25						50	50	50	50	50	50	50
15	32						50	50	50	50	50	50
	40							50	50	50	50	50
	50								50	50	50	50
63								50	50	50		

LEGEND

E. = supply side
L. = load side
Back-up limit values are specified in kA

Technical data

Selectivity

S800S - S200 @ 230/400 V

		E.		S800S												
L.		Char.		B												
		I _{cu} [kA]		50												
		I _n [A]		25	32	40	50	63	80	100	125					
S200	B	6	6			0.4	0.5	0.7	1	1.5	2.6					
			10				0.4	0.6	0.7	1	1.4					
			13					0.5	0.7	0.9	1.3					
			16						0.7	0.9	1.3					
			20							0.9	1.3					
			25								0.9	1.3				
			32								0.8	1.1				
			40									0.8	1.1			
			50										1			
			63											0.9		

		E.		S800S												
L.		Char.		B												
		I _{cu} [kA]		50												
		I _n [A]		25	32	40	50	63	80	100	125					
S200	D	6	0.5	T	T	T	T	T	T	T	T	T				
			1	0.8	4.5	T	T	T	T	T	T	T	T			
			1.6	0.5	1	2.3	T	T	T	T	T	T	T			
			2	0.3	0.5	0.7	2.3	T	T	T	T	T	T			
			3		0.4	0.5	0.7	1.2	2.5	T	T	T	T			
			4		0.4	0.4	0.7	1	1.7	3	T	T	T			
			6				0.6	0.8	1.2	2	3.6	T	T			
			8					0.7	0.9	1.3	2	T	T			
			10						0.9	1.3	2	T	T			
			13							1	1.5	T	T			
			16										1.5			
			20													
			25													
			32													
			40													
			50													
			63													

		E.		S800S												
L.		Char.		B												
		I _{cu} [kA]		50												
		I _n [A]		25	32	40	50	63	80	100	125					
S200	C	6	0.5	T	T	T	T	T	T	T	T					
			1	3.3	T	T	T	T	T	T	T	T				
			1.6	0.6	1.3	T	T	T	T	T	T	T				
			2	0.4	0.7	1.3	T	T	T	T	T	T				
			3		0.4	0.6	0.7	1.1	2.6	T	T	T				
			4		0.4	0.6	0.7	1	1.7	3.1	T	T				
			6			0.4	0.5	0.7	1	1.5	2.6	T	T			
			8				0.4	0.6	0.7	1	1.4	T	T			
			10				0.4	0.6	0.7	1	1.4	T	T			
			13					0.5	0.7	0.9	1.3	T	T			
			16						0.7	0.9	1.3	T	T			
			20							0.9	1.3	T	T			
			25								0.9	1.3	T			
			32									0.8	1.1			
			40										0.8	1.1		
50											1					
63												0.9				

		E.		S800S												
L.		Char.		B												
		I _{cu} [kA]		50												
		I _n [A]		25	32	40	50	63	80	100	125					
S200	K	6	0.5	T	T	T	T	T	T	T	T	T				
			1	0.8	5	T	T	T	T	T	T	T	T			
			1.6	0.5	1	2.1	T	T	T	T	T	T	T			
			2	0.3	0.5	0.7	2.1	T	T	T	T	T	T			
			3		0.4	0.5	0.7	1.2	2.5	T	T	T	T			
			4		0.4	0.4	0.7	1	1.7	3	T	T	T			
			6				0.6	0.8	1.2	2	3.6	T	T			
			8					0.7	0.9	1.3	2	T	T			
			10						0.9	1.3	2	T	T			
			13							1	1.5	T	T			
			16										1.5			
			20													
			25													
			32													
			40													
			50													
			63													

LEGEND

E. = supply side
L. = load side
Back-up limit values are specified in kA

Technical data

Selectivity

S800S - S200 @ 230/400 V

L.	Char.	E.		S800S											
		I _n [A]	I _{cu} [kA]	C											
				50											
S200	B	6	6	0.4	0.5	0.7	0.9	1.4	2.4	4.8					
			10	0.3	0.4	0.5	0.7	0.9	1.3	2					
			13		0.3	0.4	0.5	0.7	0.9	1.3	1.9				
			16		0.3	0.4	0.5	0.7	0.9	1.3	1.9				
			20			0.4	0.5	0.7	0.9	1.2	1.8				
			25			0.4	0.5	0.7	0.9	1.2	1.8				
			32				0.5	0.6	0.8	1	1.4				
			40					0.6	0.8	1	1.4				
			50						0.7	0.9	1.3				
			63							0.9	1.2				

L.	Char.	E.		S800S											
		I _n [A]	I _{cu} [kA]	C											
				50											
S200	D	6	0.5	T	T	T	T	T	T	T	T	T	T	T	T
			1	2.1	T	T	T	T	T	T	T	T	T	T	T
			1.6	0.8	2.3	T	T	T	T	T	T	T	T	T	T
			2	0.4	0.7	2.3	T	T	T	T	T	T	T	T	T
			3	0.3	0.5	0.7	1.2	2.2	T	T	T	T	T	T	T
			4	0.3	0.4	0.7	1	1.4	2.6	T	T	T	T	T	T
			6		0.4	0.6	0.8	1.1	1.8	3.2	T	T	T	T	T
			8			0.5	0.7	0.9	1.2	1.8	2.8	T	T	T	T
			10				0.7	0.9	1.2	1.8	2.8	T	T	T	T
			13					0.7	1	1.4	2				
			16						1	1.4	2				
			20							1	1.4	2			
			25									1.4			
			32												
			40												
			50												
63															

L.	Char.	E.		S800S									
		I _n [A]	I _{cu} [kA]	C									
				50									
S200	C	6	0.5	T	T	T	T	T	T	T	T	T	T
			1	T	T	T	T	T	T	T	T	T	T
			1.6	0.6	T	T	T	T	T	T	T	T	T
			2	0.5	1	T	T	T	T	T	T	T	T
			3	0.3	0.5	0.7	1.2	2.1	T	T	T	T	T
			4	0.3	0.4	0.7	1	1.5	2.6	T	T	T	T
			6		0.4	0.5	0.7	0.9	1.4	2.4	4.8		
			8		0.3	0.4	0.5	0.7	0.9	1.3	2		
			10		0.3	0.4	0.5	0.7	0.9	1.3	2		
			13		0.3	0.4	0.5	0.7	0.9	1.3	1.9		
			16		0.3	0.4	0.5	0.7	0.9	1.3	1.9		
			20			0.4	0.5	0.7	0.9	1.2	1.8		
			25			0.4	0.5	0.7	0.9	1.2	1.8		
			32				0.5	0.6	0.8	1	1.4		
			40					0.6	0.8	1	1.4		
			50						0.7	0.9	1.3		
63							0.9	1.2					

L.	Char.	E.		S800S									
		I _n [A]	I _{cu} [kA]	C									
				50									
S200	K	6	0.5	T	T	T	T	T	T	T	T	T	T
			1	2.1	T	T	T	T	T	T	T	T	T
			1.6	0.8	2.3	T	T	T	T	T	T	T	T
			2	0.4	0.7	2.3	T	T	T	T	T	T	T
			3	0.3	0.5	0.7	1.2	2.2	T	T	T	T	T
			4	0.3	0.4	0.7	1	1.4	2.6	T	T	T	T
			6		0.4	0.6	0.8	1.1	1.8	3.2	T	T	T
			8			0.5	0.7	0.9	1.2	1.8	2.8	T	T
			10				0.7	0.9	1.2	1.8	2.8	T	T
			13					0.7	1	1.4	2		
			16						1	1.4	2		
			20							1	1.4	2	
			25									1.4	
			32										
			40										
			50										
63													

LEGEND

E. = supply side
L. = load side
Back-up limit values are specified in kA

Technical data

Selectivity

S800S - S200 @ 230/400 V

Miniature
circuit breakers
S800

		E.		S800S							
L.	Char.	I _{cu} [kA]	D								
			50								
			I _n [A]	25	32	40	50	63	80	100	125
S200	B	6	6	0.5	1	1.2	2	2.8	T	T	T
			10	0.4	0.6	0.8	1.1	1.4	2.8	3.9	T
			13	0.4	0.6	0.8	1.1	1.4	2.5	3.3	T
			16		0.6	0.8	1.1	1.4	2.5	3.3	5.6
			20			0.8	1.1	1.3	2.3	3	4.7
			25			0.8	1.1	1.3	2.3	3	4.7
			32				0.9	1.1	1.9	2.4	3.7
			40					1.1	1.9	2.4	3.7
			50						1.5	1.9	2.3
			63							1.7	2.3

		E.		S800S									
L.	Char.	I _{cu} [kA]	D										
			50										
			I _n [A]	25	32	40	50	63	80	100	125		
S200	D	6	0.5	T	T	T	T	T	T	T	T	T	T
			1	T	T	T	T	T	T	T	T	T	T
			1.6	T	T	T	T	T	T	T	T	T	T
			2	2.3	T	T	T	T	T	T	T	T	T
			3	0.7	1.3	4.4	T	T	T	T	T	T	
			4	0.7	1	2.2	4.4	T	T	T	T	T	
			6	0.6	0.8	1.5	2.5	3.6	T	T	T	T	
			8	0.5	0.7	1.1	1.5	2	4	5.5	T	T	
			10	0.5	0.7	1.1	1.5	2	4	5.5	T	T	
			13		0.6	0.9	1.2	1.5	2.6	3.4	5.2	T	
			16			0.9	1.2	1.5	2.6	3.4	5.2	T	
			20				0.9	1.1	1.8	2.2	3.2	T	
			25					1.1	1.8	2.2	3.2	T	
			32						1.7	2	2.9	T	
			40							1.9	2.6	T	
			50								2.2	T	
63									T				

		E.		S800S								
L.	Char.	I _{cu} [kA]	D									
			50									
			I _n [A]	25	32	40	50	63	80	100	125	
S200	C	6	0.5	T	T	T	T	T	T	T	T	T
			1	T	T	T	T	T	T	T	T	T
			1.6	T	T	T	T	T	T	T	T	T
			2	T	T	T	T	T	T	T	T	T
			3	0.7	2.2	4.4	T	T	T	T	T	T
			4	0.7	1.3	2.2	4.4	T	T	T	T	T
			6	0.5	1	1.2	2	2.8	T	T	T	T
			8	0.4	0.6	0.8	1.1	1.4	2.8	3.9	T	T
			10	0.4	0.6	0.8	1.1	1.4	2.8	3.9	T	T
			13	0.4	0.6	0.8	1.1	1.4	2.5	3.3	5.6	T
			16		0.6	0.8	1.1	1.4	2.5	3.3	5.6	T
			20			0.8	1.1	1.3	2.3	3	4.7	T
			25			0.8	1.1	1.3	2.3	3	4.7	T
			32				0.9	1.1	1.9	2.4	3.7	T
			40					1.1	1.9	2.4	3.7	T
			50						1.5	1.9	2.3	T
63							1.7	2.3	T			

		E.		S800S								
L.	Char.	I _{cu} [kA]	D									
			50									
			I _n [A]	25	32	40	50	63	80	100	125	
S200	K	6	0.5	T	T	T	T	T	T	T	T	T
			1	T	T	T	T	T	T	T	T	T
			1.6	T	T	T	T	T	T	T	T	T
			2	2.3	T	T	T	T	T	T	T	T
			3	0.7	1.3	4.4	T	T	T	T	T	T
			4	0.7	1	2.2	4.4	T	T	T	T	T
			6	0.6	0.8	1.5	2.5	3.6	T	T	T	T
			8	0.5	0.7	1.1	1.5	2	4	5.5	T	T
			10	0.5	0.7	1.1	1.5	2	4	5.5	T	T
			13		0.6	0.9	1.2	1.5	2.6	3.4	5.2	T
			16			0.9	1.2	1.5	2.6	3.4	5.2	T
			20				0.9	1.1	1.8	2.2	3.2	T
			25					1.1	1.8	2.2	3.2	T
			32						1.7	2	2.9	T
			40							1.9	2.6	T
			50								2.2	T
63									T			

LEGEND

E. = supply side
L. = load side
Back-up limit values are specified in kA

Technical data

Selectivity

S800S - S200 @ 230/400 V

L.	Char.	E.		S800S									
		I _{cu} [kA]	I _n [A]	B									
				50									
S200P	B	25	6			0.4	0.5	0.7	1	1.5	2.6		
			10			0.4	0.6	0.7	1	1.4			
			13					0.5	0.7	0.9	1.3		
			16						0.7	0.9	1.3		
			20							0.9	1.3		
			25							0.9	1.3		
	15	32							0.8	1.1			
		40							0.8	1.1			
		50								1			
		63									0.9		

L.	Char.	E.		S800S									
		I _{cu} [kA]	I _n [A]	C									
				50									
S200P	B	25	6			0.4	0.5	0.7	1	1.5	2.6		
			10			0.4	0.6	0.7	1	1.4			
			13					0.5	0.7	0.9	1.3		
			16						0.7	0.9	1.3		
			20							0.9	1.3		
			25							0.9	1.3		
	15	32							0.8	1.1			
		40							0.8	1.1			
		50								1			
		63									0.9		

L.	Char.	E.		S800S									
		I _{cu} [kA]	I _n [A]	B									
				50									
S200P	C	25	0.5	T	T	T	T	T	T	T	T	T	T
			1	3.3	T	T	T	T	T	T	T	T	T
			1.6	0.6	1.3	T	T	T	T	T	T	T	T
			2	0.4	0.7	1.2	T	T	T	T	T	T	T
			3			0.6	0.7	1.1	2.6	8.8	T		
			4			0.6	0.7	1	1.7	3.1	7		
	15	6			0.4	0.5	0.7	1	1.5	2.6			
		8				0.4	0.6	0.7	1	1.4			
		10				0.4	0.6	0.7	1	1.4			
		13					0.5	0.7	0.9	1.3			
		16						0.7	0.9	1.3			
		20							0.9	1.3			
		25							0.9	1.3			

L.	Char.	E.		S800S									
		I _{cu} [kA]	I _n [A]	C									
				50									
S200P	C	25	0.5	T	T	T	T	T	T	T	T	T	T
			1	3.3	T	T	T	T	T	T	T	T	T
			1.6	0.6	1.3	T	T	T	T	T	T	T	T
			2	0.4	0.7	1.3	T	T	T	T	T	T	T
			3			0.4	0.6	0.7	1.1	2.6	8.8	T	
			4			0.4	0.6	0.7	1	1.7	3.1	7	
	15	6			0.4	0.5	0.7	1	1.5	2.6			
		8				0.4	0.6	0.7	1	1.4			
		10				0.4	0.6	0.7	1	1.4			
		13					0.5	0.7	0.9	1.3			
		16						0.7	0.9	1.3			
		20							0.9	1.3			
		25							0.9	1.3			

L.	Char.	E.		S800S								
		I _{cu} [kA]	I _n [A]	B								
				50								
S200P	K	25	0.2	T	T	T	T	T	T	T	T	T
			0.3	T	T	T	T	T	T	T	T	T
			0.5	T	T	T	T	T	T	T	T	T
			0.75	T	T	T	T	T	T	T	T	T
			1	0.8	5	T	T	T	T	T	T	
			1.6	0.5	1	2.3	T	T	T	T	T	
	15	2	0.3	0.5	0.7	2.1	T	T	T	T		
		3		0.4	0.5	0.7	1.2	2.5	8.6	T		
		4		0.4	0.4	0.7	1	1.7	3	7.7		
		6				0.6	0.8	1.2	2	3.6		
		8					0.7	0.9	1.3	2		
		10						0.9	1.3	2		
		13							1	1.5		

L.	Char.	E.		S800S								
		I _{cu} [kA]	I _n [A]	C								
				50								
S200P	K	25	0.2	T	T	T	T	T	T	T	T	T
			0.3	T	T	T	T	T	T	T	T	T
			0.5	T	T	T	T	T	T	T	T	T
			0.75	T	T	T	T	T	T	T	T	T
			1	0.8	5	T	T	T	T	T	T	
			1.6	0.5	1	2.3	T	T	T	T	T	
	15	2	0.3	0.5	0.7	2.3	T	T	T	T		
		3		0.4	0.5	0.7	1.2	2.5	8.6	T		
		4		0.4	0.4	0.7	1	1.7	3	7.7		
		6				0.6	0.8	1.2	2	3.6		
		8					0.7	0.9	1.3	2		
		10						0.9	1.3	2		
		13							1	1.5		

LEGEND

E. = supply side
L. = load side
Back-up limit values are specified in kA

Technical data

Selectivity

S800S - S200P @ 230/400 V

Miniature
circuit breakers
S800

		E.		S800S							
L.	Char.	I _{cu} [kA]	D								
			50								
			I _n [A]	25	32	40	50	63	80	100	125
S200P	B	25	6	0.5	1	1.2	2	2.8	9.9	21.3	T
			10	0.4	0.6	0.8	1.1	1.4	2.8	3.9	7.4
			13	0.4	0.6	0.8	1.1	1.4	2.5	3.3	5.6
			16		0.6	0.8	1.1	1.4	2.5	3.3	5.6
			20			0.8	1.1	1.3	2.3	3	4.7
			25			0.8	1.1	1.3	2.3	3	4.7
			32				0.9	1.1	1.9	2.4	3.7
	15	40					1.1	1.9	2.4	3.7	
		50						1.5	1.9	2.3	
		63							1.7	2.3	

		E.		S800S							
L.	Char.	I _{cu} [kA]	D								
			50								
			I _n [A]	25	32	40	50	63	80	100	125
S200P	C	25	0.5	T	T	T	T	T	T	T	T
			1	T	T	T	T	T	T	T	T
			1.6	T	T	T	T	T	T	T	T
			2	T	T	T	T	T	T	T	T
			3	0.7	2.2	4.4	T	T	T	T	T
			4	0.7	1.3	2.2	4.4	7.7	T	T	T
			6	0.5	1	1.2	2	2.8	9.9	22	T
			8	0.4	0.6	0.8	1.1	1.4	2.8	3.9	7.4
			10	0.4	0.6	0.8	1.1	1.4	2.8	3.9	7.4
			13	0.4	0.6	0.8	1.1	1.4	2.5	3.3	5.6
			16		0.6	0.8	1.1	1.4	2.5	3.3	5.6
			20			0.8	1.1	1.3	2.3	3	4.7
			25			0.8	1.1	1.3	2.3	3	4.7
			15	32				0.9	1.1	1.9	2.4
	40						1.1	1.9	2.4	3.7	
	50							1.5	1.9	2.3	
	63								1.7	2.3	

		E.		S800S							
L.	Char.	I _{cu} [kA]	D								
			50								
			I _n [A]	25	32	40	50	63	80	100	125
S200P	K	25	0.2	T	T	T	T	T	T	T	T
			0.3	T	T	T	T	T	T	T	T
			0.5	T	T	T	T	T	T	T	T
			0.75	T	T	T	T	T	T	T	T
			1	T	T	T	T	T	T	T	T
			1.6	T	T	T	T	T	T	T	T
			2	2.3	T	T	T	T	T	T	T
			3	0.7	1.3	4.4	T	T	T	T	T
			4	0.7	1	2.2	4.4	7.7	T	T	T
			6	0.6	0.8	1.5	2.5	3.6	12.1	24.2	T
			8	0.5	0.7	1.1	1.5	2	4	5.5	9.9
			10	0.5	0.7	1.1	1.5	2	4	5.5	9.9
			13		0.6	0.9	1.2	1.5	2.6	3.4	5.2
			16			0.9	1.2	1.5	2.6	3.4	5.2
	20				0.9	1.1	1.8	2.2	3.2		
	25						1.8	2.2	3.2		
	15	32						1.7	2	2.9	
		40							1.9	2.6	
		50								2.2	
		63									

LEGEND

E. = supply side
L. = load side
Back-up limit values are specified in kA

Technical data

Selectivity

S800S - S280 @ 230/400 V

		E.		S800S							
L.		Char.		B, C, D, K							
		I _{cu} [kA]		50							
		I _n [A]		25	32	40	50	63	80	100	125
S280	B	10	6	50	50	50	50	50	50	50	50
			10	50	50	50	25	20	16	16	16
		25	13	50	50	50	25	20	16	16	16
			16	50	50	50	25	20	16	16	16
			20		50	50	25	20	16	16	16
			25			50	25	20	16	16	16
		15	32				25	20	16	16	16
			40					20	16	16	16
		10	50						16	16	16
			63							16	16

		E.		S800S								
L.		Char.		B, C, D, K								
		I _{cu} [kA]		50								
		I _n [A]		25	32	40	50	63	80	100	125	
S400E	B	6	6	50	50	50	50	50	50	50	50	
			10	50	50	50	50	50	50	50	50	
			13	50	50	50	50	50	50	50	50	
			16	50	50	50	50	50	50	50	50	
			20		50	50	50	50	50	50	50	
			25			50	50	50	50	50	50	
			32				50	50	50	50	50	
			40						50	50	50	50
			50							50	50	50
			63								50	50

		E.		S800S							
L.		Char.		B, C, D, K							
		I _{cu} [kA]		50							
		I _n [A]		25	32	40	50	63	80	100	125
S280	C	10	3	50	50	50	50	50	50	50	50
			4	50	50	50	50	50	50	50	50
			6	50	50	50	50	50	50	50	50
			8	50	50	50	25	20	16	16	16
		25	10	50	50	50	25	20	16	16	16
			13	50	50	50	25	20	16	16	16
			16	50	50	50	25	20	16	16	16
			20		50	50	25	20	16	16	16
		15	25			50	25	20	16	16	16
			32				25	20	16	16	16
10	40					20	16	16	16		
	50						16	16	16		
63								16	16		

		E.		S800S							
L.		Char.		B, C, D, K							
		I _{cu} [kA]		50							
		I _n [A]		25	32	40	50	63	80	100	125
S400E	C	6	0.5...6	50	50	50	50	50	50	50	50
			8	50	50	50	50	50	50	50	50
			10	50	50	50	50	50	50	50	50
			13	50	50	50	50	50	50	50	50
			16	50	50	50	50	50	50	50	50
			20		50	50	50	50	50	50	50
			25			50	50	50	50	50	50
			32				50	50	50	50	50
			40					50	50	50	50
			50						50	50	50
63								50	50		

		E.		S800S							
L.		Char.		B, C, D, K							
		I _{cu} [kA]		50							
		I _n [A]		25	32	40	50	63	80	100	125
S280	K, Z	10	3	50	50	50	50	50	50	50	50
			4	50	50	50	50	50	50	50	50
			6	50	50	50	50	50	50	50	50
			8	50	50	50	25	20	16	16	16
		25	10	50	50	50	25	20	16	16	16
			13	50	50	50	25	20	16	16	16
			16	50	50	50	25	20	16	16	16
			20		50	50	25	20	16	16	16
		15	25			50	25	20	16	16	16
			32				25	20	16	16	16
10	40					20	16	16	16		
	50						16	16	16		
63								16	16		


LEGEND

E. = supply side
L. = load side
Back-up limit values are specified in kA


Approximate dimensions
S800U & S800S
UL & IEC

Dimension drawings in mm


S800S & S800U

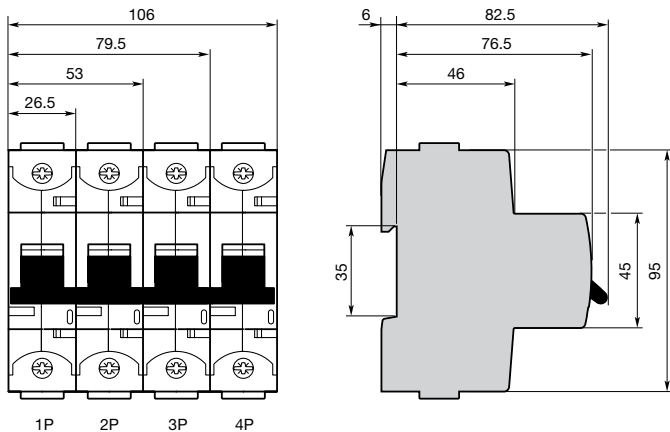


S800-SOR & S800-UVR

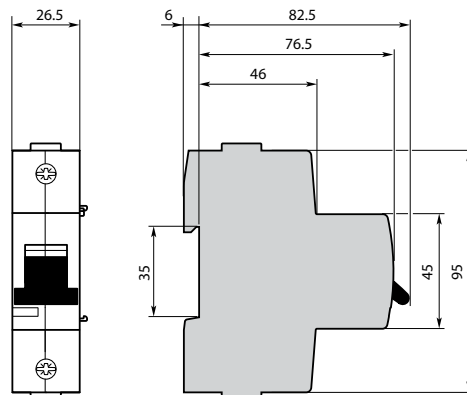

S800-AUX

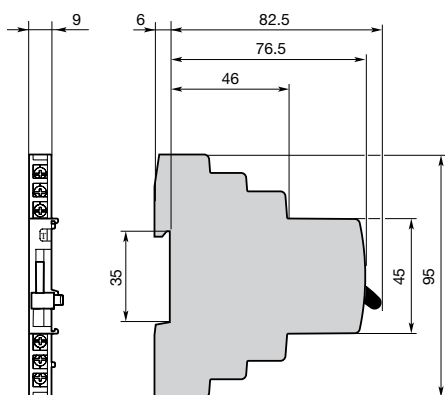

S800-AUX/ALT

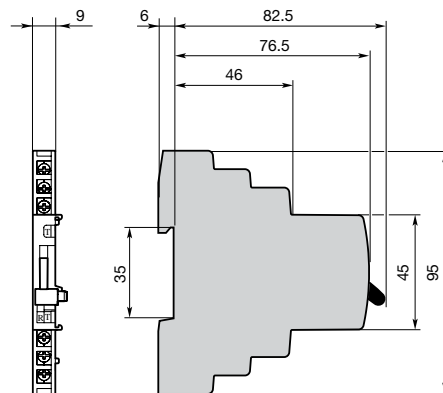

S800-RD & S800-RHE

