


ARMTI-3

Solution Water Applications



- 2-1/2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- High Watt Density (46 - 53 W/In²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Three Phase
- General Purpose Terminal Enclosure

E1 — Dimensions (Inches)

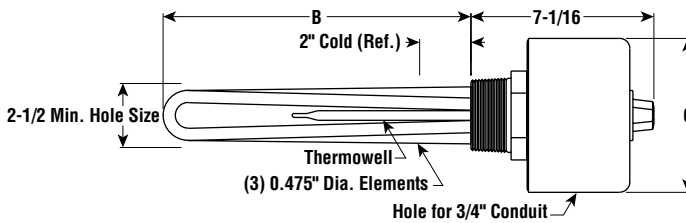

SCREW PLUG

FASTShip

Same-day shipping on stock item orders received before 4 pm CST.
3-day shipping on assembly-stock items.

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose¹												
3	240	3	51	3	7	8	ARMTI-3305T2	AS	188787	ARMTI-3305T1	AS	188795
3	480	3	51	3	7	8	ARMTI-3305T2	AS	188824	ARMTI-3305T1	AS	188832
4.5	240	3	48	3	11	8	ARMTI-3455T2	AS	188867	ARMTI-3455T1	AS	188875
4.5	480	3	48	3	11	8	ARMTI-3455T2	AS	188904	ARMTI-3455T1	AS	188912
6	240	3	48	3	17-3/8	9	ARMTI-3605T2	AS	188947	ARMTI-3605T1	AS	188955
6	480	3	48	3	17-3/8	9	ARMTI-3605T2	AS	188980	ARMTI-3605T1	AS	188998
7.5	240	3	53	3	19	10	ARMTI-3755T2	AS	189026	ARMTI-3755T1	AS	189034
7.5	480	3	53	3	19	10	ARMTI-3755T2	AS	189069	ARMTI-3755T1	AS	189077
9	240	3	47	3	24-3/8	10	ARMTI-3905T2	AS	189106	ARMTI-3905T1	AS	189114
9	480	3	47	3	24-3/8	10	ARMTI-3905T2	AS	189149	ARMTI-3905T1	AS	189157
12	240	3	46	3	32-1/4	11	ARMTI-3120T2	AS	189181	ARMTI-3120T1	AS	189190
12	480	3	46	3	32-1/4	11	ARMTI-3120T2	AS	189229	ARMTI-3120T1	AS	189237
15	240	3	46	3	39-7/8	12	ARMTI-3150T2	AS	189261	ARMTI-3150T1	AS	189270
15	480	3	46	3	39-7/8	12	ARMTI-3150T2	AS	189309	ARMTI-3150T1	AS	189317
18	240	3	51	3	47-3/8	13	ARMTI-3180T2	AS	189341	ARMTI-3180T1	AS	189350
18	480	3	51	3	47-3/8	13	ARMTI-3180T2	AS	189384	ARMTI-3180T1	AS	189392


ARMTI-3

Solution Water Applications *(cont'd.)*



- 2-1/2" NPT Stainless Steel Screw Plug
- INCOLOY® Sheath Elements
- High Watt Density (46 - 53 W/In²)
- 3 - 18 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Three Phase
- Moisture Resistant/Explosion Resistant Terminal Enclosure

E2 — Dimensions (Inches)

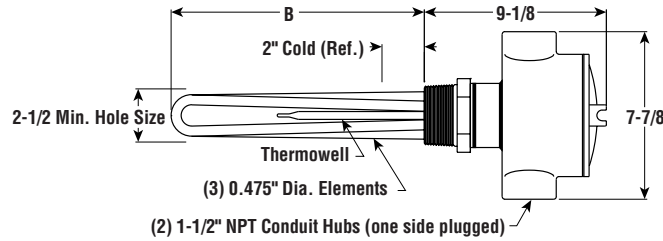

FASTShip

Same-day shipping on stock item orders received before 4 pm CST.
3-day shipping on assembly-stock items.

Specifications and Ordering Information

							T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN
E2 Moisture Resistant/Explosion Resistant²												
3	240	3	51	3	7	13	ARMTI-3305E2T2	AS	188808	ARMTI-3305E2T1	AS	188816
3	480	3	51	3	7	13	ARMTI-3305E2T2	NS	188840	ARMTI-3305E2T1	NS	188859
4.5	240	3	48	3	11	13	ARMTI-3455E2T2	AS	188883	ARMTI-3455E2T1	AS	188891
4.5	480	3	48	3	11	13	ARMTI-3455E2T2	AS	188920	ARMTI-3455E2T1	AS	188939
6	240	3	48	3	17-3/8	14	ARMTI-3605E2T2	AS	188963	ARMTI-3605E2T1	AS	188971
6	480	3	48	3	17-3/8	14	ARMTI-3605E2T2	AS	189000	ARMTI-3605E2T1	AS	189018
7.5	240	3	53	3	19	15	ARMTI-3755E2T2	AS	189042	ARMTI-3755E2T1	AS	189050
7.5	480	3	53	3	19	15	ARMTI-3755E2T2	AS	189085	ARMTI-3755E2T1	AS	189093
9	240	3	47	3	24-3/8	15	ARMTI-3905E2T2	AS	189122	ARMTI-3905E2T1	AS	189130
9	480	3	47	3	24-3/8	15	ARMTI-3905E2T2	AS	189165	ARMTI-3905E2T1	AS	189173
12	240	3	46	3	32-1/4	16	ARMTI-3120E2T2	AS	189202	ARMTI-3120E2T1	AS	189210
12	480	3	46	3	32-1/4	16	ARMTI-3120E2T2	AS	189245	ARMTI-3120E2T1	AS	189253
15	240	3	46	3	39-7/8	17	ARMTI-3150E2T2	AS	189288	ARMTI-3150E2T1	AS	189296
15	480	3	46	3	39-7/8	17	ARMTI-3150E2T2	AS	189325	ARMTI-3150E2T1	AS	189333
18	240	3	51	3	47-3/8	18	ARMTI-3180E2T2	AS	189368	ARMTI-3180E2T1	AS	189376
18	480	3	51	3	47-3/8	18	ARMTI-3180E2T2	AS	189405	ARMTI-3180E2T1	AS	189413

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified.