


ARMTO-2

Medium Weight Oil Applications


- 2" NPT Steel Screw Plug
- Steel Sheath Elements
- 15 W/in²
- 2 - 6 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Single Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure



E1 — Dimensions (Inches)

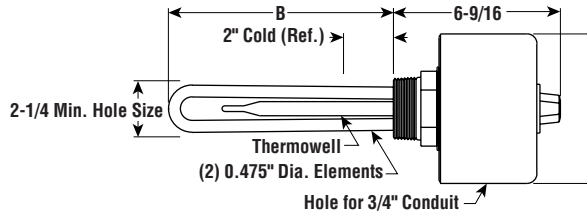

E2 — Dimensions (Inches)

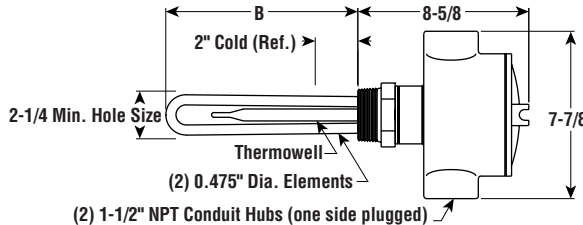

FASTSHIP

Same-day shipping on stock item orders received before 4 pm CST.
3-day shipping on assembly-stock items.

Specifications and Ordering Information

| | | | | | | | | T3 — Temperature (200 - 550°F) | | | T2 — Temperature (60 - 250°F) | | | T1 — Temperature (0 - 100°F) | | |
|--|-------|-------|-------------------|-----------|-------------|------------|----------------|--------------------------------|--------|----------------|-------------------------------|--------|----------------|------------------------------|--------|--|
| kW | Volts | Phase | W/in ² | No. Elem. | DIM B (In.) | Wt. (Lbs.) | Model | Stock | PCN | Model | Stock | PCN | Model | Stock | PCN | |
| E1 General Purpose¹ | | | | | | | | | | | | | | | | |
| 2 | 240 | 1 | 15 | 2 | 24-7/8 | 8 | ARMTO-2020T3 | AS | 324208 | ARMTO-2020T2 | AS | 324216 | ARMTO-2020T1 | AS | 324224 | |
| 2 | 480 | 1 | 15 | 2 | 24-7/8 | 8 | ARMTO-2020T3 | AS | 324267 | ARMTO-2020T2 | AS | 324275 | ARMTO-2020T1 | AS | 324283 | |
| 2.66 | 240 | 1 | 15 | 2 | 32-3/4 | 9 | ARMTO-2026T3 | AS | 324320 | ARMTO-2026T2 | AS | 324339 | ARMTO-2026T1 | AS | 324347 | |
| 2.66 | 480 | 1 | 15 | 2 | 32-3/4 | 9 | ARMTO-2026T3 | AS | 324380 | ARMTO-2026T2 | AS | 324398 | ARMTO-2026T1 | AS | 324400 | |
| 3.33 | 240 | 1 | 15 | 2 | 40-1/4 | 9 | ARMTO-2033T3 | AS | 324443 | ARMTO-2033T2 | AS | 324451 | ARMTO-2033T1 | AS | 324460 | |
| 3.33 | 480 | 1 | 15 | 2 | 40-1/4 | 9 | ARMTO-2033T3 | AS | 324507 | ARMTO-2033T2 | AS | 324515 | ARMTO-2033T1 | AS | 324523 | |
| 4 | 208 | 1 | 15 | 2 | 47-3/4 | 10 | ARMTO-2040T3 | AS | 324566 | ARMTO-2040T2 | AS | 324574 | ARMTO-2040T1 | AS | 324582 | |
| 4 | 240 | 1 | 15 | 2 | 47-3/4 | 10 | ARMTO-2040T3 | AS | 324620 | ARMTO-2040T2 | AS | 324638 | ARMTO-2040T1 | AS | 324646 | |
| 4 | 480 | 1 | 15 | 2 | 47-3/4 | 10 | ARMTO-2040T3 | AS | 324689 | ARMTO-2040T2 | AS | 324697 | ARMTO-2040T1 | AS | 324700 | |
| 5 | 240 | 1 | 15 | 2 | 57-1/2 | 11 | ARMTO-2050T3 | AS | 324742 | ARMTO-2050T2 | AS | 324750 | ARMTO-2050T1 | AS | 324769 | |
| 5 | 480 | 1 | 15 | 2 | 57-1/2 | 11 | ARMTO-2050T3 | AS | 324806 | ARMTO-2050T2 | AS | 324814 | ARMTO-2050T1 | AS | 324822 | |
| 6 | 240 | 1 | 15 | 2 | 67-3/4 | 12 | ARMTO-2060T3 | AS | 324865 | ARMTO-2060T2 | AS | 324873 | ARMTO-2060T1 | AS | 324881 | |
| 6 | 480 | 1 | 15 | 2 | 67-3/4 | 12 | ARMTO-2060T3 | AS | 324929 | ARMTO-2060T2 | AS | 324937 | ARMTO-2060T1 | AS | 324945 | |
| E2 Moisture Resistant/Explosion Resistant² | | | | | | | | | | | | | | | | |
| 2 | 240 | 1 | 15 | 2 | 24-7/8 | 13 | ARMTO-2020E2T3 | AS | 324232 | ARMTO-2020E2T2 | NS | 324240 | ARMTO-2020E2T1 | AS | 324259 | |
| 2 | 480 | 1 | 15 | 2 | 24-7/8 | 13 | ARMTO-2020E2T3 | AS | 324291 | ARMTO-2020E2T2 | AS | 324304 | ARMTO-2020E2T1 | AS | 324312 | |
| 2.66 | 240 | 1 | 15 | 2 | 32-3/4 | 14 | ARMTO-2026E2T3 | AS | 324355 | ARMTO-2026E2T2 | AS | 324363 | ARMTO-2026E2T1 | AS | 324371 | |
| 2.66 | 480 | 1 | 15 | 2 | 32-3/4 | 14 | ARMTO-2026E2T3 | AS | 324419 | ARMTO-2026E2T2 | AS | 324427 | ARMTO-2026E2T1 | AS | 324435 | |
| 3.33 | 240 | 1 | 15 | 2 | 40-1/4 | 14 | ARMTO-2033E2T3 | AS | 324478 | ARMTO-2033E2T2 | AS | 324486 | ARMTO-2033E2T1 | AS | 324494 | |
| 3.33 | 480 | 1 | 15 | 2 | 40-1/4 | 14 | ARMTO-2033E2T3 | AS | 324531 | ARMTO-2033E2T2 | AS | 324540 | ARMTO-2033E2T1 | AS | 324558 | |
| 4 | 208 | 1 | 15 | 2 | 47-3/4 | 15 | ARMTO-2040E2T3 | AS | 324590 | ARMTO-2040E2T2 | AS | 324603 | ARMTO-2040E2T1 | AS | 324611 | |
| 4 | 240 | 1 | 15 | 2 | 47-3/4 | 15 | ARMTO-2040E2T3 | AS | 324654 | ARMTO-2040E2T2 | AS | 324662 | ARMTO-2040E2T1 | AS | 324670 | |
| 4 | 480 | 1 | 15 | 2 | 47-3/4 | 15 | ARMTO-2040E2T3 | AS | 324718 | ARMTO-2040E2T2 | AS | 324726 | ARMTO-2040E2T1 | AS | 324734 | |
| 5 | 240 | 1 | 15 | 2 | 57-1/2 | 16 | ARMTO-2050E2T3 | AS | 324777 | ARMTO-2050E2T2 | AS | 324785 | ARMTO-2050E2T1 | AS | 324793 | |
| 5 | 480 | 1 | 15 | 2 | 57-1/2 | 16 | ARMTO-2050E2T3 | AS | 324830 | ARMTO-2050E2T2 | AS | 324849 | ARMTO-2050E2T1 | AS | 324857 | |
| 6 | 240 | 1 | 15 | 2 | 67-3/4 | 17 | ARMTO-2060E2T3 | AS | 324890 | ARMTO-2060E2T2 | AS | 324902 | ARMTO-2060E2T1 | AS | 324910 | |
| 6 | 480 | 1 | 15 | 2 | 67-3/4 | 17 | ARMTO-2060E2T3 | AS | 324953 | ARMTO-2060E2T2 | AS | 324961 | ARMTO-2060E2T1 | AS | 324970 | |

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed with T1 or T2 Temperature and CSA Certified with T1, T2 or T3 Temperature.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified with T1, T2 or T3 Temperature.