

## ARMTO-3


### Medium Weight Oil Applications




SCREW PLUG

- 2-1/2" NPT Steel Screw Plug
- Steel Sheath Elements
- 15 W/In<sup>2</sup>
- 3 - 9 kW
- Integral Thermostat (DPST)
- 240 and 480 Volt, Three Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure

**E1 — Dimensions (Inches)**

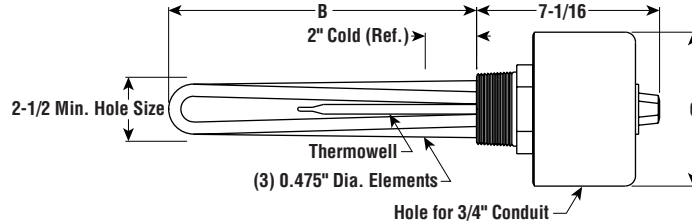

**E2 — Dimensions (Inches)**

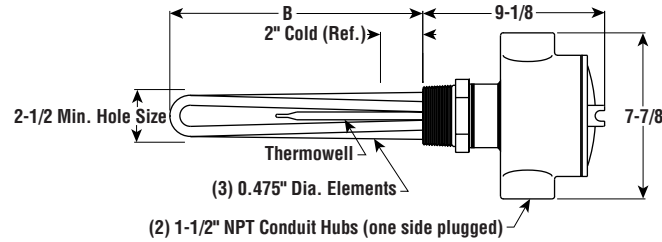

Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.

### Specifications and Ordering Information

							T3 — Temperature (200 - 550°F)			T2 — Temperature (60 - 250°F)			T1 — Temperature (0 - 100°F)		
kW	Volts	Phase	W/In <sup>2</sup>	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN	Model	Stock	PCN
<b>E1 General Purpose<sup>1</sup></b>															
3	240	3	15	3	24-1/2	11	ARMTO-303T3	AS	324988	ARMTO-303T2	AS	324996	ARMTO-303T1	AS	325008
3	480	3	15	3	24-1/2	11	ARMTO-303T3	AS	325040	ARMTO-303T2	AS	325059	ARMTO-303T1	AS	325067
4	240	3	15	3	32-3/8	12	ARMTO-304T3	AS	325104	ARMTO-304T2	AS	325112	ARMTO-304T1	AS	325120
4	480	3	15	3	32-3/8	12	ARMTO-304T3	AS	325163	ARMTO-304T2	AS	325171	ARMTO-304T1	AS	325180
5	240	3	15	3	39-7/8	13	ARMTO-305T3	AS	325227	ARMTO-305T2	AS	325235	ARMTO-305T1	AS	325243
6	240	3	15	3	47-3/8	14	ARMTO-306T3	AS	325286	ARMTO-306T2	AS	325294	ARMTO-306T1	AS	325307
6	480	3	15	3	47-3/8	14	ARMTO-306T3	AS	325340	ARMTO-306T2	AS	325358	ARMTO-306T1	AS	325366
7.5	240	3	15	3	57	15	ARMTO-307T3	AS	325403	ARMTO-307T2	AS	325411	ARMTO-307T1	AS	325420
9	240	3	15	3	67-3/8	16	ARMTO-309T3	AS	325462	ARMTO-309T2	AS	325470	ARMTO-309T1	AS	325489
<b>E2 Moisture Resistant/Explosion Resistant<sup>2</sup></b>															
3	240	3	15	3	24-1/2	16	ARMTO-303E2T3	AS	325016	ARMTO-303E2T2	AS	325024	ARMTO-303E2T1	AS	325032
3	480	3	15	3	24-1/2	16	ARMTO-303E2T3	AS	325075	ARMTO-303E2T2	AS	325083	ARMTO-303E2T1	AS	325091
4	240	3	15	3	32-3/8	17	ARMTO-304E2T3	AS	325139	ARMTO-304E2T2	AS	325147	ARMTO-304E2T1	AS	325155
4	480	3	15	3	32-3/8	17	ARMTO-304E2T3	AS	325198	ARMTO-304E2T2	AS	325200	ARMTO-304E2T1	AS	325219
5	240	3	15	3	39-7/8	18	ARMTO-305E2T3	AS	325251	ARMTO-305E2T2	AS	325260	ARMTO-305E2T1	AS	325278
6	240	3	15	3	47-3/8	19	ARMTO-306E2T3	AS	325315	ARMTO-306E2T2	AS	325323	ARMTO-306E2T1	AS	325331
6	480	3	15	3	47-3/8	19	ARMTO-306E2T3	AS	325374	ARMTO-306E2T2	AS	325382	ARMTO-306E2T1	AS	325390
7.5	240	3	15	3	57	20	ARMTO-307E2T3	AS	325438	ARMTO-307E2T2	AS	325446	ARMTO-307E2T1	AS	325454
9	240	3	15	3	67-3/8	21	ARMTO-309E2T3	AS	325497	ARMTO-309E2T2	AS	325500	ARMTO-309E2T1	AS	325518

**Stock Status:** S = stock AS = assembly stock NS = non-stock  
**To Order**—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed with T1 or T2 Temperature and CSA Certified with T1, T2 or T3 Temperature.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified with T1, T2 or T3 Temperature.