

ARTMO-1


Light Weight Oil Applications




- 1" NPT Steel Screw Plug
- Steel Sheath Element
- 20 W/In²
- 0.25 - 1.5 kW
- Integral Thermostat (SPST)
- 120 and 240 Volt, Single Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure



E1 — Dimensions (Inches)

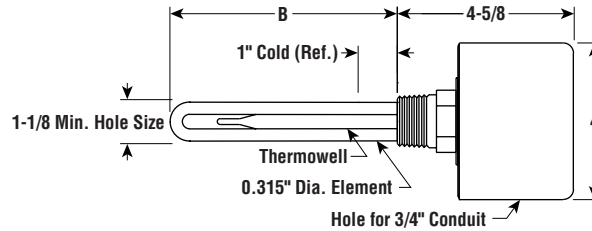

E2 — Dimensions (Inches)

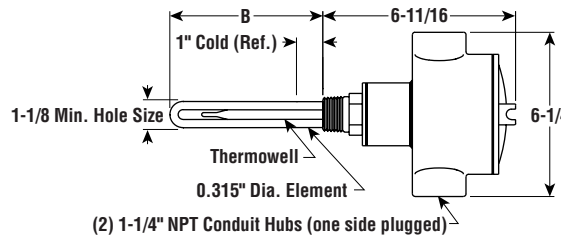

FASTShip

Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.

Specifications and Ordering Information

							T4 — Temperature (60 - 187°F)			T5 — Temperature (60 - 240°F)			T8 — Temperature (0 - 127°F)		
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Wt. (Lbs.)	Model	Stock	PCN	Model	Stock	PCN	Model	Stock	PCN
E1 General Purpose¹															
0.25	120	1	20	1	6-1/2	2	ARTMO-250T4	S	292883	ARTMO-250T5	AS	319003	ARTMO-250T8	AS	319011
0.375	120	1	20	1	9-1/2	3	ARTMO-375T4	S	292891	ARTMO-375T5	AS	319046	ARTMO-375T8	AS	319054
0.375	240	1	20	1	9-1/2	3	ARTMO-375T4	AS	292912	ARTMO-375T5	AS	319089	ARTMO-375T8	AS	319097
0.5	120	1	20	1	12-1/2	3	ARTMO-500T4	S	292904	ARTMO-500T5	AS	319126	ARTMO-500T8	S	319134
0.5	240	1	20	1	12-1/2	3	ARTMO-500T4	AS	292980	ARTMO-500T5	AS	319169	ARTMO-500T8	S	319177
1	120	1	20	1	25	3	ARTMO-1000T4	AS	038703	ARTMO-1000T5	AS	038746	ARTMO-1000T8	AS	038789
1	240	1	20	1	25	3	ARTMO-1000T4	AS	038711	ARTMO-1000T5	AS	038754	ARTMO-1000T8	AS	038797
1.5	120	1	20	1	38	4	ARTMO-1500T4	AS	038720	ARTMO-1500T5	AS	038762	ARTMO-1500T8	AS	038800
1.5	240	1	20	1	38	4	ARTMO-1500T4	AS	038738	ARTMO-1500T5	AS	038770	ARTMO-1500T8	AS	038818
E2 Moisture Resistant/Explosion Resistant²															
0.25	120	1	20	1	6-1/2	5	ARTMO-250E2T4	S	292963	ARTMO-250E2T5	AS	319020	ARTMO-250E2T8	AS	319038
0.375	120	1	20	1	9-1/2	5	ARTMO-375E2T4	AS	292939	ARTMO-375E2T5	AS	319062	ARTMO-375E2T8	AS	319070
0.375	240	1	20	1	9-1/2	5	ARTMO-375E2T4	AS	292920	ARTMO-375E2T5	AS	319100	ARTMO-375E2T8	AS	319118
0.5	120	1	20	1	12-1/2	5	ARTMO-500E2T4	S	292971	ARTMO-500E2T5	AS	319142	ARTMO-500E2T8	AS	319150
0.5	240	1	20	1	12-1/2	5	ARTMO-500E2T4	AS	292998	ARTMO-500E2T5	AS	319185	ARTMO-500E2T8	AS	319193
1	120	1	20	1	25	6	ARTMO-1000E2T4	AS	038826	ARTMO-1000E2T5	AS	038869	ARTMO-1000E2T8	AS	038906
1	240	1	20	1	25	6	ARTMO-1000E2T4	AS	038834	ARTMO-1000E2T5	AS	038877	ARTMO-1000E2T8	AS	038914
1.5	120	1	20	1	38	7	ARTMO-1500E2T4	AS	038842	ARTMO-1500E2T5	AS	038885	ARTMO-1500E2T8	AS	038922
1.5	240	1	20	1	38	7	ARTMO-1500E2T4	AS	038850	ARTMO-1500E2T5	AS	038893	ARTMO-1500E2T8	AS	038930

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified.