

Panasonic

Fiber Sensor Guide Book



GENERAL TERMS AND CONDITIONS

Please read this document carefully with respect to our product warranty policy before using our Panasonic Industrial Devices SUNX products ("Products"). If you have any questions or comments regarding do's and don'ts of the Products, please consult your local Panasonic Industrial Devices SUNX authorized dealer for the correct use and application of the Products.

1. PRODUCT MODIFICATION & DISCONTINUANCE:

Panasonic Industrial Devices SUNX expressly reserves the right to modify, including the right to discontinue, any of the Products, prior to their order, from time to time without notice.

2. WARRANTIES:

- (1) Subject to the exclusions stated in 3 (EXCLUSIONS) herein below, Panasonic Industrial Devices SUNX warrants the Products to be free of defects in material and workmanship for a period of one (1) year from the date of shipment under normal usage in environments commonly found in manufacturing industry.
- (2) Any Products found to be defective must be shipped to Panasonic Industrial Devices SUNX with all shipping costs paid by Purchaser or offered to Panasonic Industrial Devices SUNX for inspection and examination. Upon examination by Panasonic Industrial Devices SUNX, Panasonic Industrial Devices SUNX will, at its sole discretion, repair or replace at no charge, or refund the purchase price of, any Products found to be defective.

3. EXCLUSIONS

- (1) This warranty does not apply to defects resulting from any cause:
 - (i) which was due to abuse, misuse, mishandling, improper installation, improper interfacing, or improper repair by Purchaser;
 - (ii) which was due to unauthorized modification by Purchaser, in part or in whole, whether in structure, performance or specification;
 - (iii) which was not discoverable by a person with the state-of-the-art scientific and technical knowledge at the time of manufacture;
 - (iv) which was due to an operation or use by Purchaser outside of the limits of operation or environment specified by Panasonic Industrial Devices SUNX;
 - (v) which was due to Force Majeure; and
 - (vi) which was due to any use or application expressly discouraged by Panasonic Industrial Devices SUNX in 5 (CAUTIONS FOR SAFE USE) hereunder.
- (2) This warranty extends only to the first purchaser for application, and is not transferable to any person or entity which purchased from such purchaser for application.
- (3) The performance data presented in this catalogue is only for guidance and shall not constitute any performance warranty by Panasonic Industrial Devices SUNX.

4. DISCLAIMERS

- (1) Panasonic Industrial Devices SUNX's sole obligation and liability under this warranty is limited to the repair or replacement, or refund of the purchase price, of a defective Product, at Panasonic Industrial Devices SUNX's option.
- (2) THE REPAIR, REPLACEMENT, OR REFUND IS THE EXCLUSIVE REMEDY OF THE PURCHASER, AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF PROPRIETARY RIGHTS, ARE HEREBY EXPRESSLY DISCLAIMED. IN NO EVENT SHALL PANASONIC INDUSTRIAL DEVICES SUNX AND ITS AFFILIATED ENTITIES BE LIABLE FOR DAMAGES IN EXCESS OF THE PURCHASE PRICE OF THE PRODUCTS, OR FOR ANY INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES OF ANY KIND, OR ANY DAMAGES RESULTING FROM LOSS OF USE, BUSINESS INTERRUPTION, LOSS OF INFORMATION, LOSS OR INACCURACY OF DATA, LOSS OF PROFITS, LOSS OF SAVINGS, THE COST OF PROCUREMENT OF SUBSTITUTED GOODS, SERVICES OR TECHNOLOGIES, OR FOR ANY MATTER ARISING OUT OF OR IN CONNECTION WITH THE USE OR INABILITY TO USE THE PRODUCTS.

5. CAUTIONS FOR SAFE USE

- (1) The applications shown in this catalogue are only suggestions, and it is Purchaser's sole responsibility to ascertain the fitness and suitability of the Products for any particular application, as well as to abide by Purchaser's applicable local laws and regulations, if any.
- (2) Never use the Products NOT rated or designated as "SAFETY SENSOR" in any application involving risk to life or property. When such a use is made by Purchaser, such Purchaser shall indemnify and hold harmless Panasonic Industrial Devices SUNX from any liability or damage whatsoever arising out of or in relation to such use.
- (3) In incorporating the Products to any equipment, facilities or systems, it is highly recommended to employ fail-safe designs, including but not limited to a redundant design, flame propagation prevention design, and malfunction prevention design so as not to cause any risk of bodily injury, fire accident, or social damage due to any failure of such equipment, facilities or systems.
- (4) The Products are each intended for use only in environments commonly found in manufacturing industry, and, unless expressly allowed in this catalogue, specification or otherwise, shall not be used in, or incorporated into, any equipment, facilities or systems, such as those:
 - (a) which are used for the protection of human life or body parts;
 - (b) which are used outdoors or in environments subject to any likelihood of chemical contamination or electromagnetic influence;
 - (c) which are likely to be used beyond the limits of operations or environments specified by Panasonic Industrial Devices SUNX in this catalogue or otherwise;
 - (d) which may cause risk to life or property, such as nuclear energy control equipment, transportation equipment (whether on rail or land, or in air or at sea), and medical equipment;
 - (e) which are operated continuously each day for 24 hours; and
 - (f) which otherwise require a high level of safety performance similar to that required in those equipment, facilities or systems as listed in (a) through (e) above.

6. EXPORT CONTROL LAWS

In some jurisdictions, the Products may be subject to local export laws and regulations. If any diversion or re-export is to be made, Purchaser is advised to abide by such local export laws and regulations, if any, at its own responsibility.

7. PURCHASER'S TRASFER OBLIGATIONS

If Purchaser resell or deliver the Products to a third party, Purchaser must provide such third party with a copy of this document, all specifications, manuals, catalogs, leaflets and written information of any kind provided to Purchaser by Panasonic Industrial Devices SUNX or its authorized local representative from time to time regarding the Products.

INDEX

| | | |
|--------------------------------|--------------------------------|-----|
| ■ Fiber Selection Guide | Choose by model | 2 |
| | Choose by shape/application | 3 |
| | How to read Model No. | 4 |
| | Earlier model comparison table | 6 |
| ■ New Product Introduction | Tough Fiber | 8 |
| ■ Fibers | Super Quality | 10 |
| | Threaded Type | 12 |
| | Square Head Type | 14 |
| | Cylindrical Type | 16 |
| | Sleeve | 18 |
| | Flat Type | 20 |
| | Small Spot | 22 |
| | Narrow Beam | 24 |
| | Wide Beam | 25 |
| | Convergent Reflective Type | 26 |
| | Retroreflective Type | 27 |
| | Chemical / Oil-resistant | 28 |
| | Heat-resistant | 30 |
| | Vacuum-resistant | 32 |
| Liquid Leak / Liquid Detection | 34 | |
| ■ Fiber Options | | 42 |
| ■ Semi-custom Fibers | | 46 |
| ■ Fiber Dimensions | Thru-beam Type | 48 |
| | Retroreflective Type | 55 |
| | Reflective Type | 56 |
| | Others | 66 |
| ■ Amplifiers | FX-500 series Ver.2 | 70 |
| | FX-100 series | 98 |
| ■ INDEX | | 112 |

Fiber Selection Guide

Choose by model

Thru-beam type

| Model No. | Page | |
|---------------|------------------------------|------------|
| | Sensing range Specifications | Dimensions |
| FT-140 | P.12 | P.48 |
| FT-30 | P.11 | |
| FT-31 | P.12 | |
| FT-31S | P.19 | |
| FT-31W | P.12 | |
| FT-40 | P.11 | |
| FT-42 | P.12 | |
| FT-42S | P.19 | |
| FT-42W | P.12 | |
| FT-43 | | |
| FT-45X | P.25 | |
| FT-A11 | | |
| FT-A11W | | |
| FT-A32 | | |
| FT-A32W | | |
| FT-AL05 | P.49 | |
| FT-E13 | | |
| FT-E23 | P.16/P.19 | |
| FT-F93 | P.35 | |
| FT-H13-FM2 | P.50 | |
| FT-H20-J20-S | | |
| FT-H20-J30-S | | |
| FT-H20-J50-S | | |
| FT-H20-M1 | | |
| FT-H20-VJ50-S | | |
| FT-H20-VJ80-S | | |
| FT-H20W-M1 | | |
| FT-H30-M1V-S | | P.32 |
| FT-H35-M2 | | P.30 |
| FT-H35-M2S6 | P.51 | |
| FT-HL80Y | | P.29 |
| FT-KS40 | | P.24 |
| FT-KV26 | | |
| FT-KV40 | | |
| FT-KV40W | | |
| FT-L80Y | | P.29 |
| FT-R31 | | P.15 |
| FT-R40 | | P.12 |
| FT-R41W | | P.15 |
| FT-R42W | | |
| FT-R43 | | |
| FT-R44Y | P.15/P.29 | |
| FT-R60Y | | |
| FT-S11 | P.16 | |
| FT-S20 | P.11 | |
| FT-S21 | P.52 | |
| FT-S21W | | |
| FT-S30 | | P.11 |
| FT-S31W | | P.16 |
| FT-S32 | P.19 | |
| FT-V23 | | |
| FT-V24W | | |
| FT-V25 | | |
| FT-V30 | | |
| FT-V40 | P.16 | |
| FT-V80Y | P.29 | |
| FT-Z20HBW | P.20 | |
| FT-Z20W | | |

Retroreflective type

| Model No. | Page | |
|-----------|------------------------------|------------|
| | Sensing range Specifications | Dimensions |
| FR-KZ22E | P.24/P.27 | P.55 |
| FR-KZ50E | | |
| FR-KZ50H | | |
| FR-Z50HW | | |

| Model No. | Page | |
|-----------|------------------------------|------------|
| | Sensing range Specifications | Dimensions |
| FT-Z30 | P.20 | P.53 |
| FT-Z30E | | |
| FT-Z30EW | | |
| FT-Z30H | | |
| FT-Z30HW | | |
| FT-Z30W | | |
| FT-Z40HBW | | |
| FT-Z40W | | |
| FT-Z802Y | | P.29 |

Reflective type

| Model No. | Page | |
|------------|------------------------------|------------|
| | Sensing range Specifications | Dimensions |
| FD-30 | P.11 | P.56 |
| FD-31 | P.13 | |
| FD-31W | P.13/P.23 | |
| FD-32G | | |
| FD-32GX | | |
| FD-40 | P.11 | |
| FD-41 | P.13 | |
| FD-41S | P.19 | |
| FD-41SW | P.13/P.23 | |
| FD-41W | | |
| FD-42G | P.57 | |
| FD-42GW | | |
| FD-60 | | P.11 |
| FD-61 | | P.13 |
| FD-61G | P.19 | |
| FD-61S | | |
| FD-61W | P.13 | |
| FD-62 | | |
| FD-64X | P.25 | |
| FD-A16 | | |
| FD-AL11 | P.17/P.19 | |
| FD-E13 | | |
| FD-E23 | P.13/P.23 | |
| FD-EG30 | | |
| FD-EG30S | P.19 | |
| FD-EG31 | | |
| FD-F4 | P.59 | |
| FD-F41 | | |
| FD-F41Y | | |
| FD-F71 | | |
| FD-F8Y | | |
| FD-FA93 | | |
| FD-H13-FM2 | | P.31 |
| FD-H18-L31 | | |
| FD-H20-21 | | |
| FD-H20-M1 | | |
| FD-H25-L43 | | |
| FD-H25-L45 | | |

| Model No. | Page | |
|---------------|------------------------------|------------|
| | Sensing range Specifications | Dimensions |
| FD-H30-KZ1V-S | P.32 | P.61 |
| FD-H30-L32 | P.31 | |
| FD-H30-L32V-S | P.32 | |
| FD-H35-20S | P.31 | P.62 |
| FD-H35-M2 | | |
| FD-H35-M2S6 | P.35 | |
| FD-HF40Y | P.26 | |
| FD-L10 | | |
| FD-L11 | | |
| FD-L12W | | |
| FD-L20H | | |
| FD-L21 | | |
| FD-L21W | | |
| FD-L22A | | |
| FD-L23 | | |
| FD-L30A | | |
| FD-L31A | P.15/P.23 | P.63 |
| FD-L32H | | |
| FD-R31G | | |
| FD-R32EG | | |
| FD-R33EG | | |
| FD-R34EG | | |
| FD-R41 | P.15 | |
| FD-R60 | P.13 | |
| FD-R61Y | P.15/P.29 | |
| FD-S21 | P.17 | |
| FD-S30 | P.11 | |
| FD-S31 | P.17 | P.64 |
| FD-S32 | | |
| FD-S32W | | |
| FD-S33GW | | |
| FD-S60Y | | |
| FD-V30 | P.19 | |
| FD-V30W | | |
| FD-V50 | | |
| FD-Z20HBW | P.21 | P.65 |
| FD-Z20W | | |
| FD-Z40HBW | | |
| FD-Z40W | | |
| FD-Z50HW | | |

Fiber Selection Guide

Choose by shape

Threaded Type


- Standard type which is mounted using nuts.



P.12

Square Head Type


- Installed cleanly on the side of a conveyor belt.



P.14

Cylindrical Type


- Has a slender shape that is mounted using set screws.



P.16

Sleeve

- Suitable for sensing in narrow locations and sensing minute objects.



P.18

Flat Type

- Thin and rectangular shape. Installed directly in narrow locations with screws.




P.20

Choose by beam shape

Small Spot


- Senses minute objects using a spot lens.



P.22

Narrow Beam


- Not easily affected by surrounding obstacles.



P.24

Wide Beam


- Senses in the beam band without missing a work.



P.25

Convergent Reflective Type


- Senses in the limited range only.



P.26

Retroreflective Type

- Ideal for sensing transparent objects




P.27

Choose by quality

Super Quality


- The variance of beam intensity and beam axis is extremely small.



P.10

Chemical / Oil-resistant

- Various kinds of liquids can be detected due to the fluorine contained resin case



P.28

Heat-resistant

- Withstands at -60 °C -76 °F to 350 °C 662 °F



P.30

Vacuum-resistant

- Usable in high-temperatures of 300 °C 572 °F and vacuum



P.32

Liquid Leak / Liquid Detection

- Corresponds to various liquid events.




P.34

Choose by environment / performance

Fiber sensor amplifiers guidance

Digital fiber sensor FX-500 series Ver. 2


- At the industry's leading edge



P.70

Digital fiber sensor FX-100 series

- Super functionality, yet, economical price



P.98

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options
Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others


Amplifiers
FX-500 series
FX-100 series

INDEX

Fiber Selection Guide

How to read Model No.

Applies to the fiber in (P.10~P.35)

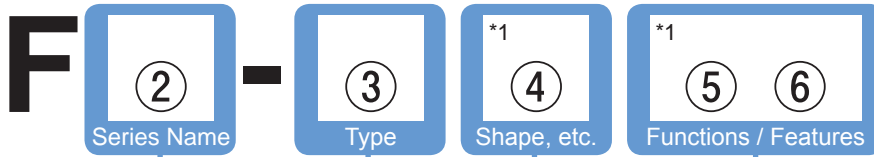

*1: Excluding liquid leak / liquid detection fiber

②

| Symbol | Details |
|--------|----------------------|
| T | Thru-beam type |
| D | Reflective type |
| R | Retroreflective type |

⑤

| Symbol | Details |
|--------|----------------------|
| None | General-purpose |
| G | Coaxial reflective |
| S | Sleeve |
| H | Top sensing * |
| E | Side sensing * |
| HB | Top sensing + Bent * |
| A | Alignment |

*③ is for Flat type (Z and KZ) only

⑥

| Symbol | Details |
|--------|--------------------|
| None | General-purpose |
| W | Sharp bending |
| X | Stainless-jacketed |
| Y | Chemical-resistant |

| ③ | | ④ | |
|--------|--------------------------------|----------|----------------------------------|
| Symbol | Details | Lead No. | Details |
| None | Treaded type | 3 | M3 |
| | | 4 | M4 |
| | | 6 | M6 |
| | | 14 | M14 |
| R | Elbow or square head | 4 | M4 |
| | | 6 | M6 |
| S | Cylindrical type | 1 | ø1 mm |
| | | 2 | ø1.5 mm |
| | | 3 | ø2.5 or ø3 mm |
| KS | Narrow beam | 4 | ø3.7 mm |
| | | 2 | ø2 mm |
| V | Side-view | 3 | ø2.5 or ø3 mm |
| | | 4 | ø4 mm |
| | | 5 | ø5 mm |
| KV | Narrow beam / Side-view | 4 | ø4 mm |
| | | 2 | 1.5 x 2 mm |
| E | Ultra small diameter | 1 | Fiber ø0.125 mm |
| | | 2 | Fiber ø0.25 mm |
| EG | Coaxial | 3 | M3 |
| Z | Flat type | 2 | Thickness 2 mm |
| | | 3 | Thickness 3 mm |
| | | 4 | Thickness 3.5 mm |
| | | 5 | Thickness 5.2 mm |
| | | 2 | Thickness 2.2 mm |
| KZ | Narrow beam | 5 | Thickness 5.2 mm |
| | | 3 | Sensing width 32 mm |
| A | Wide beam | 1 | Sensing width 10 to 19 mm |
| | | 1 | Sensing width 11.1 mm |
| AL | Array | 0 | Sensing width 5.5 mm |
| | | 1 | Sensing range 0 to 10 mm (STD) |
| | | 2 | Sensing range 11 to 30 mm (STD) |
| L | Convergent reflective type | 3 | Sensing range 31mm or more (STD) |
| | | 9 | Mountable on pipe |
| | | 7 | Liquid leak |
| F | Liquid leak / Liquid detection | 9 | Mountable on pipe |
| | | 7 | Liquid leak |

Fiber Selection Guide

Earlier Models Comparison Table (The specification of new fiber may be changed from that of old one. Please confirm the specification before use.)

Thru-beam type

| Old fiber Model No. | New fiber Model No. | Page | |
|---------------------|---------------------|------------------------------|------------|
| | | Sensing range Specifications | Dimensions |
| FT-A30 | FT-A32 | P.25 | P.49 |
| FT-A8 | FT-A11 | | |
| FT-AFM2 | FT-AL05 | | |
| FT-AFM2E | | | |
| FT-B8 | FT-43 | P.12 | P.48 |
| FT-E12 | FT-E13 | P.16/P.19 | P.49 |
| FT-E22 | FT-E23 | | |
| FT-F902 | FT-F93 | P.35 | |
| FT-FM10L | FT-140 | P.12 | P.48 |
| FT-FM2 | FT-42 | | |
| FT-FM2S | FT-42S | P.19 | P.48 |
| FT-FM2S4 | | | |
| FT-K8 | FT-KS40 | P.24 | P.51 |
| FT-KV1 | FT-KV26 | | |
| FT-KV8 | FT-KV40 | | |
| FT-NFM2 | FT-31 | P.12 | |
| FT-NFM2S | FT-31S | P.19 | P.48 |
| FT-NFM2S4 | | | |
| FT-P2 | FT-S21 | P.16 | P.52 |
| FT-P40 | FT-31 | P.12 | P.48 |
| FT-P60 | FT-42 | | |
| FT-P80 | | | |
| FT-P81X | FT-45X | | P.49 |
| FT-PS1 | FT-S11 | P.16 | P.52 |
| FT-R80 | FT-R40 | P.12 | P.51 |
| FT-SFM2 | FT-S32 | P.16 | P.52 |
| FT-SFM2L | | | |
| FT-SFM2SV2 | FT-V30 | P.19 | P.53 |
| FT-SNFM2 | FT-S21 | P.16 | P.52 |
| FT-T80 | FT-42 | P.12 | P.48 |
| FT-V10 | FT-V40 | P.16 | P.53 |
| FT-V22 | FT-V23 | P.19 | P.52 |
| FT-V41 | FT-V25 | | P.53 |
| FT-W4 | FT-31 | P.12 | P.48 |
| | FT-31W | | |
| FT-W8 | FT-42 | | |
| | FT-42W | | |
| FT-WA30 | FT-A32 | P.25 | P.49 |
| | FT-A32W | | |
| FT-WA8 | FT-A11 | | |
| | FT-A11W | | |

| Old fiber Model No. | New fiber Model No. | Page | |
|---------------------|---------------------|------------------------------|------------|
| | | Sensing range Specifications | Dimensions |
| FT-WKV8 | FT-KV40 | P.24 | P.51 |
| | FT-KV40W | | |
| FT-WR80 | FT-R41W | P.15 | P.52 |
| FT-WR80L | FT-R42W | | |
| FT-WS3 | FT-S31W | P.16 | P.52 |
| FT-WS4 | FT-S21 | | |
| | | FT-S21W | |
| FT-WS8 | FT-S31W | P.19 | P.53 |
| FT-WS8L | FT-S32 | | |
| FT-WV42 | FT-V25 | P.20 | P.53 |
| | FT-V24W | | |
| FT-WZ4 | FT-Z20W | P.20 | P.54 |
| FT-WZ4HB | FT-Z20HBW | | |
| FT-WZ7 | FT-Z40W | P.20 | P.53 |
| FT-WZ7HB | FT-Z40HBW | | |
| FT-WZ8 | FT-Z30 | P.20 | P.53 |
| | FT-Z30W | | |
| FT-WZ8E | FT-Z30E | P.20 | P.53 |
| | FT-Z30EW | | |
| FT-WZ8H | FT-Z30H | P.20 | P.54 |
| | FT-Z30HW | | |
| FT-Z8 | FT-Z30 | P.11 | P.53 |
| FT-Z8E | FT-Z30E | | |
| FT-Z8H | FT-Z30H | P.11 | P.54 |
| ————— | FT-30 | | |
| ————— | FT-40 | P.11 | P.48 |
| ————— | FT-S20 | | |
| ————— | FT-S30 | P.15 | P.51 |
| ————— | FT-R31 | | |
| ————— | FT-R43 | | |

Retroreflective type

| Old fiber Model No. | New fiber Model No. | Page | |
|---------------------|---------------------|------------------------------|------------|
| | | Sensing range Specifications | Dimensions |
| FR-KV1 | FR-KZ22E | P.24/P.27 | P.55 |
| FR-KZ21 | FR-KZ50H | | |
| FR-KZ21E | FR-KZ50E | | |
| FR-WKZ11 | FR-Z50HW | | |

Fiber Selection Guide

Reflective type

| Old fiber Model No. | New fiber Model No. | Page | |
|---------------------|---------------------|------------------------------|------------|
| | | Sensing range Specifications | Dimensions |
| FD-A15 | FD-A16 | P.25 | P.58 |
| FD-AFM2 | FD-AL11 | | |
| FD-AFM2E | | | |
| FD-B8 | FD-62 | P.13 | P.57 |
| FD-E12 | FD-E13 | P.17/P.19 | P.58 |
| FD-E22 | FD-E23 | | |
| FD-EG1 | FD-EG30 | P.13/P.23 | P.59 |
| FD-EG2 | FD-EG31 | | |
| FD-EG3 | | | |
| FD-EN500S1 | FD-EG30S | P.19 | P.59 |
| FD-ENM1S1 | | | |
| FD-F705 | FD-F71 | P.35 | P.57 |
| FD-FA90 | FD-FA93 | | |
| FD-FM2 | FD-61 | P.13 | P.57 |
| | FD-61G | | |
| FD-FM2S | FD-61S | P.19 | P.56 |
| FD-FM2S4 | | | |
| FD-G4 | FD-42G | P.13/P.23 | P.62 |
| FD-G6 | FD-32G | | |
| FD-G6X | FD-32GX | | |
| FD-L4 | FD-L20H | P.26 | P.62 |
| FD-L41 | FD-L21 | | |
| FD-L43 | FD-L22A | | |
| FD-L44 | FD-L11 | | |
| FD-L44S | FD-L10 | | |
| FD-L45 | FD-L30A | | |
| FD-L45A | FD-L31A | | |
| FD-L46 | FD-L32H | | |
| FD-L47 | FD-L23 | | |
| FD-L47 | FD-L23 | | |
| FD-NFM2 | FD-41 | P.13 | P.56 |
| FD-NFM2S | FD-41S | P.19 | |
| FD-NFM2S4 | | | |
| FD-P2 | FD-S21 | P.17 | P.63 |
| FD-P40 | FD-31 | P.13 | P.56 |
| FD-P50 | FD-S32 | P.17 | P.64 |
| FD-P60 | FD-41 | P.13 | P.56 |
| FD-P80 | FD-61 | | P.57 |
| FD-P81X | FD-64X | | P.58 |
| FD-R80 | FD-R60 | | P.63 |
| FD-S80 | FD-S32 | P.17 | P.64 |

| Old fiber Model No. | New fiber Model No. | Page | |
|---------------------|---------------------|------------------------------|------------|
| | | Sensing range Specifications | Dimensions |
| FD-SFM2SV2 | FD-V50 | P.19 | P.65 |
| FD-SNFM2 | FD-S31 | P.17 | P.64 |
| FD-T40 | FD-31 | P.13 | P.56 |
| FD-T80 | FD-61 | | P.57 |
| | FD-41 | | P.56 |
| FD-V41 | FD-V30 | P.19 | P.64 |
| FD-W44 | FD-41S | | P.19 |
| | FD-41SW | | |
| FD-W8 | FD-61 | P.13 | P.57 |
| | FD-61W | | |
| FD-WG4 | FD-42G | P.13/P.23 | P.65 |
| | FD-42GW | | |
| FD-WKZ1 | FD-Z50HW | P.24 | P.65 |
| FD-WL41 | FD-L21 | P.26 | P.62 |
| | FD-L21W | | |
| FD-WL48 | FD-L12W | P.17 | P.64 |
| FD-WS8 | FD-S32 | | |
| | FD-S32W | | |
| FD-WSG4 | FD-S33GW | P.13 | P.56 |
| FD-WT4 | FD-31 | | |
| | FD-31W | | |
| FD-WT8 | FD-41 | P.19 | P.64 |
| | FD-41W | | |
| FD-WV42 | FD-V30 | P.19 | P.64 |
| | FD-V30W | | |
| FD-WZ4 | FD-Z20W | P.21 | P.65 |
| FD-WZ4HB | FD-Z20HBW | | |
| FD-WZ7 | FD-Z40W | | |
| FD-WZ7HB | FD-Z40HBW | P.11 | P.56 |
| ————— | FD-30 | | |
| ————— | FD-40 | | |
| ————— | FD-60 | | |
| ————— | FD-S30 | P.15/P.23 | P.63 |
| ————— | FD-R31G | | |
| ————— | FD-R32EG | P.15 | P.63 |
| ————— | FD-R33EG | | |
| ————— | FD-R34EG | P.15 | P.63 |
| ————— | FD-R41 | | |

New product introduction

Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No.

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers

FX-500 series

FX-100 series

INDEX

Tough Fiber

Unbreakable ! More flexible ! ECO !
Conventional 3 types rolled into 1 !!

Flexible fiber
Flexible durability

1 million
times

Sharp bending fiber
Bending radius

R2~R1
mm

General purpose fiber
Bending radius


R25
mm

in

Tough Fiber

Unbreakable


Flexible durability **10** million times (Typical)
Bending conditions Bending radius: R10 mm
Reciprocating bending: 180°



More flexible
Bending radius R2~R4
mm



ECO




Stainless steel fittings are used
for the fiber head of all models.

- Clearly conforms to RoHS
- Can be used for secondary battery
- Improved mounting strength

New tough fibers exceed normal optic fibers!


Tough fibers can be used on moving parts, can be bent with precision, and offer high quality for all purposes. They go beyond what was commonly thought to be possible.

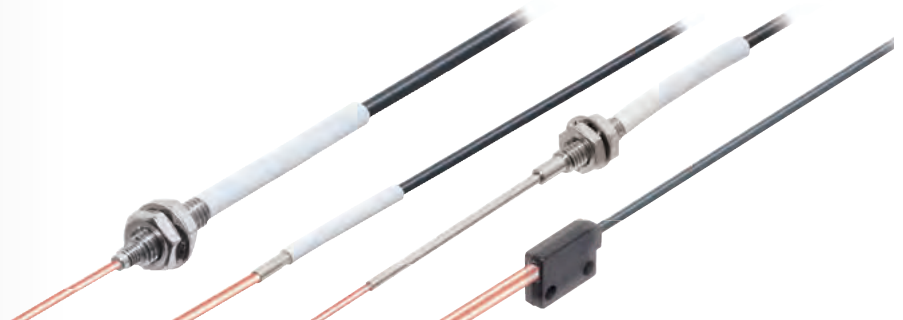

Unbreakable

Bending conditions

Bending radius: R10 mm **R0.394 in**,
Reciprocating bending: 180°




Flexible durability

10 million times
(Typical)

ECO

Stainless steel fittings are used for the fiber head of all models.



- Clearly conforms to RoHS
- Can be used for secondary batteries
- Improved tightening torque

More flexible

R2 to R4 mm **R0.079 to R0.157 in**

Example: FT-31



Example: FT-42



Reduced the time in selecting fiber and in registering part numbers

For Designers

High-quality

- High-quality in whichever tough fiber you choose!
- Easy selection!
- Reduces risk of breaking and bending during installation!


For Buyers

Low Price

- Cost savings!
- Reduced registration of part numbers!
- Reduced maintenance time in keeping stocks and replacement!

Reduced variation in detection

Beams at the fiber aperture are uniform, leading to stable sensing.



Generally flexible fibers and sharp bending fibers are composed of multiple fiber cores, often resulting in large variations in light intensity.



The new standard fiber is composed of a single fiber core, achieving uniform light intensity.

- Uniform and highly accurate sensing
- Stable sensing even if the fiber is bent

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options
Semi-custom fibers


Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series

INDEX

Super Quality

- It is a fiber with superior light intensity stability and simple digital management when combined with the **FX-500** series amplifier.
- It offers stable sensing with an extremely small beam axis curvature and gap.

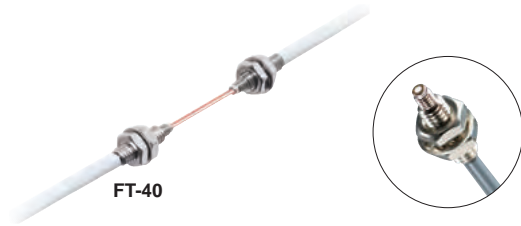


Digital management is simple due to small differences in body.

When connected with the **FX-500** series amplifiers, it has up to 4 times improved stability of incident light intensity compared with traditional fibers. Management is simple even when replacing amplifiers because the digital display shows the approximate value.

Super quality fiber + **FX-500 series**

"Stabilized incident light intensities" even in multiple units

Emitter intensity is also stable due to few curvatures and gaps in the beam axis.

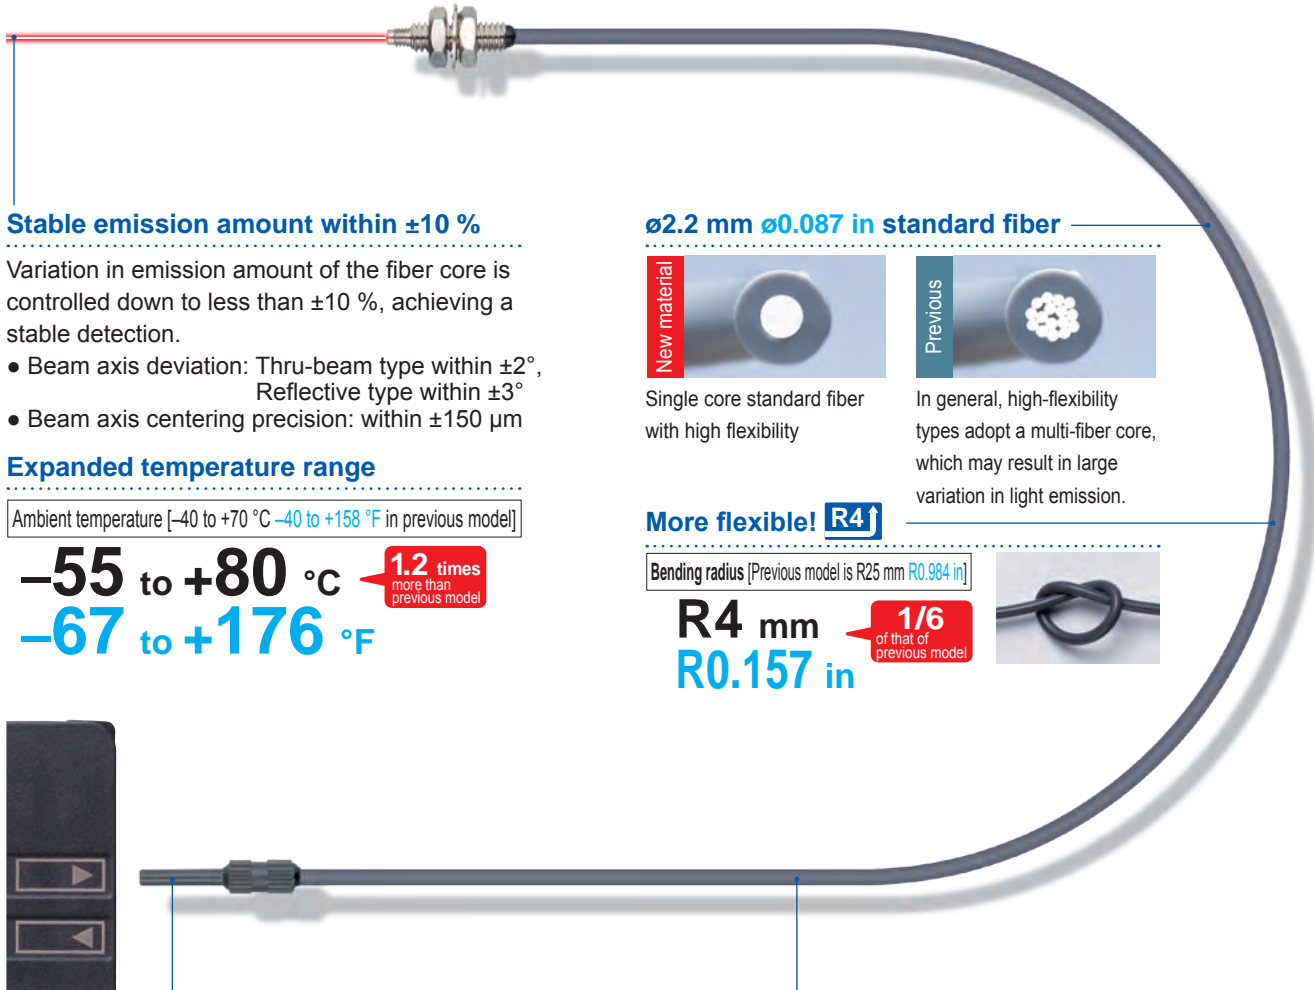

Stable emission amount within ±10 %

Variation in emission amount of the fiber core is controlled down to less than ±10 %, achieving a stable detection.

- Beam axis deviation: Thru-beam type within ±2°, Reflective type within ±3°
- Beam axis centering precision: within ±150 μm

ø2.2 mm ø0.087 in standard fiber

| | | | |
|---------------------|--|-----------------|---|
| New material | | Previous | |
| | Single core standard fiber with high flexibility | | In general, high-flexibility types adopt a multi-fiber core, which may result in large variation in light emission. |

Expanded temperature range

Ambient temperature [-40 to +70 °C -40 to +158 °F in previous model]

-55 to +80 °C 1.2 times more than previous model

-67 to +176 °F

More flexible! **R4**

Bending radius [Previous model is R25 mm R0.984 in]

R4 mm 1/6 of that of previous model

R0.157 in



Integrated high-precision plug

The centering precision of the fiber core attached to the inserting plug is doubled. As the insertion precision is increased, the variation among units can be greatly suppressed.

- Centering precision: within ±40 μm

More bendable!

Bending durability [Previous model is 1,000 times]

10 million times 10,000 times more than previous model

* Bending conditions
Bending radius: R10 mm **R0.394 in**,
Reciprocating bending 180°

LIST OF FIBERS

Thru-beam type (one pair set)

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length | Sensing range (mm in) | | | Beam axis dia. (mm) | Beam axis position/Inclination of beam axis | Optical transmission loss | Protection | Ambient temp. | Dimensions | |
|-------------|--------------------------|------------------------|--------------------------|--------------------|---|---|--|---------------------|---|---------------------------|------------|---------------|------------|------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | | | | | |
| Threaded | M3 | Tough FT-30 | R2 Bending durability | 2 m | STD 400 15.748 | 810 31.890 650 25.91 210 8.268 75 2.953 | 135 5.315 400 15.748 | ∅0.5 | 150 μm ±2° | ±10 % | IP67 | -55 to +80 °C | P.48 | |
| | M4 | Tough FT-40 | R4 Bending durability | | STD 1,200 47.244 HYPR (Note) 3,600 141.732 | 2,200 86.614 1,700 66.929 530 20.866 190 7.480 | 320 12.598 870 34.252 | ∅1 | | | | | | |
| Cylindrical | ∅1.5 | Tough FT-S20 | R2 Bending durability | | STD 400 15.748 HYPR 1,350 53.150 | 810 31.890 650 25.91 210 8.268 75 2.953 | 135 5.315 400 15.748 | ∅0.5 | | | | | | P.52 |
| | ∅3 | Tough FT-S30 | R4 Bending durability | | STD 1,200 47.244 HYPR (Note) 3,600 141.732 | 2,200 86.614 1,700 66.929 530 20.866 190 7.480 | 320 12.598 870 34.252 | ∅1 | | | | | | |

Note: The fiber cable length practically limits the sensing range.

Reflective type

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length | Sensing range (mm in) (Note) | | | Beam axis position/Inclination of beam axis | Optical transmission loss | Protection | Ambient temp. | Dimensions | | | | |
|-------------|--------------------------|------------------------|--------------------------|--------------------|-------------------------------------|--|--|---|---------------------------|------------|---------------|------------|------|------|--|--|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | | | | | | | |
| Threaded | M3 | Tough FD-30 | R2 Bending durability | 2 m | STD 160 6.299 HYPR 600 23.622 | 330 12.992 250 9.843 80 3.150 25 0.984 | 45 1.772 155 6.102 | 150 μm ±3° | ±10 % | IP67 | -55 to +80 °C | P.56 | | | | |
| | M4 | Tough FD-40 | R4 Bending durability | | STD 520 20.472 HYPR 1,550 61.024 | 900 35.433 740 29.134 260 10.236 90 3.543 | 140 5.512 420 16.535 | | | | | | P.57 | | | |
| | M6 | Tough FD-60 | | | STD 160 6.299 HYPR 600 23.622 | 330 12.992 250 9.843 80 3.150 25 0.984 | 45 1.772 155 6.102 | | | | | | | P.64 | | |
| Cylindrical | ∅3 | Tough FD-S30 | R4 Bending durability | | | | | | | | | | | | | |


Note: The sensing range is specified for white non-glossy paper.

Threaded Type

- It is a standard fiber which is mounted using nuts. It has reasonable pricing while drastically improving flexing performance.
- With the lens installable type, long distance sensing and microscopic object sensing is possible by installing a lens.
- A protective tube and a sturdy stainless jacket type that prevents disconnection are also prepared.

Stainless steel fittings are used for the fiber head of all models.

- Clearly conforms to RoHS
- Can be used for secondary battery
- Improved mounting strength



* Some models not included (FT-140)

Coaxial type FD-□G□ in which high-precision positioning can be achieved.

It is a coaxial fiber that encloses the circumference of the emitter fiber at the center with the receiver fiber. This is suitable for high-precision positioning. It can perform sensing without affecting the approach direction of the work.



Supports spot lenses and zoom lenses!

LIST OF FIBERS

Thru-beam type (one pair set)

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length (m) | Sensing range (mm in) (Note 1) | | | Beam axis dia. (mm) | Beam axis position/Inclination of beam axis | Protection | Ambient temp. | Dimensions |
|------------------------------|-----------------------------|-----------------------------|---------------------|-----------------------------|--------------------------------|---------------------|---|---------------------|---|---------------|---------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | | | |
| Threaded | | Tough FT-31 | R2 | Free-cut | STD 315 12.402 | 770 30.315 | 130 5.118 | 150 μm /±2° | IP67 | -55 to +80 °C | P.48 | |
| | | HYPR 1,350 53.150 | 550 21.654 | | 210 8.268 | | | | | | | |
| | | FT-31W | R1 | STD 260 10.236 | 590 23.228 | 80 3.150 | 150 μm /±3° | -40 to +60 °C | | | | |
| | | HYPR 990 38.976 | 440 17.323 | 150 5.906 | | | | | | | | |
| | | FT-43 | R4 | 2 m | STD 1,400 55.118 | 2,800 110.236 | 350 13.780 | 150 μm /±2° | -55 to +80 °C | | | |
| | | HYPR (Note 2) 3,600 141.732 | 2,100 82.677 | | 770 30.315 | | | | | | | |
| | | Tough FT-42 | R4 | 2 m | STD 1,130 44.488 | 2,050 80.709 | 300 11.811 | 150 μm /±2° | -55 to +80 °C | | | |
| | | HYPR (Note 2) 3,600 141.732 | 1,600 62.992 | | 530 20.866 | | | | | | | |
| | | FT-42W | R1 | 2 m | STD 800 31.496 | 1,900 74.803 | 260 10.236 | 150 μm /±3° | -40 to +60 °C | | | |
| | | HYPR 3,300 129.921 | 1,400 55.118 | | 490 19.291 | | | | | | | |
| | FT-45X | R4 | 1 m | STD 1,200 47.244 | 1,600 62.992 (Note 2) | 340 13.386 | 150 μm /±2° | -55 to +80 °C | | | | |
| | HYPR (Note 2) 1,600 62.992 | 1,600 62.992 (Note 2) | | 630 24.803 | 200 7.874 | | | | | | | |
| | Tough FT-R40 | R4 | 2 m | STD 930 36.614 | 1,750 68.898 | 270 10.630 | 150 μm /±2° | -55 to +80 °C | | | | |
| | HYPR (Note 2) 3,600 141.732 | 1,500 59.055 | | 500 19.685 | 740 29.134 | | | | | | | |
| | Tough FT-140 | R4 | 10 m | STD (Note 2) 19,600 771.654 | 19,600 771.654 (Note 2) | 14,000 551.181 | 19,600 771.654 (Note 2) | -40 to +70 °C | P.48 | | | |
| HYPR (Note 2) 19,600 771.654 | 16,000 629.921 | 6,300 248.031 | | | | | | | | | | |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The fiber cable length practically limits the sensing range.

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com



FT-42

<Thru-beam type> FT-31/31W/43/42/42W
FT-45X/R40
<Reflective type> FD-31/41/62/61/R60

More user-friendly, high quality fiber

Improved centering accuracy

The beam axis deviation of each unit is kept within ±3° and the beam axis centering accuracy is kept within ±150 μm.

(Within ±5° and ±90 μm for ultra small diameter fibers)

- Makes beam axis adjustment easier
- Improves mounting hole machining accuracy
- Improves sensing accuracy



Improved specularity


High precision polishing is accomplished by using the PCTC polishing technique.

The specularity of the end face of the fiber is 5 times greater.

- Light intensity is increased, enabling stable sensing.

Application

Detecting a presence of a workpiece




FIBER OPTIONS

Lens
(For thru-beam type fiber)
► P.42

Lens
(For reflective type fiber)
► P.43

Protective tube ► P.45

- FTP-□
- FDP-□



LIST OF FIBERS

Reflective type

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length Free-cut | Sensing range (mm in) (Note 1, 2) | | | Beam axis position/ Inclination of beam axis | Protection | Ambient temp. | Dimensions | | |
|----------|--------------------------|--------------------------|--------------------------|--------------------------------|-----------------------------------|---------------------|--|---|----------------|---------------|------------|---------------|------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | | | | |
| M3 | | Tough FD-31 | R2 Bending durability | 2 m | STD 125 4.921 | 290 11.417 | 35 1.378 | 150 μm /±3° | IP67 | -55 to +80 °C | P.56 | | |
| | | | | | HYPR 515 20.276 | 220 8.661 | 140 5.512 | | | | | | |
| | | FD-31W | R1 | 2 m | STD 80 3.150 | 180 7.087 | 15 0.591 | — | — | -40 to +60 °C | | | |
| | | | | | HYPR 330 12.992 | 140 5.512 | 60 2.362 | | | | | | |
| | | Tough FD-32G | R2 Bending durability | 1 m | STD 200 7.874 | 380 14.961 | 70 2.756 | — | — | -55 to +80 °C | | | |
| | | | | | HYPR 650 25.591 | 270 10.630 | 190 7.480 | | | | | | |
| | | FD-32GX | R2 | 1 m (Note 3) | STD 200 7.874 | 410 16.142 | 75 2.953 | — | — | — | | | |
| | | | | | HYPR 630 24.803 | 360 14.173 | 210 8.268 | | | | | | |
| | | FD-EG30 | R4 | 500 mm | STD 48 1.890 | 130 5.118 | 20 0.787 | — | — | -40 to +70 °C | | | |
| | | | | | HYPR 170 6.693 | 110 4.331 | 70 2.756 | | | | | | |
| | FD-EG31 | R4 | 500 mm | STD 20 0.787 | 45 1.772 | 7 0.276 | — | — | -20 to +60 °C | | | | |
| | | | | HYPR 85 3.346 | 35 1.378 | 25 0.984 | | | | | | | |
| Threaded | | Tough FD-41 | R2 Bending durability | 2 m | STD 125 4.921 | 290 11.417 | 35 1.378 | 150 μm /±3° | IP67 | -55 to +80 °C | P.56 | | |
| | | | | | HYPR 515 20.276 | 220 8.661 | 140 5.512 | | | | | | |
| | | FD-41W | R1 | 2 m | STD 270 10.630 | 630 24.803 | 80 3.150 | — | — | -40 to +60 °C | | | |
| | | | | | HYPR 900 35.433 | 430 16.929 | 230 9.055 | | | | | | |
| | | Tough FD-42G | R2 Bending durability | 2 m | STD 200 7.874 | 380 14.961 | 70 2.756 | — | — | -55 to +80 °C | | | |
| | | | | | HYPR 650 25.591 | 270 10.630 | 190 7.480 | | | | | | |
| | | FD-42GW | R1 | 2 m | STD 150 5.906 | 340 13.386 | 45 1.772 | — | — | -40 to +60 °C | | | |
| | | | | | HYPR 670 26.378 | 280 11.024 | 140 5.512 | | | | | | |
| | M6 | | FD-62 | R4 Bending durability | 2 m | STD 520 20.472 | 1,000 39.370 | 170 6.693 | 150 μm /±3° | IP67 | | -55 to +80 °C | P.57 |
| | | | | | | HYPR 1,500 59.055 | 940 37.008 | 450 17.717 | | | | | |
| | | Tough FD-61 | R4 Bending durability | 2 m | STD 450 17.717 | 840 33.071 | 120 4.724 | — | — | -40 to +60 °C | | | |
| | | | | | HYPR 1,400 55.118 | 670 26.378 | 410 16.142 | | | | | | |
| | | FD-61W | R1 | 2 m | STD 270 10.630 | 630 24.803 | 80 3.150 | — | — | -40 to +60 °C | | | |
| | HYPR 900 35.433 | | | | 430 16.929 | 230 9.055 | | | | | | | |
| | Tough FD-61G | R4 Bending durability | 2 m | STD 420 16.535 | 800 31.496 | 120 4.724 | — | — | -55 to +80 °C | | | | |
| | | | | HYPR 1,100 43.307 | 650 25.591 | 350 13.780 | | | | | | | |
| | FD-64X | R4 | 1 m | STD 280 11.024 | 500 19.685 | 75 2.953 | — | — | -55 to +80 °C | | | | |
| | | | | HYPR 670 26.378 | 410 16.142 | 220 8.661 | | | | | | | |
| | Tough FD-R60 | R4 Bending durability | 2 m | STD 290 11.417 | 600 23.622 | 110 4.331 | 150 μm /±3° | IP67 | -55 to +80 °C | | | | |
| | | | | HYPR 1,100 43.307 | 550 21.654 | 240 9.449 | | | | | | | |

- Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20% max. depending upon how the fiber is cut.
 2) The sensing range is specified for white non-glossy paper.
 3) The allowable cutting range is 700 mm 27.559 in from the end that the amplifier inserted.

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

New product introduction
Tough Fiber

Fiber Selection Guide

Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers

- Super Quality
- Threaded Type
- Square Head Type
- Cylindrical Type
- Sleeve
- Flat Type
- Small Spot
- Narrow Beam
- Wide Beam
- Convergent Reflective Type
- Retroreflective Type
- Chemical / Oil-resistant
- Heat-resistant
- Vacuum-resistant
- Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

- Thru-beam Type
- Retroreflective Type
- Reflective Type
- Others

Amplifiers

- FX-500 series
- FX-100 series

INDEX

New product introduction
Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers


FX-500 series

FX-100 series

INDEX


Square Head Type

- Compact, space-saving design brings clean installation on the side of a conveyor belt.
- As for lens compatible type fiber head, sensing range becomes longer when a lens is attached to the thru-beam type fiber, spot detection is achieved in case of the reflective type.
- A lens equipped type fiber head is also available.
- Oil resistant type is also available. Please refer to p.28

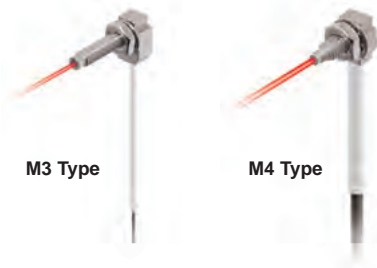

Compact, space-saving

Fiber can be installed at a minimum pitch of M3: 6.5 mm 0.256 in or M4: 8.5 mm 0.335 in using needle-nose pliers.

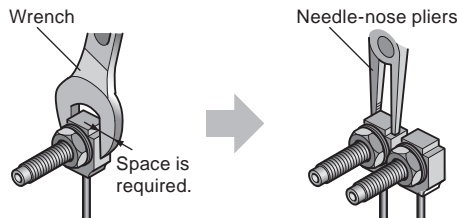

Compact installation

Square head fiber heads can be installed cleanly on the side of a conveyor belt. The design makes it less likely for tools and other objects to catch on the fiber cable during installation.

FT-R□ / FD-R□




Standard fiber




Introducing square R1 mm (R0.039 in) (sharp bending) fiber

We now offer a sharp bending fiber featuring a low level of light fluctuations, even when bent at R1 mm R0.039 in. It is also available with a lens capable of long-range sensing.

FT-R41W/R42W



FT-R42W (With lens)

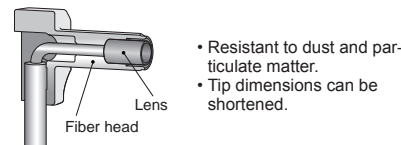

Full-protection type

FT-R60Y (Square head type M6 / thru-beam type)

High environmental resistance



The head, nut, and washer are made from rust-resistant SUS304. The unbreakable tough fiber with high durability is covered in a fluorine resin tube. The fiber head is also covered with a fluorine resin component, achieving a high level of environmental resistance.

Less susceptibility to oil adhesion thanks to fluorine resin

Fibers deliver stable detection, since the sensing part is sealed with fluorine resin, which does not allow oil penetration. Additionally, the detection part features a convex design made of fluorine resin, achieving lower friction than glass.

Resistant to oil and coolant

The fiber head and fiber cable are connected by the "fastening and caulking" method without using adhesives. This method eliminates concerns that adhesives will absorb moisture in high-humidity environments and damage the fiber. The enclosure achieves IP68G protection, so the fiber can be installed around metal processing machines shrouded in the oil mist.

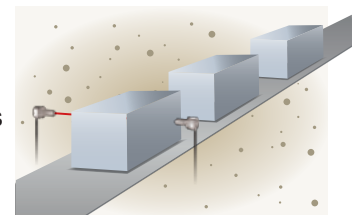


| Test oil | Product |
|---------------------------------|--|
| Lubricating oil | Velocite Oil No. 3 |
| Non-water-soluble cutting oil | Yushiron Cut Abas KZ201 Yushiron Cut UH75 |
| Water-soluble cutting oil | Syntilo 9954 (10% diluted) Yushiroken S50N (2% diluted) |
| Alcohol-based neutral detergent | Super Teepol |

*Yushiron and Yushiroken are registered trademarks of Yushiro Chemical Industry Co., Ltd.

Cable-protection type FT-R44Y / FD-R61Y

FT-R44Y (Square head type M4 / thru-beam type)

FD-R61Y (Square head type M6 / reflective type)

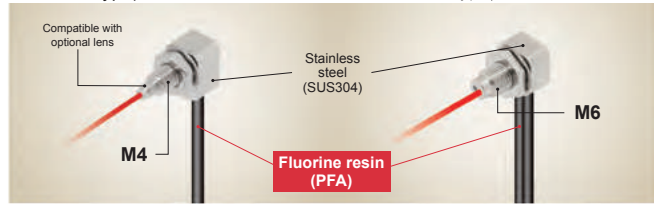

Even stronger than tough fiber

The tough fiber has been reinforced by covering it with a fluorine resin tube so that it can be used even in harsh environments where oils and solvents are used. The fiber cable will not harden or break, even if it is splashed with oil.



Protective structure IP67

The head, nut, and washer are made from rust-resistant SUS304.



LIST OF FIBERS

Thru-beam type (one pair set)

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length Free-cut | Sensing range (mm in) (Note 1) | | | Beam axis dia. (Fiber Core) (mm) | Protection | Ambient temp. | Dimensions |
|-------------|--|--------------------------|--|--|--|---|--|----------------------------------|---------------|---------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | | |
| Square head | M3 | Tough FT-R31 | R2 | 2m | STD 270 10.630 HYPR 1,000 39.370 | 580 22.835 440 17.323 160 6.299 55 2.165 | 100 3.937 340 13.386 | ∅0.5 | IP67 | -55 to +80 °C | P.51 |
| | Lens mountable | Tough FT-R43 | R4 | | STD 720 28.346 HYPR 3,000 118.110 | 1,600 62.992 1,100 43.307 430 16.929 130 5.118 | 210 8.268 640 25.197 | ∅1 | | | |
| | M4 | FT-R41W | R1 | | STD 800 31.496 HYPR 3,200 125.984 | 1,800 70.866 1,400 55.118 460 18.110 150 5.906 | 250 9.843 710 27.953 | ∅2.2 | IP40 | -40 to +60 °C | |
| | With expansion lens | FT-R42W | | | STD 2,200 86.614 HYPR (Note2) 3,600 141.732 | 3,600 141.732 (Note 2) 3,500 137.795 1,300 51.181 460 18.110 | 510 20.079 2,000 78.740 | | | | |
| | Cable-protection type Compatible with lens | Tough NEW FT-R44Y | R4 | | STD 720 28.346 HYPR 3,000 118.110 | 1,600 62.992 1,100 43.307 430 16.929 130 5.118 | 210 8.268 640 25.197 | ∅1 | IP67 (Note 3) | -55 to +80 °C | |
| M6 | Full-protection type Tough NEW FT-R60Y | R4 | STD 2,100 82.677 HYPR (Note2) 3,600 141.732 | 3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 1,260 49.606 400 15.748 | 690 27.165 1,890 74.409 | ∅3.5 | IP68G | | | | |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The fiber cable length practically limits the sensing range.
3) The fiber part is oil-resistant.

Reflective type

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length Free-cut | Sensing range (mm in) (Note 1, 2) | | | Beam axis dia. (Fiber Core) (mm) | Protection | Ambient temp. | Dimensions |
|-------------|---|----------------------|-----------------------------------|---|-----------------------------------|---|--|----------------------------------|------------|---------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | | |
| Square head | Coaxial, Lens mountable M3 | Tough FD-R31G | R2 | 500mm | STD 170 6.693 HYPR 530 20.866 | 310 12.205 260 10.236 85 3.346 27 1.063 | 45 1.772 150 5.906 | Emitter ∅0.5 | IP40 | -55 to +80 °C | P.63 |
| | Coaxial, Lens mountable M3 | FD-R32EG | R4 | | STD 45 1.772 HYPR 170 6.693 | 110 4.331 92 3.622 30 1.181 9 0.354 | 20 0.787 68 2.677 | Emitter ∅0.25 | | | |
| | Coaxial, Lens mountable M3 | FD-R34EG | | | STD 38 1.496 HYPR 130 5.118 | 90 3.543 70 2.756 23 0.906 7 0.276 | 17 0.669 60 2.362 | Emitter ∅0.175 | | | |
| | Coaxial, Lens mountable M3 | FD-R33EG | | | STD 19 0.748 HYPR 84 3.307 | 44 1.732 33 1.299 11 0.433 3 0.118 | 7 0.276 22 0.866 | Emitter ∅0.125 | | | |
| | M4 | Tough FD-R41 | R2 | | STD 210 8.268 HYPR 710 27.953 | 430 16.929 320 12.598 100 3.937 34 1.339 | 60 2.362 170 6.693 | ∅0.75 | IP67 | -55 to +80 °C | |
| M6 | Cable-protection type Tough NEW FD-R61Y | R4 | STD 280 11.024 HYPR 990 38.976 | 610 24.016 435 17.126 160 6.299 50 1.969 | 85 3.346 185 7.283 | — | IP67 (Note 3) | | | | |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The sensing range is specified for white non-glossy paper.
3) The fiber part is oil-resistant.

FIBER OPTIONS

Lens (For thru-beam type fiber) ▶P.42



Lens (For square head M3 reflective fiber) ▶P.43



Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

New product introduction

Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No.

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers

FX-500 series

FX-100 series

INDEX

New product introduction
Tough Fiber

Fiber Selection Guide

Model
Choose by shape/application
How to read Model No
Earlier models comparison table

Fibers

Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam

Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers

FX-500 series
FX-100 series

INDEX

Cylindrical Type

- Has a slender shape which can be mounted in narrow locations using set screws.
- Line up that includes ultra-thin fibers with $\phi 0.25$ mm tips.



<Thru-beam type> FT-S21/S21W/S31W
<Reflective type> FD-S32/S31

- User-friendly, high quality fiber
- Improved centering accuracy and specularity

Stainless steel fittings are used for the fiber head of all models.

- Clearly conforms to RoHS
- Can be used for secondary battery
- Improved mounting strength

LIST OF FIBERS

Thru-beam type (one pair set)

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length : Free-cut | Sensing range (mm in) (Note 1) | | | Beam axis dia. (mm) | Beam axis position/Inclination of beam axis | Protection | Ambient temp. | Dimensions | | |
|-------------|--------------------------------|--|---------------------|----------------------------------|-------------------------------------|---|--|-------------------------------|---|-----------------------------|---------------|------------|---------------|------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | | | | | |
| Cylindrical | $\phi 1$ | Tough FT-S11 | R2 | 500 mm | STD 190 3.543 HYPR 350 13.780 | 210 8.268 160 6.299 60 2.362 19 0.748 | 40 1.575 90 3.543 | $\phi 0.25$ | — | — | -55 to +80 °C | P.52 | | |
| | $\phi 1.5$ | Tough FT-S21 | R1 | 2 m | STD 315 12.402 HYPR 1,350 53.150 | 770 30.315 550 21.654 210 8.268 70 2.756 | 130 5.118 340 13.386 | $\phi 0.5$ | 150 μ m / $\pm 2^\circ$ | IP67 | -40 to +60 °C | | | |
| | | FT-S21W | | | STD 260 10.236 HYPR 990 38.976 | 590 23.228 440 17.323 150 5.906 53 2.087 | 80 3.150 240 9.449 | | 150 μ m / $\pm 3^\circ$ | | | | | |
| | $\phi 2.5$ | With lens, Long sensing range $\phi 2.5$ | FT-S32 | R10 | | STD 3,100 122.047 HYPR (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) 1,800 70.866 600 23.622 | 1,100 43.307 3,000 118.110 | $\phi 2$ | — | IP40 | | -40 to +70 °C | |
| | $\phi 3$ | | FT-S31W | R1 | | STD 800 31.496 HYPR 3,300 129.921 | 1,900 74.803 1,400 55.118 490 19.291 160 6.299 | 260 10.236 720 28.346 | $\phi 1$ | 150 μ m / $\pm 3^\circ$ | — | | -40 to +60 °C | |
| | Side-view Ultra-small diameter | Narrow beam $\phi 0.125$ mm | Tough FT-E13 | R2 | 1 m | STD 15 0.591 HYPR 52 2.047 | 30 1.181 24 0.945 8 0.315 2 0.079 | 6 0.236 19 0.748 | $\phi 0.125$ | — | IP67 | | -40 to +70 °C | P.49 |
| | | Sleeve part cannot be bent. | Tough FT-E23 | R4 | 2 m | STD 75 2.953 HYPR 270 10.630 | 160 6.299 125 4.921 42 1.654 13 0.512 | 22 0.866 80 3.150 | $\phi 0.25$ | — | — | | -40 to +70 °C | |
| | | Narrow beam $\phi 0.25$ mm | | | | STD 3,500 137.795 HYPR (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 2,400 94.488 850 33.465 | 1,000 39.370 3,100 122.047 | $\phi 2.5$ | — | IP50 | | -40 to +60 °C | |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The fiber cable length practically limits the sensing range.

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.
Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type

Others

Amplifiers

FX-500 series
FX-100 series

INDEX

Reflective type

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length Free-cut | Sensing range (mm in) (Note 1, 2) | | | Beam axis position/ Inclination of beam axis | Protection | Ambient temp. | Dimensions |
|----------------------|--------------------------|------------------------|--------------------------|--------------------------------|---|---|--|---|------------|---------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | | |
| Cylindrical | | Tough FD-S21 | R2 Bending durability | 1 m | STD 80 3.150 HYPR 190 7.480 | 130 5.118 110 4.331 37 1.457 11 0.433 | 25 0.984 70 2.756 | — | IP40 | -55 to +80 °C | P.63 |
| | | Tough FD-S32 | R4 Bending durability | 2 m | STD 420 16.535 HYPR 1,200 47.244 | 790 31.102 660 25.984 220 8.661 75 2.953 | 120 4.724 345 13.583 | 150 μm /±3° | IP67 | -40 to +60 °C | P.64 |
| | | FD-S32W | R1 | | STD 270 10.630 HYPR 900 35.433 | 630 24.803 430 16.929 150 5.906 45 1.772 | 80 3.150 230 9.055 | — | | | |
| | | Tough FD-S31 | R2 Bending durability | 1 m | STD 125 4.921 HYPR 515 20.276 | 290 11.417 220 8.661 80 3.150 25 0.984 | 35 1.378 140 5.512 | 150 μm /±3° | IP40 | -40 to +60 °C | P.58 |
| | | FD-S33GW | R1 | | STD 150 5.906 HYPR 670 26.378 | 340 13.386 280 11.024 90 3.543 25 0.984 | 45 1.772 140 5.512 | — | | | |
| Ultra-small diameter | | FD-E13 | R4 | 1 m | STD 12 0.472 HYPR 50 1.969 | 29 1.142 25 0.984 7 0.276 2 0.079 | 5 0.197 15 0.591 | — | IP40 | -40 to +70 °C | P.58 |
| | | FD-E23 | | | STD 55 2.165 HYPR 170 6.693 | 120 4.724 80 3.150 30 1.181 9 0.354 | 20 0.787 70 2.756 | — | | | |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The sensing range is specified for white non-glossy paper.

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.
Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

Sleeve


- It is suitable for sensing in narrow locations and sensing minute objects because the fiber tip is a thin sleeve.
- The 40 mm sleeve type can be bent in any direction.



<Thru-beam type> FT-E13 / FT-E23 Ultra-small diameter fiber

Centering accuracy of 1/10 mm or less

Ultra-small diameter fibers with a compact head ensure precision centering accuracy* to stably detect minute parts.

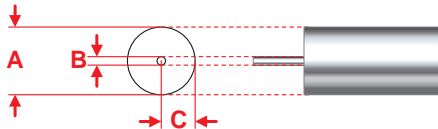

* Tolerance of A + Tolerance of B + Tolerance of C = ±0.09 mm

Dimensions UNCLEAR

Extra clearance needs to be added when designing and machining the mounting hole due to unclear dimensions. As a result, mounting variation increases and the beam axis deviates, resulting in a decrease in sensing accuracy or causing the sleeve to bend or break.


Dimensions CLEAR

Example: FT-E13

Highly accurate design and machining are possible due to clear mounting hole dimensions. As a result, mounting variation is minimal, improving sensing accuracy. In addition to this, as the beam axis alignment is not affected when the fiber is changed, readjustment is not necessary.


Minute sensing only possible with ultra small fiber

Detection of fine-pitch connector pins



Ultra-small diameter fiber with $\varnothing 0.125 \text{ mm } \varnothing 0.005 \text{ in}$ beam axis is able to detect the insertion or bending of fine-pitch connector pins.

Detection of tiny chips




Fiber can be installed with only the $\varnothing 0.25 \text{ mm } \varnothing 0.010 \text{ in}$ sleeve close to the minute section.

Stainless steel fittings are used for the fiber head of all models. ECO

- Clearly conforms to RoHS
- Can be used for secondary battery
- Improved mounting strength


Application

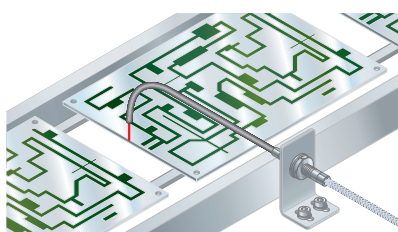

FIBER OPTION

Fiber bender

·FB-1



The fiber bender bends the sleeve part of the fiber head at the proper radius.

Note: Do not bend the sleeve part of any side-view type fiber or ultra-small diameter head type fiber.

LIST OF FIBERS

Thru-beam type (one pair set)

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length Free-cut | Sensing range (mm in) (Note 1, 2) | | | Beam axis dia. (mm) | Protection | Ambient temp. | Dimensions |
|-------------|---|-------------------------|-----------------------------------|--------------------------------|---|---|--|---------------------|------------|---------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | | |
| Threaded | M3 Sleeve 40mm M3 ø0.88 10 | Tough FT-31S | R2 Bending durability (Note 3) | 2 m | STD 315 12.402 HYPR 1,220 48.031 | 740 29.134 550 21.654 195 7.677 63 2.480 | 130 5.118 340 13.386 | ø0.5 | IP67 | -55 to +80 °C | P.48 |
| | M4 Sleeve 40mm M4 ø1.48 12 | Tough FT-42S | R4 Bending durability (Note 3) | 2 m | STD 1,130 44.488 HYPR (Note 2) 3,600 141.732 | 2,050 80.709 1,600 62.992 530 20.866 190 7.480 | 300 11.811 800 31.496 | ø1 | | | |
| Cylindrical | Ultra-small diameter ø3 Narrow beam ø0.125mm Sleeve part cannot be bent. ø0.25 ø3 5 15 | Tough FT-E13 | R2 Bending durability | 1 m | STD 15 0.591 HYPR 52 2.047 | 30 1.181 24 0.945 8 0.315 2 0.079 | 6 0.236 19 0.748 | ø0.125 | IP67 | -40 to +70 °C | P.49 |
| | | Tough FT-E23 | R2 Bending durability | 1 m | STD 175 2.953 HYPR 270 10.630 | 160 6.299 125 4.921 42 1.654 13 0.512 | 22 0.866 80 3.150 | ø0.25 | | | |
| | Side-view ø2 Sleeve part cannot be bent. ø1 ø2 20 15 | Tough FT-V23 | R4 Bending durability | 2 m | STD 450 17.717 HYPR 1,800 70.866 | 1,000 39.370 880 34.646 280 11.024 90 3.543 | 160 6.299 400 15.748 | ø0.75 | IP30 | -55 to +80 °C | P.52 |
| | | Tough FT-V25 | R2 Bending durability | | STD 240 9.449 HYPR 900 35.433 | 550 21.654 480 18.898 140 5.512 45 1.772 | 95 3.740 260 10.236 | ø0.5 | | | |
| | Side-view ø2.5 Sleeve part cannot be bent. ø1.5 ø2.5 15 15 | Tough FT-V24W | R1 | 2 m | STD 110 4.331 HYPR 380 14.961 | 230 9.055 200 7.874 60 2.362 20 0.787 | 35 1.378 90 3.543 | ø0.5 | IP30 | -40 to +60 °C | P.53 |
| | | Tough FT-V30 | R4 Bending durability | | STD 680 26.772 HYPR 2,200 86.614 | 1,200 47.244 1,000 39.370 340 13.386 100 3.937 | 180 7.087 480 18.898 | ø1.0 | | | |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
 2) The fiber cable length practically limits the sensing range.
 3) Bending radius of sleeve part is R10 mm R0.394 in or more.

Reflective type

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length Free-cut | Sensing range (mm in) (Note 1, 2) | | | Protection | Ambient temp. | Dimensions |
|-------------|---|--------------------------|-----------------------------------|--------------------------------|---|---|--|------------|---------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | |
| Threaded | Ultra-small diameter M3 Sleeve 15 mm M3 ø0.8 15 Sleeve part cannot be bent. | Tough FD-EG30S | R4 | 1 m | STD 50 1.969 HYPR 170 6.693 | 110 4.331 80 3.150 30 1.181 9 0.354 | 20 0.787 70 2.756 | IP40 | -40 to +70 °C | P.59 |
| | M4 Sleeve 40 mm M4 ø1.48 12 | Tough FD-41S | R2 Bending durability (Note 3) | 2 m | STD 125 4.921 HYPR 515 20.276 | 290 11.417 220 8.661 80 3.150 25 0.984 | 35 1.378 140 5.512 | IP67 | -55 to +80 °C | P.56 |
| | | Tough FD-41SW | R1 (Note 3) | | STD 80 3.150 HYPR 330 12.992 | 180 7.087 140 5.512 45 1.772 12 0.472 | 15 0.591 60 2.362 | | | |
| | M6 Sleeve 40 mm M6 ø2.5 15 | Tough FD-61S | R4 Bending durability (Note 3) | 2 m | STD 420 16.535 HYPR 1,200 47.244 | 790 31.102 660 25.984 220 8.661 75 2.953 | 130 5.118 360 14.173 | IP67 | -55 to +80 °C | P.57 |
| Cylindrical | Ultra-small diameter ø1.5 ø0.48 15 15 Sleeve part cannot be bent. | Tough FD-E13 | R4 | 1 m | STD 12 0.472 HYPR 50 1.969 | 29 1.142 25 0.984 7 0.276 2 0.079 | 5 0.197 15 0.591 | IP40 | -40 to +60 °C | P.58 |
| | | Tough FD-E23 | R4 | | STD 55 2.165 HYPR 170 6.693 | 120 4.724 80 3.150 30 1.181 9 0.354 | 20 0.787 70 2.756 | | | |
| | Side-view ø3 Small diameter ø3 ø1.5 15 15 Sleeve part cannot be bent. | Tough FD-V30 | R2 Bending durability | 2 m | STD 65 2.559 HYPR 240 9.449 | 130 5.118 120 4.724 35 1.378 14 0.551 | 25 0.984 75 2.953 | IP30 | -55 to +80 °C | P.64 |
| | | Tough FD-V30W | R1 | | STD 20 0.787 HYPR 80 3.150 | 40 1.575 30 1.181 10 0.394 2 0.079 | 6 0.236 20 0.787 | | | |
| | Side-view ø5 Sleeve part cannot be bent. ø5 ø2 15 20 | Tough FD-V50 | R4 Bending durability | 2 m | STD 120 4.724 HYPR 370 14.567 | 220 8.661 210 8.268 75 2.953 25 0.984 | 40 1.575 100 3.937 | IP30 | -55 to +80 °C | P.65 |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
 2) The sensing range is specified for white non-glossy paper.
 3) Bending radius of sleeve part is R10 mm R0.394 in or more.

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.
 Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

New product introduction

Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers

FX-500 series

FX-100 series



INDEX

Flat Type

Since it has a thin, rectangular shape, it can be installed in narrow locations. It is also a fiber with good workability and can be mounted directly with screws.


1 point mounting

The sensor can be mounted on 1 point with either M2 screw or M3 screw. Metal sleeve in the enclosure helps to be tightened firmly even with a single screw.

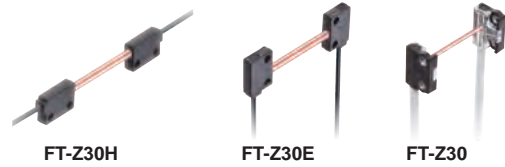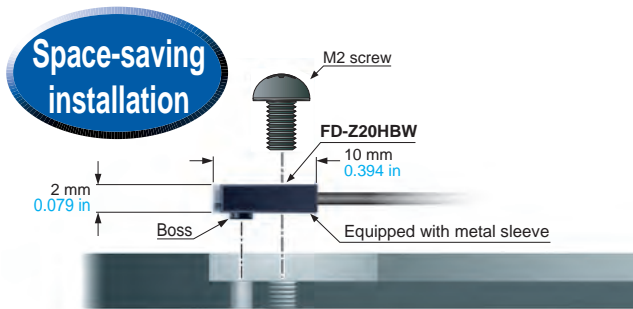

Fiber guide system contributes to space-saving

FT-Z□HBW and FD-Z□HBW is equipped with a fiber guide system. This enables to mount either way of top sensing and side sensing.

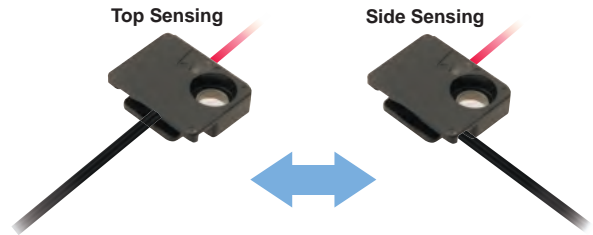

LIST OF FIBERS

Thru-beam type (one pair set)





| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length Free-cut | Sensing range (mm in) (Note 1) | | | Beam axis dia. (mm) | Protection | Ambient temp. | Dimensions | |
|-------------------------------------|-----------------------------------|----------------------|-----------------------------|--------------------------------|--------------------------------|------------------------|---|---------------------|------------|---------------|------------|---------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | | | |
| Flat | Top sensing W3 x H8 x D12 | Tough FT-Z30H | R2 | 2 m | STD 3,500 137.795 | 3,600 141.732 (Note 2) | 1,400 55.118 | 2 x 3 | IP40 | -40 to +60 °C | P.54 | |
| | Top sensing W3 x H8 x D12 | FT-Z30HW | R1 | | HYPR (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) | 2,600 102.362 | | | | | 3,200 125.984 |
| | Side sensing W3 x H12 x D8 | Tough FT-Z30E | R2 | | STD 3,500 137.795 | 3,600 141.732 (Note 2) | 2,400 94.488 | | | | | 1,200 47.244 |
| | Side sensing W3 x H12 x D8 | FT-Z30EW | R1 | | HYPR (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) | 740 29.134 | | | | | 3,200 125.984 |
| | Front sensing W8.5 x H12 x D3 | Tough FT-Z30 | R2 | | STD 3,400 133.858 | 3,600 141.732 (Note 2) | 2,000 78.740 | | | | | 1,400 55.118 |
| | Front sensing W8.5 x H12 x D3 | FT-Z30W | | | HYPR (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) | 630 24.803 | | | | | 2,600 102.362 |
| | Front sensing W8.5 x H12 x D3 | FT-Z30W | | | STD 2,100 82.677 | 3,600 141.732 (Note 2) | 410 16.142 | 710 27.953 | | | | |
| | Front sensing W8.5 x H12 x D3 | FT-Z30W | | | HYPR (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) | 1,200 47.244 | 2,300 90.551 | | | | |
| | Front sensing W10 x H7 x D2 | FT-Z20W | | | STD 620 24.409 | 1,500 59.055 | 420 16.535 | 280 11.024 | | | | |
| | Front sensing W10 x H7 x D2 | FT-Z20W | | | HYPR (Note 2) 1,600 62.992 | 1,500 59.055 | 130 5.118 | 730 28.740 | | | | |
| | Fiber bending type W2 x H10 x D10 | FT-Z20HBW | R1 | | STD 260 10.236 | 670 26.378 | 180 7.087 | 100 3.937 | | | | |
| | Front sensing W14 x H7 x D3.5 | FT-Z40W | | | HYPR (Note 2) 3,600 141.732 | 3,300 129.921 | 290 11.417 | 1,200 47.244 | | | | |
| Fiber bending type W3.5 x H14 x D11 | FT-Z40HBW | | STD 800 31.496 | 1,900 74.803 | 490 19.291 | 260 10.236 | | | | | | |
| Fiber bending type W3.5 x H14 x D11 | FT-Z40HBW | | HYPR (Note 2) 3,300 129.921 | 1,400 55.118 | 160 6.299 | 720 28.346 | | | | | | |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The fiber cable length practically limits the sensing range.

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com


Reflective type

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length ✂️: Free-cut | Sensing range (mm in) (Note 1, 2) | | | Protection | Ambient temp. | Dimensions |
|-------------------|---|-----------|---------------------|------------------------------------|-----------------------------------|---|--|------------|---------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | |
| Flat With boss | Front sensing  W10 x H7 x D2 | FD-Z20W | R1 | ✂️ 1 m | STD 1 to 65 0.039 to 2.559 | 150 5.906 130 5.118 | 2 to 32 0.079 to 1.260 | IP40 | -40 to +60 °C | P.65 |
| | Fiber bending type  W2 x H10 x D10 | FD-Z20HBW | | | HYPH 260 10.236 | 2 to 45 0.079 to 1.772 5 to 13 0.197 to 0.512 | 0.039 to 3.150 | | | |
| | Front sensing  W14 x H7 x D3.5 | FD-Z40W | | ✂️ 2 m | STD 190 7.480 | 440 17.323 390 15.354 | 1 to 74 0.039 to 2.913 | IP40 | | |
| | Fiber bending type  W3.5 x H14 x D11 | FD-Z40HBW | | | HYPH 790 31.102 | 1 to 120 0.039 to 4.724 2 to 35 0.079 to 1.378 | 200 7.874 | | | |
| | | | | | STD 260 10.236 | 540 21.260 470 18.504 | 1 to 90 0.039 to 3.543 | IP67 | | |
| | | | | | HYPH 760 29.921 | 2 to 50 0.079 to 1.969 | 0.5 to 240 0.020 to 9.449 | | | |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The sensing range is specified for white non-glossy paper.

Small Spot

■ Sensing of minute objects can be performed by combining the fiber and spot lens. The spot diameter can also be changed.




Applications

Packing detection




Because it's a side-view type, it can be mounted even in narrow spaces.

Number of IC pins checking

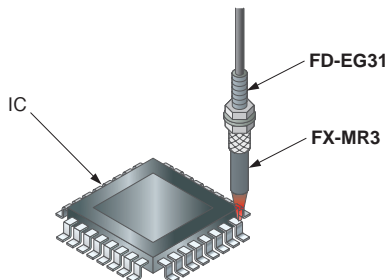

Discrimination of 0603 chip direction

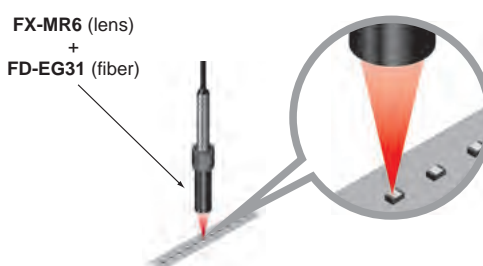

Three optional lenses for reflective type fiber are available. Perfect for chip component detection applications.

FX-MR7 / MR8 / MR9

Finest spot lens FX-MR7

About 3 times more light received (compared to previous models)

Since there is a large difference in the amount of light received in applications such as direction detection, it is easy to set a threshold that will allow stable detection. Additionally, these products offer an S/N ratio that is 1.3 times better than previous models.



Parallel light lens FX-MR9

Long-range parallel light

Depending on the fiber with which it is used, this lens creates parallel light with a spot diameter of approximately $\varnothing 4 \text{ mm } \varnothing 0.157 \text{ in}$ at a sensing range of 0 to 30 mm 0 to 1.181 in.



Typical FX-501 erformance (STD mode)

| | White | Black |
|--|--------------|--------------|
| FX-MR7 + FD-R33EG | 3,200 digits | 1,030 digits |
| FX-MR6 (compared to previous models) + FD-R33EG | 1,000 digits | 435 digits |

Zoom lens FX-MR8

Variable spot diameter

Spot diameters ranging from $\varnothing 0.4$ to $\varnothing 3.5 \text{ mm } \varnothing 0.016$ to $\varnothing 0.138 \text{ in}$ can be achieved by combining the lens with a variety of fibers.



All models

Tightening torque 5 times (compared to previous models)



















The standard aluminum body has been changed to stainless steel (SUS 303) to reduce the likelihood of damage from over-tightening.

Standard lens outer diameter of $\varnothing 4.3 \text{ mm } (\varnothing 0.169 \text{ in})$






















Use of the same mounting hardware across the product line means less inventory and lower costs.

LIST OF FIBERS

High precision fiber & spot lens

| Designation | Shape of head (mm) Dimensions | Spot diameter (mm in) (Note) | Distance to focal point (mm in) (Note) | Lens | | Applicable fibers | | | | | | | | |
|---|---|-------------------------------|--|-----------------------|---------------|---------------------|-----------------------------------|-----------------------|---------------|---------------|---------------|------|---------------|------|
| | | | | Model No. | Ambient temp. | Model No. | Fiber cable length ∞: Free-cut | Bending radius (mm) | Protection | Ambient temp. | Dimensions | | | |
| Finest spot lens |  | ∅0.1 ∅0.004 | 7±0.5 0.276±0.020 | FX-MR6 | -20 to +60 °C | FD-EG31 | 500 mm | R4 | IP40 | | -20 to +60 °C | P.59 | | |
| |  | ∅0.2 ∅0.008 | | | | FD-EG30 | | | | | | | -40 to +70 °C | P.58 |
| |  | ∅0.3 ∅0.012 | | | | Tough FD-42G | 2 m | R2 Bending durability | | | | | -55 to +80 °C | P.57 |
| |  | ∅0.4 ∅0.016 | | | | FD-42GW | | R1 | | | | | -40 to +60 °C | |
| |  | ∅0.5 ∅0.020 | | | | Tough FD-32G | 1 m | R2 Bending durability | | | | | -55 to +80 °C | P.56 |
| |  | ∅0.15 ∅0.006 | | | | FD-32GX | | R2 | | | | | -20 to +60 °C | P.59 |
| |  | ∅0.3 ∅0.012 | | | | FD-EG31 | 500 mm | R4 | | | | | -40 to +70 °C | P.58 |
| |  | ∅0.5 ∅0.020 | | | | FD-EG30 | | | | | | | -55 to +80 °C | P.57 |
| |  | ∅0.7 to ∅2.0 ∅0.028 to ∅0.079 | | | | FD-42G | 2 m | R2 Bending durability | | | | | -40 to +60 °C | P.56 |
| |  | ∅0.5 ∅0.020 | | | | FD-42GW | | R1 | | | | | -55 to +80 °C | |
|  | ∅0.5 ∅0.020 | Tough FD-32G | 1 m | R2 Bending durability | -40 to +60 °C | P.57 | | | | | | | | |
|  | ∅0.5 ∅0.020 | FD-32GX | | R2 | -55 to +80 °C | P.56 | | | | | | | | |
| Pinpoint spot lens |  | ∅0.5 ∅0.020 | 6±1 0.236±0.039 | FX-MR1 | -40 to +70 °C | Tough FD-42G | 2 m | R2 Bending durability | -55 to +80 °C | P.57 | | | | |
| |  | ∅0.5 ∅0.020 | 6±1 0.236±0.039 | FX-MR1 | -40 to +70 °C | FD-42GW | | R1 | -40 to +60 °C | | | | | |
| Zoom lens |  | ∅0.7 to ∅2.0 ∅0.028 to ∅0.079 | Approx. 18.5 to 43 Approx. 0.728 to 1.693 | FX-MR2 | -40 to +70 °C | Tough FD-42G | 2 m | R2 Bending durability | -55 to +80 °C | P.57 | | | | |
| |  | ∅0.7 to ∅2.0 ∅0.028 to ∅0.079 | Approx. 18.5 to 43 Approx. 0.728 to 1.693 | FX-MR2 | -40 to +70 °C | FD-42GW | | R1 | -40 to +60 °C | | | | | |
| Zoom lens (Side-view type) |  | ∅0.5 to ∅3.0 ∅0.020 to ∅0.118 | Approx. 13 to 30 Approx. 0.512 to 1.181 | FX-MR5 | -40 to +70 °C | Tough FD-42G | 2 m | R2 Bending durability | -55 to +80 °C | P.57 | | | | |
| |  | ∅0.5 to ∅3.0 ∅0.020 to ∅0.118 | Approx. 13 to 30 Approx. 0.512 to 1.181 | FX-MR5 | -40 to +70 °C | FD-42GW | | R1 | -40 to +60 °C | | | | | |

Square head type M3, Reflective type fiber & spot lens

| Type | Spot diameter (mm in) (Note) | Distance to focal point (mm in) (Note) | Lens | | Fiber | | | |
|---------------------|---------------------------------------|--|---|-----------|-------|--|---------------|---|
| | | | Shape (mm in) Dimensions | Model No. | Shape | Emitting fiber core (mm in) | Model No. | |
| Finest spot lens | ∅0.1 ∅0.004 approx. | 7 ± 0.5 0.276 ± 0.020 |  | FX-MR7 | P.68 |  | ∅0.125 ∅0.005 | FD-R33EG |
| | ∅0.15 ∅0.006 approx. | | | | |  | ∅0.125 ∅0.005 | FD-EG31 |
| | ∅0.2 ∅0.008 approx. | | | | |  | ∅0.175 ∅0.007 | FD-R34EG |
| | | | | | |  | ∅0.25 ∅0.010 | FD-R32EG |
| | ∅0.4 ∅0.016 approx. | | | | |  | ∅0.25 ∅0.010 | FD-EG30 |
| | | | | | |  | ∅0.5 ∅0.020 | FD-R31G |
| | | | | | |  | ∅0.5 ∅0.020 | FD-32G |
| | | | | | |  | ∅0.5 ∅0.020 | FD-32GX |
| | | | | | |  | ∅0.5 ∅0.020 | FD-42G |
| | | | | | |  | ∅0.5 ∅0.020 | FD-42GW |
| Zoom lens | ∅0.4 to ∅2.0 ∅0.016 to ∅0.079 approx. | 10 to 30 0.394 to 1.181 |  | FX-MR8 | P.68 |  | ∅0.125 ∅0.005 | FD-R33EG, FD-EG31 |
| | ∅0.4 to ∅2.2 ∅0.016 to ∅0.087 approx. | | | | |  | ∅0.175 ∅0.007 | FD-R34EG |
| | ∅0.5 to ∅2.5 ∅0.020 to ∅0.098 approx. | | | | |  | ∅0.25 ∅0.010 | FD-R32EG, FD-EG30 |
| | ∅0.8 to ∅3.5 ∅0.031 to ∅0.138 approx. | | | | |  | ∅0.5 ∅0.020 | FD-R31G, FD-32G, FD-32GX, FD-42G, FD-42GW |
| Parallel light lens | ∅4.0 ∅0.157 approx. | 0 to 30 0 to 1.181 |  | FX-MR9 | P.68 |  | ∅0.125 ∅0.005 | FD-R33EG, FD-EG31 |
| | | | | | |  | ∅0.175 ∅0.007 | FD-R34EG |
| | | | | | |  | ∅0.25 ∅0.010 | FD-R32EG, FD-EG30 |
| | | | | | |  | ∅0.5 ∅0.020 | FD-R31G, FD-32G, FD-32GX, FD-42G, FD-42GW |

Note: Spot diameter, distance to focal point and sensing range are specified for FX-500/FX-100 series.

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

New product introduction

Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No.

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers


FX-500 series

FX-100 series

INDEX

Narrow Beam

Since the beam is narrow, it has a feature by which it is not easily affected by surrounding obstacles even in long distances.



Applications

Detection of a transparent tube



Mapping of a wafer



Detection of a wafer



LIST OF FIBERS

Thru-beam type (one pair set)

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length Free-cut | Sensing range (mm in) (Note 1) | | | Beam axis dia. (mm) | Beam axis position/Inclination of beam axis | Protection | Ambient temp. | Dimensions |
|--------------------------|-------------------------------|--------------------------|---------------------|--------------------------------|--------------------------------|------------------------|--|---------------------|---|------------|---------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | | | |
| Narrow beam Side-view | Aperture angle 2° | Tough FT-KS40 | R2 | 2 m | STD (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) | 2,200 86.614 (Note 2) | ø2.2 | — | IP40 | -40 to +60 °C | P.51 |
| | | | | | HYPR (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | | | | | |
| | | | | | STD (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) | 2,200 86.614 (Note 2) | | | | | |
| | | | | | HYPR (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | | | | | |
| | Aperture angle 2° ø4 | Tough FT-KV40 | R2 | | | | | | | | | |
| | Aperture angle 2° ø4 | Tough FT-KV40W | R1 | | | | | | | | | |
| | Aperture angle 3° 1.5 x 2 | Tough FT-KV26 | R2 | | | | | | | | | |

Retroreflective type

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length Free-cut | Sensing range (mm in) (Note 1, 3) | | | Protection | Ambient temp. | Dimensions |
|----------------------------|---|--------------------------|--------------------------------------|--------------------------------|-----------------------------------|------------------------------|--|------------|---------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | |
| With polarizing filter | W5.2 x H9.5 x D16 W30 x H30 x D0.5 | Tough FR-Z50HW | R1 | 2 m | STD 100 to 990 3.937 to 38.976 | 100 to 1,400 3.937 to 55.118 | 100 to 550 3.937 to 21.654 | IP40 | -25 to +55 °C | P.55 |
| | | | HYPR 100 to 1,900 3.937 to 74.803 | | 100 to 1,200 3.937 to 47.244 | 100 to 830 3.937 to 32.677 | | | | |
| | | | STD 15 to 310 0.591 to 12.205 | | 15 to 460 0.591 to 18.110 | 15 to 200 0.591 to 7.874 | | | | |
| | | | HYPR 15 to 570 0.591 to 22.441 | | 15 to 410 0.591 to 16.142 | 15 to 360 0.591 to 14.173 | | | | |
| Wafer mapping | W7.5 x H2.2 x D11.2 Aperture angle 3° (emitter) W4 x H2 x D21.5 | Tough FR-KZ22E | R2 | | | | | | | |
| Narrow beam Top sensing | W5.2 x H9.5 x D21 W10.6 x H28 x D10.1 | Tough FR-KZ50H | R2 | | | | | | | |
| | W9.5 x H25 x D5.2 W28 x H10.6 x D10.1 | Tough FR-KZ50E | R2 | | | | | | | |

Reflective type

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length Free-cut | Sensing range (mm in) (Note1) | | | Protection | Ambient temp. | Dimensions |
|------------|--------------------------|--------------------------|---------------------|--------------------------------|-------------------------------------|-----------------------------|--|------------|---------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | |
| Long range | W5.2 x H9.5 x D16 | Tough FD-Z50HW | R1 | 2 m | STD 10 to 650 0.394 to 25.591 | 10 to 1,100 0.394 to 43.307 | 10 to 200 0.394 to 7.874 | IP40 | -40 to +60 °C | P.65 |
| | | | | | HYPR 10 to 2,500 0.394 to 98.425 | 10 to 1,000 0.394 to 39.370 | 10 to 530 0.394 to 20.866 | | | |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

2) The fiber cable length practically limits the sensing range.


3) The sensing range is the possible setting range for the attached reflector. The fiber can detect an object less than setting range for the reflector. Refer to P.27 or 38 for the sensing range when FR-Z50HW is used in combination with a reflector (optional).

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com


Wide Beam

■ Senses a workpiece with indefinite shape or position in the wide beam without missing. It can also be used to discriminate shape.



Applications

- Sensing tiny moving objects
- Inspecting screw height
- Control the amount of meandering
- Confirming presence of slit mask

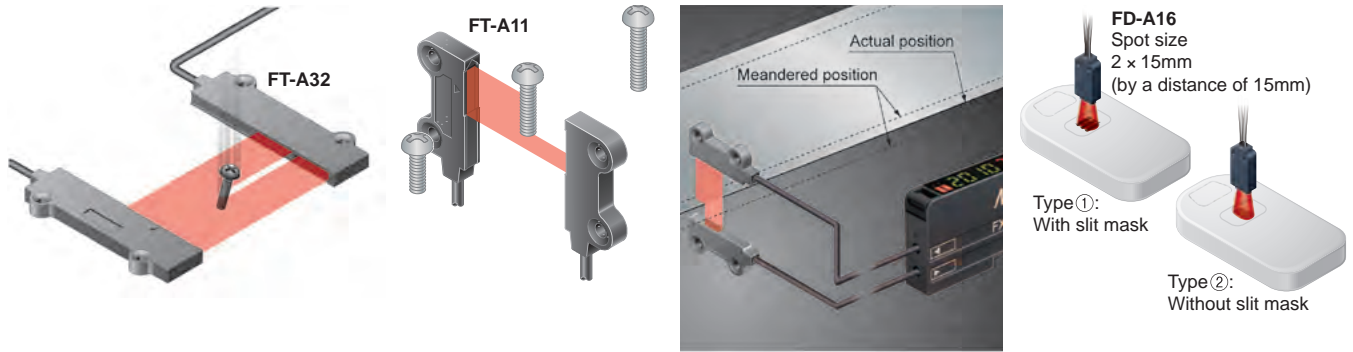

LIST OF FIBERS

Thru-beam type (one pair set)

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length ✂️: Free-cut | Sensing range (mm in) (Note 1) | | | Beam axis dia. (mm) | Protection | Ambient temp. | Dimensions |
|-----------|--|-----------------------------|-----------------------------|------------------------------------|--------------------------------|-------------------------|--|---------------------|------------|---------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | | |
| Wide beam | Sensing width 32mm W5 x H69 x D20 | Tough FT-A32 | R2 Bending durability | 2 m | STD (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3.2 x 32 | IP40 | -40 to +60 °C | P.49 |
| | | | HYPR (Note 2) 3,600 141.732 | | 3,600 141.732 (Note 2) | | | | | | |
| | | STD (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) | | 3,600 141.732 (Note 2) | -40 to +55 °C | | | | | |
| | | HYPR (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) | | | | | | | | |
| | Sensing width 11mm W4.2 x H31 x D13.5 | Tough FT-A11 | R2 Bending durability | STD (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 2.2 x 11 | -40 to +70 °C | | | |
| | | | HYPR (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) | | | | | | | |
| | Sensing width 11mm W4.2 x H31 x D13.5 | | R1 | STD (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) | 1,700 66.929 | -40 to +55 °C | | | | |
| | | | HYPR (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) | | | | | | | |
| Array | Sensing width 5.5mm W5 x H15 x D15 | Tough FT-AL05 | R2 Bending durability | STD 860 33.858 | 1,550 61.024 1,500 59.055 | 250 9.843 660 25.984 | 0.25 x 5.5 | -55 to +80 °C | | | |
| | | | HYPR 2,300 90.551 | 500 19.685 170 6.693 | | | | | | | |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
 2) The fiber cable length practically limits the sensing range.

Reflective type

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length ✂️: Free-cut | Sensing range (mm in) (Note 1, 2) | | | Protection | Ambient temp. | Dimensions |
|-----------|--------------------------|-------------------------|--------------------------|------------------------------------|-----------------------------------|-------------------------|--|------------|---------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | |
| Wide beam | W7 x H15 x D30 | Tough FD-A16 | R4 Bending durability | 2 m | STD 200 7.874 | 200 7.874 | 120 4.724 240 9.449 | IP40 | -40 to +60 °C | P.58 |
| | | | HYPR Cannot use | | 140 5.512 75 2.953 | | | | | |
| Array | W5 x H20 x D20 | Tough FD-AL11 | R2 Bending durability | STD 320 12.598 | 530 20.866 510 20.079 | 100 3.937 285 11.220 | -55 to +80 °C | | | |
| | | | HYPR 670 26.378 | 180 7.087 50 1.969 | | | | | | |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
 2) The sensing range is specified for white non-glossy paper.

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot

Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others


Amplifiers

FX-500 series
FX-100 series

INDEX


Convergent Reflective Type

It is a fiber in which the sensing distance is limited to a specific range so it is not easily affected by the background. It is effective when a workpiece is accumulated or when the background is near.

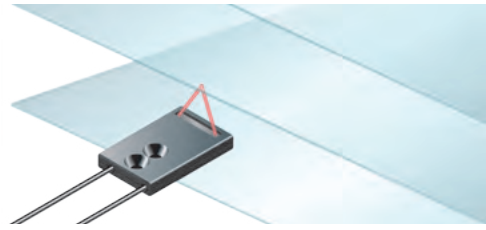


Applications


Detecting a passing glass

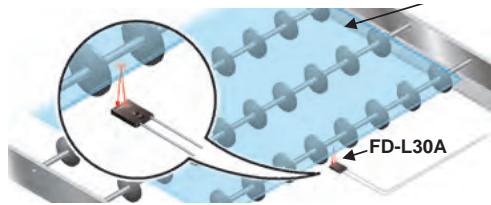

LCD transportation

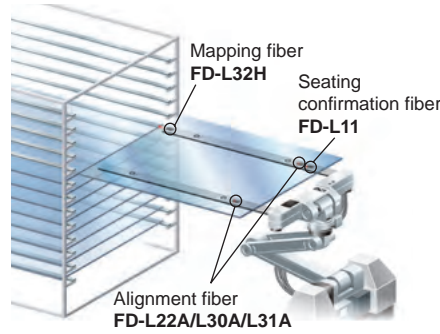













Mounting in handling arms



LIST OF FIBERS

Reflective type


| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length (m) | Sensing range (mm in) (Note 1, 2) | | | Protection | Ambient temp. | Dimensions |
|--|---|--------------------------------|------------------------------------|--|---|--|--|------------|---------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | |
| Glass substrate detection | Mapping  W25 x H7.3 x D30 | FD-L32H | R4 Bending durability |  4 m | STD 0 to 56 0 to 2.205 HYPR 0 to 110 0 to 4.331 | 0 to 87 0 to 3.425 0 to 74 0 to 2.913 1 to 38 0.039 to 1.496 Cannot use | 16 to 30 0.630 to 1.181 0 to 50 0 to 1.969 | IP40 | -40 to +60 °C | P.63 |
| | Alignment  W20 x H29 x D3.8 | Tough FD-L30A | R2 Bending durability | 3 m | STD 0 to 43 0 to 1.693 HYPR 0 to 43 0 to 1.693 | 0 to 43 0 to 1.693 0 to 42 0 to 1.654 0 to 29 0 to 1.142 | 0 to 40 0 to 1.575 0 to 50 0 to 1.969 | | | |
| | Alignment  W23.5 x H29 x D4.5 | Tough FD-L31A | R4 Bending durability | 3 m | STD 4 to 33 0.157 to 1.299 HYPR 3 to 35 0.118 to 1.378 | 4 to 33 0.157 to 1.299 4 to 33 0.157 to 1.299 4 to 32 0.157 to 1.260 5 to 25 0.197 to 0.984 | 5 to 30 0.197 to 1.181 4 to 33 0.157 to 1.299 | | | |
| | Alignment  W17 x H29 x D3.8 | Tough FD-L22A | R2 Bending durability | 2 m | STD 0 to 24 0 to 0.945 HYPR 0 to 31 0 to 1.220 | 0 to 28 0 to 1.102 0 to 27 0 to 1.063 0 to 24 0 to 0.945 0 to 18 0 to 0.709 | 0 to 19 0 to 0.748 0 to 25 0 to 0.984 | | | |
| | Seating confirmation  W18 x H29 x D3.8 | Tough FD-L23 | Bending durability | 3 m | STD 0 to 29 0 to 1.142 HYPR 0 to 30 0 to 1.181 | 0 to 30 0 to 1.181 0 to 30 0 to 1.181 0 to 28 0 to 1.102 1.5 to 24 0.059 to 0.945 | 0 to 28 0 to 1.102 0 to 30 0 to 1.181 | | | |
| | Seating confirmation  W12 x H19 x D3 | Tough FD-L11 | R4 Bending durability | 2 m | STD 0 to 9.5 0 to 0.374 HYPR 0 to 11.5 0 to 0.453 | 0 to 10.5 0 to 0.413 0 to 10 0 to 0.394 0 to 9 0 to 0.354 0 to 8 0 to 0.315 | 0 to 8 0 to 0.315 0 to 9 0 to 0.354 | | | |
| | Seating confirmation  W12 x H19 x D3 | Tough FD-L10 | Bending durability | | STD 0 to 5 0 to 0.197 HYPR 0 to 6 0 to 0.236 | 0 to 5.5 0 to 0.217 0 to 5.5 0 to 0.217 0 to 4.5 0 to 0.177 0 to 4 0 to 0.157 | 0 to 4.5 0 to 0.177 0 to 5.5 0 to 0.217 | | | |
| |  W24 x H21 x D4 | Tough FD-L21 | R2 Bending durability | | STD 1.5 to 16 0.059 to 0.630 HYPR 1 to 19 0.039 to 0.748 | 1 to 18 0.039 to 0.709 1 to 18 0.039 to 0.709 2 to 15 0.079 to 0.591 3 to 12 0.118 to 0.472 | 3 to 15 0.118 to 0.591 1.5 to 16 0.059 to 0.630 | | | |
| |  W24 x H21 x D4 | FD-L21W | R1 | | STD 3 to 14 0.118 to 0.551 HYPR 1.5 to 15 0.059 to 0.591 | 2 to 15 0.079 to 0.591 2 to 15 0.079 to 0.591 4 to 14 0.157 to 0.551 6.5 to 10 0.256 to 0.394 | 7 to 12 0.276 to 0.472 3 to 14 0.118 to 0.551 | | | |
| | General purpose  W6 x H18 x D14 | Tough FD-L20H | R2 Bending durability | STD 23 0.906 HYPR 45 1.772 | 35 1.378 32 1.260 2 to 15 0.079 to 0.591 5 to 9 0.197 to 0.354 | 5 to 15 0.197 to 0.591 1 to 30 0.039 to 1.181 | IP30 | | | |
| Ultra-small  W7.2 x H7.5 x D2 | FD-L12W | R1 | STD 8 0.315 HYPR 14 0.551 | 12.5 0.492 12 0.472 0.5 to 7 0.020 to 0.276 0.5 to 4 0.020 to 0.157 | 1 to 4.5 0.039 to 0.177 0.5 to 7 0.020 to 0.276 | | | | | |

Notes: 1) The sensing range is specified for transparent glass 100 × 100 × t0.7 mm 3.937 × 3.937 × t0.028 in (FD-L32H: R edge, FD-L21 and FD-L21W: t2 mm 0.079 in) (FD-L20H: white non-glossy paper, FD-L10: silicon wafers 100 × 100 mm 3.937 × 3.937 in).
2) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.
Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com


Retroreflective Type

Compared with the thru-beam type, it is easier to arrange the fibers since one side is a reflector. Sensing transparent objects is also its advantage.




Applications


Detecting transparent film

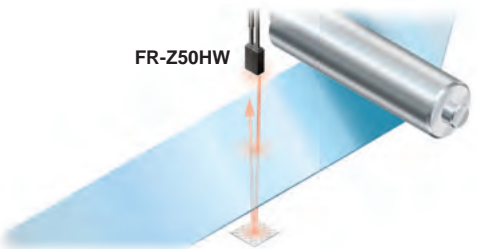

Detecting wafers



Detecting transparent seals on transparent sheet

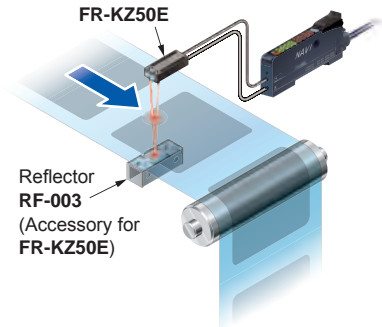

LIST OF FIBERS

Retroreflective type

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length Free-cut | Sensing range (mm in) (Note 1, 2) | | | Protection | Ambient temp. | Dimensions |
|-------------------------|--|----------------------------------|---------------------|--------------------------------|-----------------------------------|--|---|------------|---------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | |
| With polarizing filters | W5.2 x H9.5 x D16 W30 x H30 x D0.5 | FR-Z50HW | R1 | 2 m | STD 100 to 990 3.937 to 38.976 | 100 to 1,400 3.937 to 55.118 | 100 to 550 3.937 to 21.654 | IP40 | -25 to +55 °C | P.55 |
| | | | | | HYPR 100 to 1,900 3.937 to 74.803 | 100 to 1,200 3.937 to 47.244 100 to 780 3.937 to 30.709 100 to 490 3.937 to 19.291 | 100 to 830 3.937 to 32.677 | | | |
| Wafer mapping | W7.5 x H2.2 x D11.2 W4 x H2 x D21.5 | Tough FR-KZ22E | R2 | 2 m | STD 15 to 310 0.591 to 12.205 | 15 to 460 0.591 to 18.110 15 to 410 0.591 to 16.142 15 to 220 0.591 to 8.661 15 to 100 0.591 to 3.937 | 15 to 200 0.591 to 7.874 15 to 360 0.591 to 14.173 | IP30 | -40 to +60 °C | P.55 |
| | | | | | HYPR 15 to 570 0.591 to 22.441 | | | | | |
| Narrow beam | W5.2 x H9.5 x D21 W10.6 x H28 x D10.1 W9.5 x H25 x D5.2 W28 x H10.6 x D10.1 | Tough FR-KZ50H Tough FR-KZ50E | R2 | 2 m | STD 20 to 300 0.787 to 11.811 | 20 to 800 0.787 to 31.496 20 to 400 0.787 to 15.748 20 to 200 0.787 to 7.874 20 to 200 0.787 to 7.874 | 20 to 200 0.787 to 7.874 20 to 350 0.787 to 13.780 | IP30 | -40 to +60 °C | P.55 |
| | | | | | HYPR 20 to 1,000 0.787 to 39.370 | | | | | |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The sensing range is the possible setting range for the attached reflector. The fiber can detect an object less than setting range for the reflector.

Sensing range when FR-Z50HW is used in combination with a reflector (optional)

| Reflector model No. | Sensing range (mm in) | | | | | | | |
|---------------------|-----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|---------------------------------|---------------------------------|----------------------------------|
| | FX-500 series | | | | | | FX-101 | FX-102 |
| | HYPR | U-LG | LONG | STD | FAST | H-SP | | |
| RF-230 | 100 to 19,000 3.937 to 748.030 | 100 to 8,000 3.937 to 314.960 | 100 to 5,000 3.937 to 196.850 | 100 to 3,600 3.937 to 141.732 | 100 to 2,900 3.937 to 114.173 | 100 to 1,400 3.937 to 55.118 | 100 to 2,400 3.937 to 94.488 | 100 to 5,000 3.937 to 196.850 |
| RF-220 | 100 to 8,000 3.937 to 314.960 | 100 to 4,700 3.937 to 185.039 | 100 to 3,500 3.937 to 137.795 | 100 to 3,000 3.937 to 118.110 | 100 to 1,800 3.937 to 70.866 | 100 to 830 3.937 to 32.677 | 100 to 1,300 3.937 to 51.181 | 100 to 2,600 3.937 to 102.362 |
| RF-210 | 100 to 5,500 3.937 to 216.535 | 100 to 2,700 3.937 to 106.299 | 100 to 2,400 3.937 to 94.488 | 100 to 1,500 3.937 to 59.055 | 100 to 1,200 3.937 to 47.244 | 100 to 530 3.937 to 20.866 | 100 to 980 3.937 to 38.583 | 100 to 1,300 3.937 to 51.181 |

Note: The sensing range of retroreflective type is the possible setting range for the attached reflector. The fiber can detect an object less than 100 mm 3.937 in. However, note that if there are any white or highly-reflective surfaces near the fiber head, reflected incident light may affect the fiber head. If this occurs, adjust the threshold value of the amplifier unit before use.

FIBER OPTION

Reflectors (for FR-Z50HW) ▶ P.45



Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.
Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options
Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series

INDEX

Chemical / Oil-resistant



- With the case and fiber sheath made of PFA, the fiber can be used with various types of chemical liquids.
- The fiber core will not harden or break, even in environments where oil is present.

Full-protection type

FT-R60Y (Square head type M6 / thru-beam type)

High environmental resistance



The head, nut, and washer are made from rust-resistant SUS304. The unbreakable tough fiber with high durability is covered in a fluorine resin tube. The fiber head is also covered with a fluorine resin component, achieving a high level of environmental resistance.

Less susceptibility to oil adhesion thanks to fluorine resin

Fibers deliver stable detection, since the sensing part is sealed with fluorine resin, which does not allow oil penetration. Additionally, the detection part features a convex design made of fluorine resin, achieving lower friction than glass.

Resistant to oil and coolant

The fiber head and fiber cable are connected by the “fastening and caulking” method without using adhesives. This method eliminates concerns that adhesives will absorb moisture in high-humidity environments and damage the fiber. The enclosure achieves IP68G protection, so the fiber can be installed around metal processing machines shrouded in the oil mist.



| Test oil | Product |
|---------------------------------|------------------------------|
| Lubricating oil | Velocite Oil No. 3 |
| Non-water-soluble cutting oil | Yushiron Cut Abas KZ201 |
| | Yushiron Cut UH75 |
| Water-soluble cutting oil | Syntilo 9954 (10% diluted) |
| | Yushiroken S50N (2% diluted) |
| Alcohol-based neutral detergent | Super Teepol |



*Yushiron and Yushiroken are registered trademarks of Yushiro Chemical Industry Co., Ltd.

Cable-protection type

FT-R44Y / FD-R61Y

FT-R44Y (Square head type M4 / thru-beam type)

FD-R61Y (Square head type M6 / reflective type)

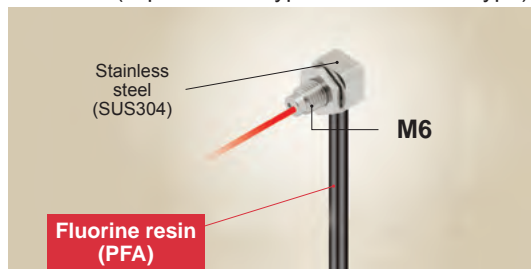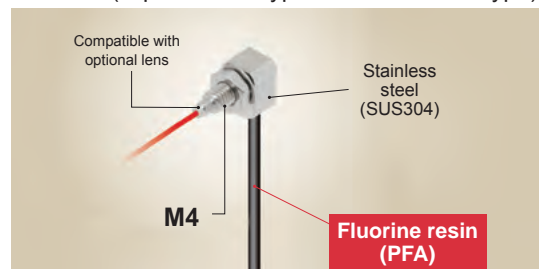

Full-protection type

FD-S60Y (Cylindrical type / reflective type) Metal-free

Metal-free design



Since no metal components are used, there is no need to worry about metal contamination, even if the protective tube is damaged. It is ideal for use in applications such as semiconductor front-end equipment where a clean environment is required.

Detection in long range and narrow view

A built-in lens achieves narrow-view detection with an aperture angle of 30 degrees.

Improved tip flexibility

The protective tube features a bending radius of R30 mm **R1.181 in**, which improved the cable arrangement compared to previous (R40 mm **R1.575 in**) designs.

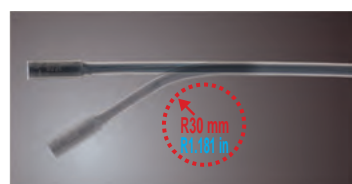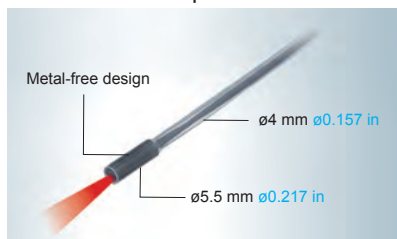

LIST OF FIBERS

Thru-beam type (one pair set)

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length (mm) Free-cut | Sensing range (mm in) (Note 1) | | | Beam axis dia. (mm) | Protection | Ambient temp. | Dimensions | |
|--------------------|--|---|---------------------|-------------------------------------|--|--|---|-------------------------------|---------------|---------------|----------------|------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | | | |
| Oil-resistant | Square head type M4 Cable-protection type Compatible with lens W7×H9.5×D15.5 | Tough NEW FT-R44Y | R4 | 2 m | STD 720 28.346 HYPR 3,000 118.110 | 1,600 62.992 1,100 43.307 430 16.929 130 5.118 | 210 8.268 640 25.197 | ø1 | IP67 (Note 4) | -55 to +80 °C | P.52 | |
| | Full-protection type W10×H11×D21.2 | Tough NEW FT-R60Y | R4 | 2 m | STD 2,100 82.677 HYPR (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 1,260 49.606 400 15.748 | 690 27.165 1,890 74.409 | ø3.5 | | -55 to +80 °C | | |
| Chemical-resistant | Flat type Easy mounting • Rectangular head SEMI S2 compliant W7 × H15 × D13 Metal-free | Tough FT-Z802Y | R4 | 2 m | STD 3,100 122.047 HYPR (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 1,900 74.803 470 18.504 | 520 20.472 3,100 122.047 | | | 0 to +60 °C | P.54 | |
| | Cylindrical type | Heat-resistant 115 °C Metal-free ø5.5 -(25)- | FT-HL80Y | R30 | 2 m (Note 3) | STD (Note 2) 3,600 141.732 HYPR (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 2,300 90.551 740 29.134 | 990 38.976 2,340 92.126 | ø3.7 | IP68G | -40 to +115 °C | P.50 |
| | | Metal-free ø5.5 -(25)- | FT-L80Y | | | STD (Note 2) 3,600 141.732 HYPR (Note 2) 3,600 141.732 | 3,600 141.732 (Note 2) 3,600 141.732 (Note 2) 2,800 110.236 920 36.220 | 1,100 43.307 2,600 102.362 | | | | P.51 |
| | | Side-view Metal-free ø5.5 -(25)- | FT-V80Y | | | STD 1,300 51.181 HYPR (Note 2) 3,600 141.732 | 2,800 110.236 2,200 86.614 800 31.496 240 9.449 | 340 13.386 800 31.496 | | | | ø2.8 |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
 2) The fiber cable length practically limits the sensing range.
 3) The allowable cutting range is 500 mm 19.685 in from the end that the amplifier inserted.
 4) The fiber part is oil-resistant.


Reflective type

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length (mm) Free-cut | Sensing range (mm in) (Note 1, 2) | | | Beam axis dia. (mm) | Protection | Ambient temp. | Dimensions |
|--------------------|---|------------------------------------|---------------------|-------------------------------------|-----------------------------------|---|--|---------------------|---------------|---------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | | |
| Oil-resistant | Square head type M6 Cable-protection type W10×H11×D15.5 | Tough NEW FD-R61Y | R4 | 2 m | STD 280 11.024 HYPR 990 38.976 | 610 24.016 435 17.126 160 6.299 50 1.969 | 85 3.346 185 7.283 | — | IP67 (Note 3) | -55 to +80 °C | P.63 |
| Chemical-resistant | Cylindrical type Metal-free ø5.5 -(16)- | Tough NEW FD-S60Y | R4 | 2 m (Note 4) | STD 320 12.598 HYPR 600 23.622 | 590 23.228 420 16.535 200 7.874 75 2.953 | 140 5.512 300 11.811 | — | IP68G | -40 to +70 °C | P.64 |


Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending on how the fiber is cut.
 2) The sensing range is specified for white, non-glossy paper.
 3) The fiber part is oil-resistant.
 4) The allowable cutting range is 500 mm 19.685 in from the end that is inserted to the amplifier.

Applications


Detecting wafer cassette in cleaning tank

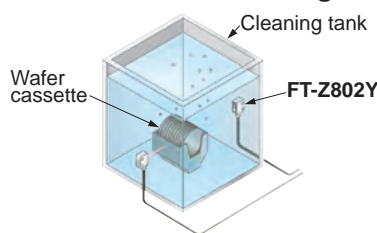

Sensing a wafer in corrosive environment

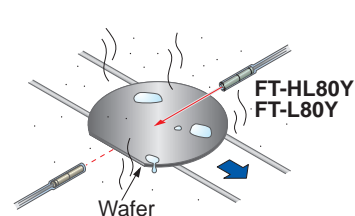

Detecting a container at a chemical Piller



Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm R0.394 in, reciprocating bending: 180°) and more flexible (bending radius: R4 mm R0.157 in or less) features.
 Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

New product introduction

Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No.

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers

FX-500 series

FX-100 series

INDEX

New product introduction
Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers

FX-500 series

FX-100 series

INDEX

Heat-resistant




- It can be used under environments of -60 to +350 °C
-76 to +662 °F.
- A joint type for wider workability is also available.



Applications

IC detection within a high temperature handler

Detecting glass substrates




LIST OF FIBERS

Thru-beam type (one pair set)

| Type | Heat-resistant temp. | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length ✂️: Free-cut | Sensing range (mm in) (Note 1) | | | Beam axis dia. (mm) | Ambient temp. | Dimensions | | | | |
|------------------------|----------------------------------|--|------------------------|----------------------------------|------------------------------------|--------------------------------|---------------------|--|---------------------|----------------|------------|----------------------------|--------------|------------|------------|
| | | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | | | | | |
| Heat-resistant | 350 °C | Lens mountable (FX-LE1/LE2/SV1) | FT-H35-M2 | R25 | 2 m | STD 430 16.929 | 880 34.646 | 170 6.693 | ø1.2 | -60 to +350 °C | P.50 | | | | |
| | | Sleeve 60 mm | FT-H35-M2S6 | Fiber R25 Sleeve R10 | | HYPR 1,200 47.244 | 670 26.378 | 490 19.291 | | | | 250 9.843 | 80 3.150 | | |
| | 200 °C | Allows flexible wiring Lens mountable (FX-LE1/LE2/SV1) | FT-H20W-M1 | R10 | 1 m | STD 470 18.504 | 1,000 39.370 | 100 3.937 | ø0.8 | -60 to +200 °C | | | | | |
| | | Lens mountable (FX-LE1/LE2/SV1) | FT-H20-M1 | R25 | | HYPR (Note 2) 1,600 62.992 | 840 33.071 | 300 11.811 | | | | 300 11.811 | 90 3.543 | | |
| 130 °C | Lens mountable (FX-LE2 only) | FT-H13-FM2 | R25 | 2 m | STD 540 21.260 | 1,300 51.181 | 210 8.268 | ø1.2 | -60 to +130 °C | P.49 | | | | | |
| | | | | | HYPR (Note 2) 1,600 62.992 | 960 37.795 | 330 12.992 | | | | 540 21.260 | 110 4.331 | | | |
| Heat-resistant (joint) | 200 °C | Lens mountable (FX-LE1/LE2/SV1) | FT-H20-J20-S (Note 5) | Heat-resistant side R18 (Note 4) | ✂️ 200 mm (Note 3) | STD 470 18.504 | 1,000 39.370 | 135 5.315 | ø1.2 | -60 to +200 °C | P.50 | | | | |
| | | | FT-H20-J30-S (Note 5) | | ✂️ 300 mm (Note 3) | | | | | | | HYPR 1,600 62.992 | 790 31.102 | 300 11.811 | 90 3.543 |
| | | | FT-H20-J50-S (Note 5) | | ✂️ 500 mm (Note 3) | | | | | | | STD 600 23.622 | 1,300 51.181 | 150 5.906 | |
| | | Side-view | FT-H20-VJ50-S (Note 5) | | ✂️ 800 mm (Note 3) | | | | | | | HYPR (Note 2) 2,100 82.677 | 980 38.583 | 390 15.354 | 500 19.685 |
| | | | FT-H20-VJ80-S (Note 5) | | | | | | | | | | | | |

- Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
 2) The fiber cable length practically limits the sensing range.
 3) Fiber length (fixed-length) for heat-resistant fiber side. Fiber length for ordinary temperature side is 2 m 6.562 ft (free-cut).
 4) Bending durable fiber R4 mm R0.157 in or more for ordinary temperature side.
 5) Heat-resistant joint fibers and ordinary-temperature fibers (FT-42) are sold as a set.

Heat-resistant joint fiber set contents

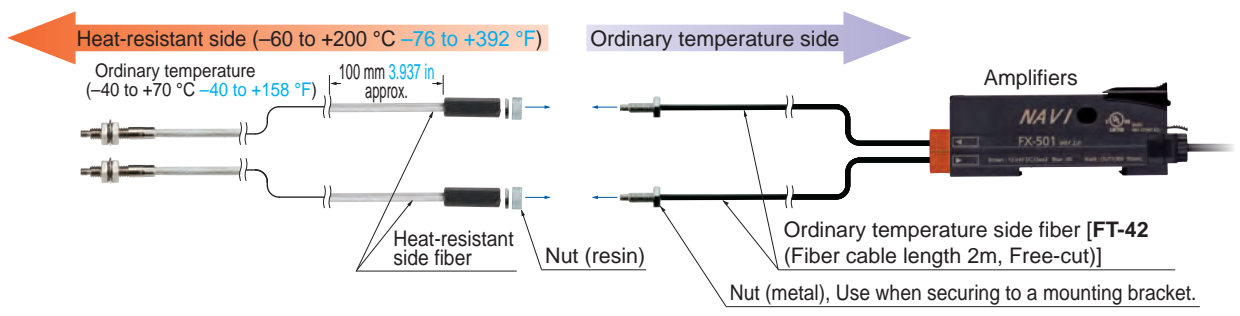

Model No. when ordering individually as spare parts

- Heat-resistant side fiber **one pair set**
 FT-H20-J20, FT-H20-J30, FT-H20-J50, FT-H20-VJ50, FT-H20-VJ80
- Ordinary temperature side fiber **one pair set**
 FT-42

LIST OF FIBERS


Reflective type

| Type | Heat-resistant temp. | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length ✂: Free-cut | Sensing range (mm in) (Note 1, 2) | | | Ambient temp. | Dimensions | |
|----------------|---|----------------------------------|------------------|---------------------|-----------------------------------|-----------------------------------|--|--|--|--|------|
| | | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | |
| Heat-resistant | 350 °C | Coaxial M6 25 | FD-H35-M2 | R25 | 2 m | STD 260 10.236 | 540 21.260 | 75 2.953 | -60 to +350 °C | P.61 | |
| | | Sleeve 60 mm M6 ø2.8 22 | FD-H35-M2S6 | Fiber R25 | | HYPR 720 28.346 | 460 18.110 150 5.906 45 1.772 | | | | |
| | | Sleeve 90 mm M4 ø2.1 27 | FD-H35-20S | Sleeve R10 | | STD 260 10.236 | 550 21.654 440 17.323 140 5.512 45 1.772 | | | | |
| | 200 °C | Coaxial M6 28 | FD-H20-M1 | R25 | 1 m | STD 330 12.992 | 550 21.654 500 19.685 200 7.874 55 2.165 | 120 4.724 300 11.811 | -60 to +200 °C | P.60 | |
| | | Coaxial M4 27 | FD-H20-21 | | | HYPR 840 33.071 | 500 19.685 380 14.961 130 5.118 45 1.772 | | | | |
| | 130 °C | Coaxial M6 21 | FD-H13-FM2 | R25 | 2 m | ✂ | STD 350 13.780 | 640 25.197 600 23.622 200 7.874 65 2.559 | 100 3.937 280 11.024 | -60 to +130 °C | |
| | Glass substrate detection convergent reflective | 300 °C | W19 x H27 x D5 | FD-H30-L32 | R25 | 2 m | STD 17 0.669 | 30 1.181 25 0.984 12 0.472 | 2 to 9 0.079 to 0.354 0 to 17 | -60 to +300 °C | P.61 |
| | | | W21 x H33.2 x D5 | FD-H25-L43 | HYPR 40 1.575 | | 1.5 to 26 0.059 to 1.024 1.5 to 24 0.059 to 0.945 2 to 18 0.079 to 0.709 | 4 to 16 0.157 to 0.630 4 to 23 | | | |
| | | 250 °C | W21 x H34.5 x D5 | FD-H25-L45 | R25 | 3 m | STD 5 to 42 0.197 to 1.654 | 4 to 43 0.157 to 1.693 4.5 to 43 0.177 to 1.693 5 to 40 0.197 to 1.575 4 to 43.5 0.157 to 1.713 | 7 to 35 0.276 to 1.378 7 to 38 0.276 to 1.496 | -20 to +250 °C (Ordinary temp. side: -20 to +70 °C) | P.60 |
| | | | W19 x H27 x D5 | FD-H18-L31 | ✂ | | STD 16 0.630 | 32 1.260 24 0.945 13 0.512 | 0 to 10 0 to 0.394 0 to 25 | | |
| 180 °C | W19 x H27 x D5 | FD-H18-L31 | R25 | 2 m | ✂ | HYPR 60 2.362 | 2 to 6.5 0.079 to 0.256 | 0 to 25 0 to 0.984 | -60 to +180 °C | | |

Notes: 1) The sensing range of reflective type is the value for white non-glossy paper (50 × 50 mm 1.969 × 1.969 in glass substrate for FD-H30-L32, FD-H18-L31, transparent glass 100 × 100 × 0.7 mm 3.937 × 3.937 × 0.028 in for FD-H25-L43 and FD-H25-L45).
 2) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

FIBER OPTION

Lens (For thru-beam type fiber) ▶ P.42



New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type

Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type

Others
Amplifiers
FX-500 series
FX-100 series



INDEX

Vacuum-resistant

- Usable in high-temperatures of 300 °C 572 °F vacuum
- The leakage of **FV-BR1** is still less than a very slight $1.33 \times 10^{-10} \text{ Pa} \cdot \text{m}^3/\text{s} [\text{He}]$, so that it can be used in vacuums with confidence.


Applications

Detecting an FPD in vacuum chamber

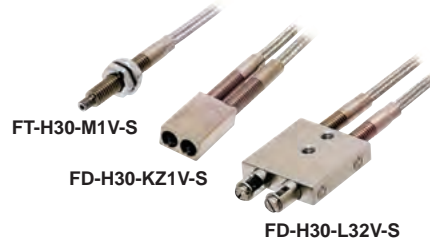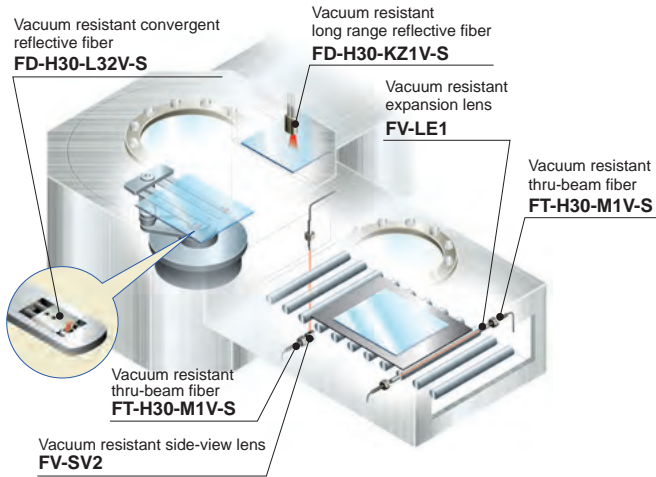


Highly resistant to repeated bending

Because it has a bending durability of over 100,000 times (R20 mm **R0.787 in**), it is highly resistant to repeated bending and is optimal for mounting on moving robot hand.





LIST OF FIBERS

Thru-beam type (one pair set)

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length | Sensing range (mm in) | | | Beam axis dia. (mm) | Ambient temp. | Dimensions |
|----------------------------|--|----------------------------|---------------------|--------------------|---|---|---|---------------------|----------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | | |
| Vacuum-resistant Thru-beam | 300 °C Lens mountable (FV-LE1/SV2) M4  | FT-H30-M1V-S (Note) | R18 | 1 m | STD 270 10.630 HYPR 1,000 39.370 | 590 23.228 470 18.504 160 6.299 55 2.165 | 110 4.331 280 11.024 | ø1.2 | -30 to +300 °C | P.50 |

Note: Sold as a set comprising vacuum type fiber + photo-terminal (**FV-BR1**) + fiber at atmospheric side (**FT-J8**).


Reflective type

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length | Sensing range (mm in)(Note 2) | | | Ambient temp. | Dimensions |
|--|--|-------------------------------|---------------------|--------------------|---|---|---|----------------|------------|
| | | | | | FX-500 series | U-LG LONG FAST H-SP | FX-101 (Upper value) FX-102 (Lower value) | | |
| Vacuum-resistant Reflective | 300 °C, Rectangular head  W9.5 x H5.2 x D15 | FD-H30-KZ1V-S (Note 1) | R18 | 1 m | STD 20 to 200 0.787 to 7.874 HYPR 5 to 500 0.197 to 19.685 | 10 to 340 0.394 to 13.386 15 to 270 0.591 to 10.630 20 to 120 0.787 to 4.724 20 to 45 0.787 to 1.772 | 25 to 80 0.984 to 3.150 10 to 220 0.394 to 8.661 | -30 to +300 °C | P.61 |
| Vacuum-resistant Convergent reflective | 300 °C, Glass substrate detection  W19 x H5 x D27 | FD-H30-L32V-S (Note 1) | R18 | 3 m | STD 8 0.315 HYPR 18 0.709 | 12 0.472 10 0.394 5.5 0.217 1.5 to 3 0.059 to 0.118 | 2.5 to 6.5 0.098 to 0.256 0 to 11 0 to 0.433 | -30 to +300 °C | P.61 |

Notes: 1) Sold as a set comprising vacuum type fiber + photo-terminal (**FV-BR1**) + fiber at atmospheric side (**FT-J8**).


2) The sensing range of reflective type is the value for transparent glass 100 x 100 x 0.7 mm **3.937 x 3.937 x 0.028 in**.

Vacuum-resistant fiber set contents

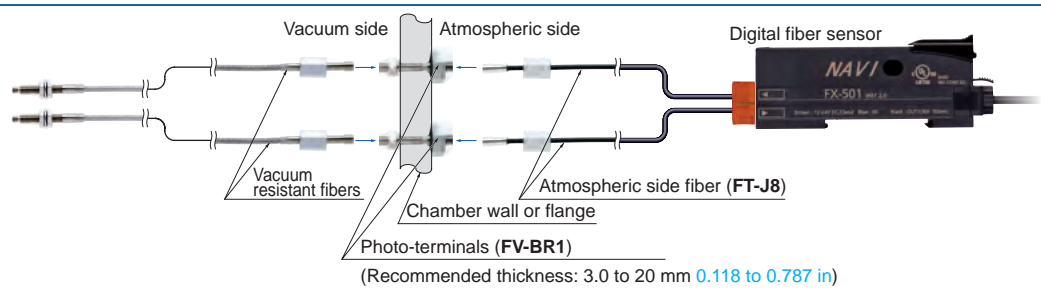



Model No. when ordering individually as spare parts

- Vacuum resistant fiber
FT-H30-M1V (one pair set)
FD-H30-KZ1V
FD-H30-L32V
- Photo-terminal
FV-BR1 (one pair set)
- Atmospheric side fiber
FT-J8 (one pair set)
- Mounting bracket for **FD-H30-KZ1V(-S)**
MS-FD-2




FIBER OPTIONS

Lens (For thru-beam fiber)

| Designation | Model No. | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|--|---------------|---------------|----------|----------|----------|---------------|---------------|---------------|---------------|----------|----------|----------|----------|----------|------|------|------|--------|--------|--------------|--------------|---------|---------|---------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| For thru-beam type fiber | Vacuum resistant expansion lens (Note 1) FV-LE1 |  <p>Increases the sensing range 4 times or more. • Ambient temperature: -60 to +350 °C -76 to +662 °F (Note 3) • Beam axis dia: \varnothing3.6 mm \varnothing0.142 in Sensing range (mm in) [Lens on both sides] (Note 4)</p> <table border="1"> <thead> <tr> <th rowspan="2">Amplifier</th> <th colspan="7">FX-500 series</th> <th colspan="2">FX-100 series</th> </tr> <tr> <th>Fiber</th> <th>Mode</th> <th>HYP</th> <th>U-LG</th> <th>LONG</th> <th>STD</th> <th>FAST</th> <th>H-SP</th> <th>FX-101</th> <th>FX-102</th> </tr> </thead> <tbody> <tr> <td rowspan="2">FT-H30-M1V-S</td> <td>3,600</td> <td>141.732</td> <td>3,600</td> <td>141.732</td> <td>3,400</td> <td>133.858</td> <td>1,500</td> <td>59.055</td> <td>900</td> <td>35.433</td> <td>370</td> <td>14.567</td> <td>450</td> <td>17.717</td> <td>1,600</td> <td>62.992</td> </tr> <tr> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> </tr> </tbody> </table> | Amplifier | FX-500 series | | | | | | | FX-100 series | | Fiber | Mode | HYP | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | FT-H30-M1V-S | 3,600 | 141.732 | 3,600 | 141.732 | 3,400 | 133.858 | 1,500 | 59.055 | 900 | 35.433 | 370 | 14.567 | 450 | 17.717 | 1,600 | 62.992 | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) |
| | Amplifier | FX-500 series | | | | | | | FX-100 series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fiber | | Mode | HYP | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FT-H30-M1V-S | 3,600 | 141.732 | 3,600 | 141.732 | 3,400 | 133.858 | 1,500 | 59.055 | 900 | 35.433 | 370 | 14.567 | 450 | 17.717 | 1,600 | 62.992 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Vacuum resistant side-view lens (Note 1) FV-SV2 |  <p>Beam axis is bent by 90°. • Ambient temperature: -60 to +300 °C -76 to +572 °F (Note 3) • Beam axis dia: \varnothing3.7 mm \varnothing0.146 in Sensing range (mm in) [Lens on both sides] (Note 4)</p> <table border="1"> <thead> <tr> <th rowspan="2">Amplifier</th> <th colspan="7">FX-500 series</th> <th colspan="2">FX-100 series</th> </tr> <tr> <th>Fiber</th> <th>Mode</th> <th>HYP</th> <th>U-LG</th> <th>LONG</th> <th>STD</th> <th>FAST</th> <th>H-SP</th> <th>FX-101</th> <th>FX-102</th> </tr> </thead> <tbody> <tr> <td rowspan="2">FT-H30-M1V-S</td> <td>3,600</td> <td>141.732</td> <td>3,600</td> <td>141.732</td> <td>3,400</td> <td>133.858</td> <td>1,500</td> <td>59.055</td> <td>900</td> <td>35.433</td> <td>370</td> <td>14.567</td> <td>450</td> <td>17.717</td> <td>1,600</td> <td>62.992</td> </tr> <tr> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> <td>(Note 2)</td> </tr> </tbody> </table> | Amplifier | FX-500 series | | | | | | | FX-100 series | | Fiber | Mode | HYP | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | FT-H30-M1V-S | 3,600 | 141.732 | 3,600 | 141.732 | 3,400 | 133.858 | 1,500 | 59.055 | 900 | 35.433 | 370 | 14.567 | 450 | 17.717 | 1,600 | 62.992 | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | |
| Amplifier | FX-500 series | | | | | | | FX-100 series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Fiber | Mode | HYP | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FT-H30-M1V-S | 3,600 | 141.732 | 3,600 | 141.732 | 3,400 | 133.858 | 1,500 | 59.055 | 900 | 35.433 | 370 | 14.567 | 450 | 17.717 | 1,600 | 62.992 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

- Notes: 1) Be careful when installing the thru-beam type fiber equipped with the lens, as the beam envelope becomes narrow and alignment is difficult.
 2) The fiber cable length practically limits the sensing range.
 3) Refer to previous page for the ambient temperature of fibers to be used in combination.
 4) The fiber cable length for the **FT-H30-M1V-S** is 1 m **3.281 ft**. The sensing ranges in HYP, U-LG and LONG of **FX-500** series, in **FX-102** take into account the length of the **FT-J8** atmospheric side fiber.

Liquid Leak / Liquid Detection



It corresponds to various liquid events, from the contact (wetted) type to the pipe mounting type, and up to leak detection.

For detecting the upper limit of liquid surface level, sensor that receives beam when “liquid is absent” is recommended.

The sensor will turn OFF during abnormal conditions (excess fluid, fiber disconnection, etc.)!
Liquid absent: Beam received (Output ON)
Liquid present / fiber is cutoff: Beam not received (Output OFF)

FD-FA93 Strong against air bubbles

Applicable pipe: Transparent pipe, Outer diameter $\varnothing 8$ mm $\varnothing 0.315$ in or more
(When used with the tying bands: $\varnothing 8$ to $\varnothing 80$ mm $\varnothing 0.315$ to $\varnothing 3.150$ in)

FD-F41

Standard type



FD-F4

For 1 mm 0.039 in thick pipes manufactured by PFA

For detecting the lower limit of liquid surface level, sensor that receives beam when “liquid is present” is recommended.

The sensor will turn OFF during abnormal conditions (insufficient liquid, fiber disconnection, etc.) !
Liquid present: Beam received (Output ON)
Liquid absent / fiber is cutoff: Beam not received (Output OFF)

FT-F93 Thru-beam



Full-protection type

FD-HF40Y / FD-F41Y (Liquid level sensing) Metal-free

Small diameter type

($\varnothing 4$ mm $\varnothing 0.157$ in)
Bends easily with its small bending radius, protective tube is cuttable and extendable

FD-HF40Y

R10 mm R0.394 in


Sheath: Polyethylene

R20 mm R0.787 in

$\varnothing 4$ mm $\varnothing 0.157$ in protective tube (fluorine resin)

Heat-resistant

+105 °C +221 °F

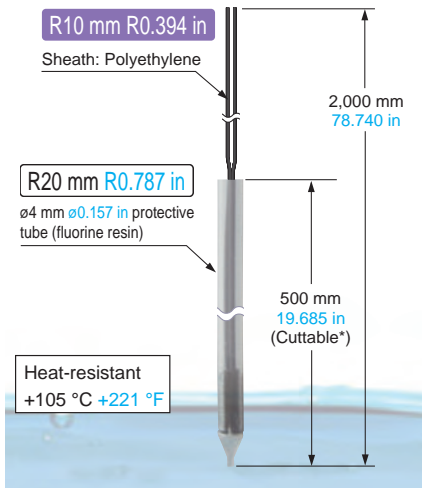

FD-F41Y

R10 mm R0.394 in


Primary sheath: Polyethylene
Secondary sheath: Fluorine resin

R20 mm R0.787 in

$\varnothing 4$ mm $\varnothing 0.157$ in protective tube (fluorine resin)

Heat-resistant

+70 °C +158 °F

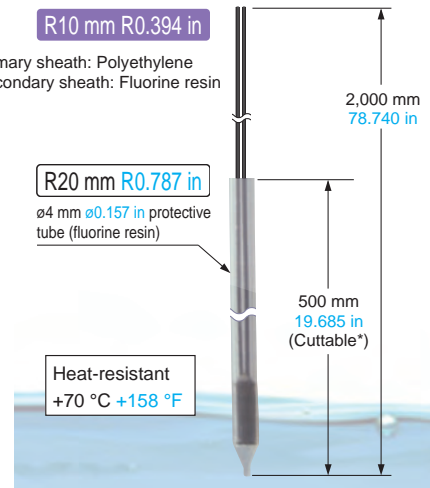

* The range of 50 mm 1.969 in from the fiber tip cannot be cut. Also, fiber length can be extended using **MS-FX-02Y** (optional).

Full-protection type

FD-F71 (Liquid level sensing) SEMI S2 compliant

Detect chemical leaks in semiconductor and LCD manufacturing processes.

Compact, space-saving

Side-mountable fiber head as slim as 10 mm 0.394 in is good to use in confined spaces.

Ideal for use with chemicals and volatile materials

This fiber type sensor is safer to use with volatile materials (SEMI S2 compliant). The fluorine resin fiber head makes it ideal for use with chemicals.



LIST OF FIBERS


Reflective type / Thru-beam type

| Type | Shape of fiber head (mm) | Model No. | Bending radius (mm) | Fiber cable length Free-cut | Description | | Protection | Ambient temp. | Dimensions | | | | | |
|---------------------------|--|---|---|---|--|--|------------|----------------|------------|--|---|---------------|----------------|------|
| | | | | | FX-500 series (STD mode) | FX-101 FX-102 | | | | | | | | |
| Contact type | Liquid level sensing | Heat resistant 125 °C Fluorine resin coating ø6 FD-F8Y | Protective tube R40 Fiber R15 | 2 m (Note 1) | ø6 mm ø0.236 in Protective tube: Fluorine resin, length 1,000 mm 39.370 in (not cuttable) Liquid surface not contacted: Beam received, Liquid surface contacted: Beam not received | | IP68 | -40 to +125 °C | P.59 | | | | | |
| | | Heat resistant 105 °C Fluorine resin coating Metal-free ø4 FD-HF40Y (Note 2) | Protective tube R20 Fiber R10 | | | | | | | 2 m | ø4 mm ø0.157 in Protective tube: Fluorine resin, length 500 mm 19.685 in (cuttable) Liquid surface not contacted: Beam received, Liquid surface contacted: Beam not received | IP68G | -40 to +105 °C | P.61 |
| | | Heat resistant 70 °C Fluorine resin coating throughout the fiber Metal-free ø4 FD-F41Y (Note 2) | | | | | | | | | | | | |
| Liquid leak detection | SEMI S2 compliant W20 x H30 x D10 Tough FD-F71 | R4 Bending durability | 5 m | Liquid leak detection Leak absent: Beam received, Leak present: Beam interrupted Compatible amplifire: FX500 series only | IP67 | -20 to +60 °C | | | | | | | | |
| Pipe-mountable type | Liquid level sensing | Standard W25 x H13 x D20 FD-F41 | R10 | 2 m | Applicable pipe diameter: Outer dia. ø6 to ø26 mm ø0.236 to ø1.024 in transparent pipe [PVC (vinyl chloride), fluorine resin, polycarbonate, acrylic, glass, wall thickness 1 to 3 mm 0.039 to 0.118 in] Liquid absent: Beam received, Liquid present: Beam not received | | | -40 to +100 °C | P.59 | | | | | |
| | | For 1 mm thick PFA pipe W25 x H13 x D20 FD-F4 | | | | | | | | Applicable pipe diameter: Outer dia. ø6 to ø26 mm ø0.236 to ø1.024 in transparent pipe [PFA (fluorine resin) or equivalently transparent pipe, wall thickness 1 mm 0.039 in] Liquid absent: Beam received, Liquid present: Beam not received | | | | |
| | Liquid sensing | Mountable on pipe-array fiber W6.5 x H28.3 x D17 Tough FD-FA93 | R4 Bending durability | | IP40 | Applicable pipe diameter: Outer dia. ø8 mm ø0.315 in or more transparent pipe (When used with the tying bands: ø8 to ø80 mm ø0.315 to ø3.150 in) [PFA (fluorine resin), including translucent] Liquid absent: Beam received, Liquid present: Beam not received | | -40 to +70 °C | | | | | | |
| | | SEMI S2 compliant W23 x H20 x D17 FT-F93 | Protective tube R20 Fiber R2 Bending durability | | | | | | | Applicable pipe diameter: Outer dia. ø3 to ø10 mm ø0.118 to ø0.394 in transparent pipe [PFA (fluorine resin) or equivalently transparent pipe, wall thickness 0.3 to 1 mm 0.012 to 0.039 in] Liquid absent: Beam not received, Liquid present: Beam received Compatible amplifire: FX500 series only | IP40 | -40 to +60 °C | P.49 | |


Notes: 1) The allowable cutting range is 1,000 mm **39.370 in** from the end that the amplifier inserted.
2) Liquid inflow prevention joint, protective tube extension joint, fiber mounting joint is available.

Accessories for additional supply

- **MS-FD-F7-1**
(SUS mounting bracket for **FD-F71**)



- **MS-FD-F7-2**
(PVC mounting bracket for **FD-F71**)




FIBER OPTIONS

| Designation | Model No. | Description | |
|--|------------------|--|---|
| Liquid inflow prevention joint (Note) | MS-FX-01Y | Applicable fibers FD-HF40Y FD-F41Y | This joint suppresses false operations due to liquid slip-in from the top of the protective tube. |
| Protective tube extension joint (Note) | MS-FX-02Y | | The protective tube can be extended. |
| Fiber mounting joint (Note) | MS-FX-03Y | | The joint is used for mounting fibers on a tank. |

Note: The joint internal ferrule (**MS-FX-YF**) is available as a spare part. A distorted ferrule may result in leakage.


Liquid inflow prevention joint

- **MS-FX-01Y**




Protective tube extension joint

- **MS-FX-02Y**



Fiber mounting joint

- **MS-FX-03Y**



Applications

Detecting liquid level in a tank



Leak detection for use in semiconductor device manufacturing



Tough : Refers to a fiber which possesses both unbreakable (bending radius: R10 mm **R0.394 in**, reciprocating bending: 180°) and more flexible (bending radius: R4 mm **R0.157 in** or less) features.

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series

INDEX

New product introduction
Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers

FX-500 series

FX-100 series

INDEX

SENSING RANGE

Fibers are listed in alphabetic order. Refer to p. 2~ for details of each fiber.

Thru-beam type (one pair set)



| Model No. | Sensing range (mm in) (Note 1) | | | | | | | | Dimensions |
|------------------------|--|----------------------------|----------------------------|----------------------------|---------------------------|---------------------------|-------------------|----------------------------|------------|
| | FX-500 series | | | | | FX-100 series | | | |
| | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | |
| FT-140 | 19,600 771.652 (Note 2) | 19,600 771.652 (Note 2) | 19,600 771.652 (Note 2) | 19,600 771.652 (Note 2) | 16,000 629.920 | 6,300 248.031 | 14,000 551.180 | 19,600 771.652 (Note 2) | P.48 |
| FT-30 | 1,350 53.150 | 810 31.890 | 650 25.591 | 400 15.748 | 210 8.268 | 75 2.953 | 135 5.315 | 400 15.748 | P.48 |
| FT-31 | 1,350 53.150 | 770 30.315 | 550 21.654 | 315 12.402 | 210 8.268 | 70 2.756 | 130 5.118 | 340 13.386 | P.48 |
| FT-31S | 1,220 48.031 | 740 29.134 | 550 21.654 | 315 12.402 | 195 7.677 | 63 2.480 | 130 5.118 | 340 13.386 | P.48 |
| FT-31W | 990 38.976 | 590 23.228 | 440 17.323 | 260 10.236 | 150 5.906 | 53 2.087 | 80 3.150 | 240 9.449 | P.48 |
| FT-40 | 3,600 141.732 (Note 2) | 2,200 86.614 | 1,700 66.929 | 1,200 47.244 | 530 20.866 | 190 7.480 | 320 12.598 | 870 34.252 | P.48 |
| FT-42 | 3,600 141.732 (Note 2) | 2,050 80.709 | 1,600 62.992 | 1,130 44.488 | 530 20.866 | 190 7.480 | 300 11.811 | 800 31.496 | P.48 |
| FT-42S | 3,600 141.732 (Note 2) | 2,050 80.709 | 1,600 62.992 | 1,130 44.488 | 530 20.866 | 190 7.480 | 300 11.811 | 800 31.496 | P.48 |
| FT-42W | 3,300 129.921 | 1,900 74.803 | 1,400 55.118 | 800 31.496 | 490 19.291 | 160 6.299 | 260 10.236 | 720 28.346 | P.48 |
| FT-43 | 3,600 141.732 (Note 2) | 2,800 110.236 | 2,100 82.677 | 1,400 55.118 | 770 30.315 | 240 9.449 | 350 13.780 | 970 38.189 | P.48 |
| FT-45X | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,200 47.244 | 630 24.803 | 200 7.874 | 340 13.386 | 920 36.220 | P.49 |
| FT-A11 | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 1,100 43.307 | 3,600 141.732 (Note 2) | P.49 |
| FT-A11W | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 1,300 51.181 | 3,400 133.858 | P.49 |
| FT-A32 | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 2,100 82.677 | 3,600 141.732 (Note 2) | P.49 |
| FT-A32W | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,000 118.110 | 3,600 141.732 (Note 2) | P.49 |
| FT-AL05 | 2,300 90.551 | 1,550 61.024 | 1,500 59.055 | 860 33.858 | 500 19.685 | 170 6.693 | 250 9.843 | 660 25.984 | P.49 |
| FT-E13 | 52 2.047 | 30 1.181 | 24 0.945 | 15 0.591 | 8 0.315 | 2 0.079 | 6 0.236 | 19 0.748 | P.49 |
| FT-E23 | 270 10.630 | 160 6.299 | 125 4.921 | 75 2.953 | 42 1.654 | 13 0.512 | 22 0.866 | 80 3.150 | P.49 |
| FT-F93 | Applicable pipe diameter: Outer dia. $\varnothing 3$ to $\varnothing 10$ mm $\varnothing 0.118$ to $\varnothing 0.394$ in transparent pipe [PFA (fluorine resin) or equivalently transparent pipe, wall thickness 0.3 to 1 mm 0.012 to 0.039 in] Liquid absent: Beam interrupted, Liquid present: Beam received Compatible amplifier: FX-500 series only | | | | | | | | P.49 |
| FT-H13-FM2 | 3,300 129.921 | 1,900 74.803 | 1,300 51.181 | 700 27.559 | 410 16.142 | 140 5.512 | 250 9.843 | 700 27.559 | P.49 |
| FT-H20-J20-S (Note 3) | 1,600 62.992 | 1,000 39.370 | 790 31.102 | 470 18.504 | 300 11.811 | 90 3.543 | 135 5.315 | 420 16.535 | P.50 |
| FT-H20-J30-S (Note 3) | 1,600 62.992 | 1,000 39.370 | 790 31.102 | 470 18.504 | 300 11.811 | 90 3.543 | 135 5.315 | 420 16.535 | P.50 |
| FT-H20-J50-S (Note 3) | 1,600 62.992 | 1,000 39.370 | 790 31.102 | 470 18.504 | 300 11.811 | 90 3.543 | 135 5.315 | 420 16.535 | P.50 |
| FT-H20-M1 | 1,600 62.992 (Note 2) | 1,300 51.181 | 960 37.795 | 540 21.260 | 330 12.992 | 110 4.331 | 210 8.268 | 540 21.260 | P.50 |
| FT-H20-VJ50-S (Note 3) | 2,100 82.677 | 1,300 51.181 | 980 38.583 | 600 23.622 | 390 15.354 | 120 4.724 | 150 5.906 | 500 19.685 | P.50 |
| FT-H20-VJ80-S (Note 3) | 2,100 82.677 | 1,300 51.181 | 980 38.583 | 600 23.622 | 390 15.354 | 120 4.724 | 150 5.906 | 500 19.685 | P.50 |
| FT-H20W-M1 | 1,600 62.992 (Note 2) | 1,000 39.370 | 840 33.071 | 470 18.504 | 300 11.811 | 90 3.543 | 100 3.937 | 300 11.811 | P.50 |
| FT-H30-M1V-S (Note 4) | 1,000 39.370 | 590 23.228 | 470 18.504 | 270 10.630 | 160 6.299 | 55 2.165 | 110 4.331 | 280 11.024 | P.50 |
| FT-H35-M2 | 1,200 47.244 | 880 34.646 | 670 26.378 | 430 16.929 | 250 9.843 | 80 3.150 | 170 6.693 | 490 19.291 | P.50 |
| FT-H35-M2S6 | 1,200 47.244 | 880 34.646 | 670 26.378 | 430 16.929 | 250 9.843 | 80 3.150 | 170 6.693 | 490 19.291 | P.50 |
| FT-HL80Y | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 2,300 90.551 | 740 29.134 | 990 38.976 | 2,340 92.126 | P.50 |
| FT-KS40 | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 1,200 47.244 | 3,600 141.732 (Note 2) | P.51 |
| FT-KV26 | 2,500 98.425 | 1,600 62.992 | 1,200 47.244 | 710 27.953 | 440 17.323 | 160 6.299 | 135 5.315 | 560 22.047 | P.51 |
| FT-KV40 | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 1,200 47.244 | 3,600 141.732 (Note 2) | P.51 |
| FT-KV40W | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,100 122.047 | 3,600 141.732 (Note 2) | P.51 |
| FT-L80Y | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 2,800 110.236 | 920 36.220 | 1,100 43.307 | 2,600 102.362 | P.51 |
| FT-R31 | 1,000 39.370 | 580 22.835 | 440 17.323 | 270 10.630 | 160 6.299 | 55 2.165 | 100 3.937 | 340 13.386 | P.51 |
| FT-R40 | 3,600 141.732 (Note 2) | 1,750 68.898 | 1,500 59.055 | 930 36.614 | 500 19.685 | 160 6.299 | 270 10.630 | 740 29.134 | P.51 |
| FT-R41W | 3,200 125.984 | 1,800 70.866 | 1,400 55.118 | 800 31.496 | 460 18.110 | 150 5.906 | 250 9.843 | 710 27.953 | P.51 |
| FT-R42W | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,500 137.795 | 2,200 86.614 | 1,300 51.181 | 460 18.110 | 510 20.079 | 2,000 78.740 | P.51 |

- Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The fiber cable length practically limits the sensing range.
3) Heat-resistant joint fibers and ordinary-temperature fibers (FT-42) are sold as a set.
4) Sold as a set comprising vacuum type fiber + photo-terminal (FV-BR1) + fiber at atmospheric side (FT-J8).

SENSING RANGE

Fibers are listed in alphabetic order. Refer to p. 2~ for details of each fiber.

Thru-beam type (one pair set) 

| Model No. | Sensing range (mm in) (Note 1) | | | | | | | | Dimensions |
|------------------|--------------------------------|---------------------------|---------------------------|------------------|------------------|---------------|-----------------|------------------|------------|
| | FX-500 series | | | | | | FX-100 series | | |
| | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | |
| FT-R43 | 3,000 118.110 | 1,600 62.992 | 1,100 43.307 | 720 28.346 | 430 16.929 | 130 5.118 | 210 8.268 | 640 25.197 | P.51 |
| FT-R44Y | 3,000 118.110 | 1,600 62.992 | 1,100 43.307 | 720 28.346 | 430 16.929 | 130 5.118 | 210 8.268 | 640 25.197 | P.52 |
| FT-R60Y | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 2,100 82.677 | 1,260 49.606 | 400 15.748 | 690 27.165 | 1,890 74.409 | P.52 |
| FT-S11 | 350 13.780 | 210 8.268 | 160 6.299 | 90 3.543 | 60 2.362 | 19 0.748 | 40 1.575 | 90 3.543 | P.52 |
| FT-S20 | 1,350 53.150 | 810 31.890 | 650 25.591 | 400 15.748 | 210 8.268 | 75 2.953 | 135 5.315 | 400 15.748 | P.52 |
| FT-S21 | 1,350 53.150 | 770 30.315 | 550 21.654 | 315 12.402 | 210 8.268 | 70 2.756 | 130 5.118 | 340 13.386 | P.52 |
| FT-S21W | 990 38.976 | 590 23.228 | 440 17.323 | 260 10.236 | 150 5.906 | 53 2.087 | 80 3.150 | 240 9.449 | P.52 |
| FT-S30 | 3,600 141.732 (Note 2) | 2,200 86.614 | 1,700 66.929 | 1,200 47.244 | 530 20.866 | 190 7.480 | 320 12.598 | 870 34.252 | P.52 |
| FT-S31W | 3,300 129.921 | 1,900 74.803 | 1,400 55.118 | 800 31.496 | 490 19.291 | 160 6.299 | 260 10.236 | 720 28.346 | P.52 |
| FT-S32 | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,100 122.047 | 1,800 70.866 | 600 23.622 | 1,100 43.307 | 3,000 118.110 | P.52 |
| FT-V23 | 1,800 70.866 | 1,000 39.370 | 880 34.646 | 450 17.717 | 280 11.024 | 90 3.543 | 160 6.299 | 400 15.748 | P.52 |
| FT-V24W | 380 14.961 | 230 9.055 | 200 7.874 | 110 4.331 | 60 2.362 | 20 0.787 | 35 1.378 | 90 3.543 | P.53 |
| FT-V25 | 900 35.433 | 550 21.654 | 480 18.898 | 240 9.449 | 140 5.512 | 45 1.772 | 95 3.740 | 260 10.236 | P.53 |
| FT-V30 | 2,200 86.614 | 1,200 47.244 | 1,000 39.370 | 680 26.772 | 340 13.386 | 100 3.937 | 180 7.087 | 480 18.898 | P.53 |
| FT-V40 | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,500 137.795 | 2,400 94.488 | 850 33.465 | 1,000 39.370 | 3,100 122.047 | P.53 |
| FT-V80Y | 3,600 141.732 (Note 2) | 2,800 110.236 | 2,200 86.614 | 1,300 51.181 | 800 31.496 | 240 9.449 | 340 13.386 | 800 31.496 | P.53 |
| FT-Z20HBW | 1,100 43.307 | 670 26.378 | 570 22.441 | 260 10.236 | 180 7.087 | 55 2.165 | 100 3.937 | 320 12.598 | P.53 |
| FT-Z20W | 1,600 62.992 (Note 2) | 1,500 59.055 | 1,100 43.307 | 620 24.409 | 420 16.535 | 130 5.118 | 280 11.024 | 730 28.740 | P.53 |
| FT-Z30 | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 2,100 82.677 | 1,200 47.244 | 410 16.142 | 710 27.953 | 2,300 90.551 | P.53 |
| FT-Z30E | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,500 137.795 | 2,400 94.488 | 740 29.134 | 1,200 47.244 | 3,200 125.984 | P.53 |
| FT-Z30EW | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,400 133.858 | 2,000 78.740 | 630 24.803 | 1,400 55.118 | 2,600 102.362 | P.54 |
| FT-Z30H | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,500 137.795 | 2,600 102.362 | 810 31.890 | 1,400 55.118 | 3,200 125.984 | P.54 |
| FT-Z30HW | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,500 137.795 | 2,600 102.362 | 810 31.890 | 1,400 55.118 | 3,200 125.984 | P.54 |
| FT-Z30W | 3,600 141.732 (Note 2) | 3,300 129.921 | 3,200 125.984 | 1,500 59.055 | 1,000 39.370 | 280 11.024 | 540 21.260 | 1,800 70.866 | P.54 |
| FT-Z40HBW | 3,300 129.921 | 1,900 74.803 | 1,400 55.118 | 800 31.496 | 490 19.291 | 160 6.299 | 260 10.236 | 720 28.346 | P.54 |
| FT-Z40W | 3,600 141.732 (Note 2) | 3,300 129.921 | 2,300 90.551 | 1,500 59.055 | 900 35.433 | 290 11.417 | 410 16.142 | 1,200 47.244 | P.54 |
| FT-Z802Y | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,100 122.047 | 1,900 74.803 | 470 18.504 | 520 20.472 | 3,100 122.047 | P.54 |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
 2) The fiber cable length practically limits the sensing range.

New product introduction
Tough Fiber

Fiber Selection Guide
 Model
 Choose by shape/application
 How to read Model No.
 Earlier models comparison table

Fibers
 Super Quality
 Threaded Type
 Square Head Type
 Cylindrical Type
 Sleeve
 Flat Type
 Small Spot
 Narrow Beam
 Wide Beam
 Convergent Reflective Type
 Retroreflective Type
 Chemical / Oil-resistant
 Heat-resistant
 Vacuum-resistant
 Liquid Leak / Liquid Detection

Fiber Options
 Semi-custom fibers

Fiber Dimensions
 Thru-beam Type
 Retroreflective Type
 Reflective Type
 Others


Amplifiers
 FX-500 series
 FX-100 series

INDEX

SENSING RANGE

Fibers are listed in alphabetic order.
Refer to p. 2~ for details of each fiber.

Retroreflective type



| Model No. | Sensing range (mm in) (Note 1, 2) | | | | | | | | Dimensions |
|-----------------|-----------------------------------|---------------------------------|---------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|------------|
| | FX-500 series | | | | | | FX-100 series | | |
| | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | |
| FR-KZ22E | 15 to 570 0.591 to 22.441 | 15 to 460 0.591 to 18.110 | 15 to 410 0.591 to 16.142 | 15 to 310 0.591 to 12.205 | 15 to 220 0.591 to 8.661 | 15 to 100 0.591 to 3.937 | 15 to 200 0.591 to 7.874 | 15 to 360 0.591 to 14.173 | P.55 |
| FR-KZ50E | 20 to 1,000 0.787 to 39.370 | 20 to 800 0.787 to 31.496 | 20 to 400 0.787 to 15.748 | 20 to 300 0.787 to 11.811 | 20 to 200 0.787 to 7.874 | 20 to 200 0.787 to 7.874 | 20 to 200 0.787 to 7.874 | 20 to 350 0.787 to 13.780 | P.55 |
| FR-KZ50H | 20 to 1,000 0.787 to 39.370 | 20 to 800 0.787 to 31.496 | 20 to 400 0.787 to 15.748 | 20 to 300 0.787 to 11.811 | 20 to 200 0.787 to 7.874 | 20 to 200 0.787 to 7.874 | 20 to 200 0.787 to 7.874 | 20 to 350 0.787 to 13.780 | P.55 |
| FR-Z50HW | 100 to 1,900 3.937 to 74.803 | 100 to 1,400 3.937 to 55.118 | 100 to 1,200 3.937 to 47.244 | 100 to 990 3.937 to 38.976 | 100 to 780 3.937 to 30.709 | 100 to 490 3.937 to 19.291 | 100 to 550 3.937 to 21.654 | 100 to 830 3.937 to 32.677 | P.55 |

- Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
The sensing range of **FR-Z50HW** is specified for the **RF-13**. The sensing range of **FR-KZ50H** and **FR-KZ50E** is specified for the attached reflector **RF-003**. The sensing range of **FR-KZ22E** is specified for the attached reflector.
- 2) The sensing range of retroreflective type is the possible setting range for the attached reflector. The fiber can detect an object less than setting range for the reflector. However, note that if there are any white or highly-reflective surfaces near the fiber head, reflected incident light may affect the fiber head. If this occurs, adjust the threshold value of the amplifier unit before use.

Sensing range when FR-Z50HW is used in combination with a reflector (optional)

| Reflector Model No. | Sensing range (mm in) | | | | | | | |
|---------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|---------------------------------|---------------------------------|----------------------------------|
| | FX-500 series | | | | | | FX-100 series | |
| | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 |
| RF-230 | 100 to 19,000 3.937 to 748.03 | 100 to 8,000 3.937 to 314.960 | 100 to 5,000 3.937 to 196.850 | 100 to 3,600 3.937 to 141.732 | 100 to 2,900 3.937 to 114.173 | 100 to 1,400 3.937 to 55.118 | 100 to 2,400 3.937 to 94.488 | 100 to 5,000 3.937 to 196.850 |
| RF-220 | 100 to 8,000 3.937 to 314.960 | 100 to 4,700 3.937 to 185.039 | 100 to 3,500 3.937 to 137.795 | 100 to 3,000 3.937 to 118.110 | 100 to 1,800 3.937 to 70.866 | 100 to 830 3.937 to 32.677 | 100 to 1,300 3.937 to 51.181 | 100 to 2,600 3.937 to 102.362 |
| RF-210 | 100 to 5,500 3.937 to 216.535 | 100 to 2,700 3.937 to 106.299 | 100 to 2,400 3.937 to 94.488 | 100 to 1,500 3.937 to 59.055 | 100 to 1,200 3.937 to 47.244 | 100 to 530 3.937 to 20.866 | 100 to 980 3.937 to 38.583 | 100 to 1,300 3.937 to 51.181 |

- Note: 1) The sensing range of retroreflective type is the possible setting range for the attached reflector. The fiber can detect an object less than 100 mm 3.937 in. However, note that if there are any white or highly-reflective surfaces near the fiber head, reflected incident light may affect the fiber head. If this occurs, adjust the threshold value of the amplifier unit before use.

SENSING RANGE

Fibers are listed in alphabetic order.
Refer to p. 2~ for details of each fiber.

Reflective type 

| Model No. | Sensing range (mm in) (Note 1, 2) | | | | | | | | Dimensions |
|------------------|--|--------|--------|--------|--------|-------|---------------|--------|------------|
| | FX-500 series | | | | | | FX-100 series | | |
| | HYP | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | |
| FD-30 | 600 | 330 | 250 | 160 | 80 | 25 | 45 | 155 | P.56 |
| | 23.622 | 12.992 | 9.843 | 6.299 | 3.150 | 0.984 | 1.772 | 6.102 | |
| FD-31 | 515 | 290 | 220 | 125 | 80 | 25 | 35 | 140 | P.56 |
| | 20.276 | 11.417 | 8.661 | 4.921 | 3.150 | 0.984 | 1.378 | 5.512 | |
| FD-31W | 330 | 180 | 140 | 80 | 45 | 12 | 15 | 60 | P.56 |
| FD-32G | 650 | 380 | 270 | 200 | 95 | 27 | 70 | 190 | P.56 |
| | 25.591 | 14.961 | 10.630 | 7.874 | 3.740 | 1.063 | 2.756 | 7.480 | |
| FD-32GX | 630 | 410 | 360 | 200 | 100 | 30 | 75 | 210 | P.56 |
| FD-40 | 600 | 330 | 250 | 160 | 80 | 25 | 45 | 155 | P.56 |
| | 23.622 | 12.992 | 9.843 | 6.299 | 3.150 | 0.984 | 1.772 | 6.102 | |
| FD-41 | 515 | 290 | 220 | 125 | 80 | 25 | 35 | 140 | P.56 |
| FD-41S | 515 | 290 | 220 | 125 | 80 | 25 | 35 | 140 | P.56 |
| | 20.276 | 11.417 | 8.661 | 4.921 | 3.150 | 0.984 | 1.378 | 5.512 | |
| FD-41SW | 330 | 180 | 140 | 80 | 45 | 12 | 15 | 60 | P.56 |
| FD-41W | 900 | 630 | 430 | 270 | 150 | 45 | 80 | 230 | P.56 |
| FD-42G | 650 | 380 | 270 | 200 | 95 | 27 | 70 | 190 | P.57 |
| | 25.591 | 14.961 | 10.630 | 7.874 | 3.740 | 1.063 | 2.756 | 7.480 | |
| FD-42GW | 670 | 340 | 280 | 150 | 90 | 25 | 45 | 140 | P.57 |
| FD-60 | 1,550 | 900 | 740 | 520 | 260 | 90 | 140 | 420 | P.57 |
| | 61.024 | 35.433 | 29.134 | 20.472 | 10.236 | 3.543 | 5.512 | 16.535 | |
| FD-61 | 1,400 | 840 | 670 | 450 | 200 | 70 | 120 | 410 | P.57 |
| FD-61G | 1,100 | 800 | 650 | 420 | 200 | 60 | 120 | 350 | P.57 |
| | 43.307 | 31.496 | 25.591 | 16.535 | 7.874 | 2.362 | 4.724 | 13.780 | |
| FD-61S | 1,200 | 790 | 660 | 420 | 220 | 75 | 130 | 360 | P.57 |
| FD-61W | 900 | 630 | 430 | 270 | 150 | 45 | 80 | 230 | P.57 |
| | 35.433 | 24.803 | 16.929 | 10.630 | 5.906 | 1.772 | 3.150 | 9.055 | |
| FD-62 | 1,500 | 1,000 | 940 | 520 | 340 | 110 | 170 | 450 | P.57 |
| FD-64X | 670 | 500 | 410 | 280 | 160 | 50 | 75 | 220 | P.58 |
| | 26.378 | 19.685 | 16.142 | 11.024 | 6.299 | 1.969 | 2.953 | 8.661 | |
| FD-A16 | — | 200 | 200 | 200 | 140 | 75 | 120 | 240 | P.58 |
| FD-AL11 | 670 | 530 | 510 | 320 | 180 | 50 | 100 | 285 | P.58 |
| | 26.378 | 20.866 | 20.079 | 12.598 | 7.087 | 1.969 | 3.937 | 11.220 | |
| FD-E13 | 50 | 29 | 25 | 12 | 7 | 2 | 5 | 15 | P.58 |
| | 1.969 | 1.142 | 0.984 | 0.472 | 0.276 | 0.079 | 0.197 | 0.591 | |
| FD-E23 | 170 | 120 | 80 | 55 | 30 | 9 | 20 | 70 | P.58 |
| FD-EG30 | 170 | 130 | 110 | 48 | 30 | 9 | 20 | 70 | P.58 |
| | 6.693 | 5.118 | 4.331 | 1.890 | 1.181 | 0.354 | 0.787 | 2.756 | |
| FD-EG30S | 170 | 110 | 80 | 50 | 30 | 9 | 20 | 70 | P.59 |
| FD-EG31 | 85 | 45 | 35 | 20 | 12 | 3.5 | 7 | 25 | P.59 |
| | 3.346 | 1.772 | 1.378 | 0.787 | 0.472 | 0.138 | 0.276 | 0.984 | |
| FD-F4 | Applicable pipe diameter: Outer dia. ø6 to ø26 mm ø0.236 to ø1.024 in transparent pipe [PFA (fluorine resin) or equivalently transparent pipe, wall thickness 1 mm 0.039 in] Liquid absent: Beam received, Liquid present: Beam interrupted | | | | | | | | P.59 |
| FD-F41 | Applicable pipe diameter: Outer dia. ø6 to ø26 mm ø0.236 to ø1.024 in transparent pipe [PVC (vinyl chloride), fluorine resin, polycarbonate, acrylic, glass, wall thickness 1 to 3 mm 0.039 to 0.118 in] Liquid absent: Beam received, Liquid present: Beam interrupted | | | | | | | | P.59 |
| FD-F41Y (Note 3) | ø4 mm ø0.157 in Protective tube: Fluorine resin, length 500 mm 19.685 in (cuttable) Liquid surface not contacted: Beam received, Liquid surface contacted: Beam interrupted | | | | | | | | P.59 |
| FD-F71 | Liquid leak detection Leak absent: Beam received, Leak present: Beam interrupted Compatible amplifier: FX-500 series only | | | | | | | | P.59 |
| FD-F8Y | ø6 mm ø0.236 in Protective tube: Fluorine resin, length 1,000 mm 39.370 in (not cuttable) Liquid surface not contacted: Beam received, Liquid surface contacted: Beam interrupted | | | | | | | | P.59 |
| FD-FA93 | Applicable pipe diameter: Outer dia. ø8 mm ø0.315 in or more transparent pipe (When used with the tying bands: ø8 to ø80 mm ø0.315 to ø3.150 in) [PFA (fluorine resin), including translucent] Liquid absent: Beam received, Liquid present: Beam interrupted | | | | | | | | P.59 |

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
2) The sensing range is specified for white non-glossy paper.
3) Liquid inflow prevention joint, protective tube extension joint, fiber mounting joint are available. Please refer to page 35 for details.

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series

INDEX

SENSING RANGE

Fibers are listed in alphabetic order. Refer to p. 2~ for details of each fiber.

Reflective type



| Model No. | Sensing range (mm in) (Note 1, 2) | | | | | | | | Dimensions |
|---------------------------|--|------------------------------|------------------------------|-----------------------------|-----------------------------|-----------------------------|------------------------------|-----------------------------|------------|
| | FX-500 series | | | | | | FX-100 series | | |
| | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | |
| FD-H13-FM2 | 880 34.646 | 640 25.197 | 600 23.622 | 350 13.780 | 200 7.874 | 65 2.559 | 100 3.937 | 280 11.024 | P.60 |
| FD-H18-L31 | 60 2.362 | 32 1.260 | 24 0.945 | 16 0.630 | 13 0.512 | 2 to 6.5 0.079 to 0.256 | 0 to 10 0 to 0.394 | 0 to 25 0 to 0.984 | P.60 |
| FD-H20-21 | 770 30.315 | 500 19.685 | 380 14.961 | 230 9.055 | 130 5.118 | 45 1.772 | 90 3.543 | 280 11.024 | P.60 |
| FD-H20-M1 | 840 33.071 | 550 21.654 | 500 19.685 | 330 12.992 | 200 7.874 | 55 2.165 | 120 4.724 | 300 11.811 | P.60 |
| FD-H25-L43 (Note 3) | 1 to 31 0.039 to 1.220 | 1 to 30 0.039 to 1.181 | 1 to 28 0.039 to 1.102 | 1.5 to 26 0.059 to 1.024 | 1.5 to 24 0.059 to 0.945 | 2 to 18 0.079 to 0.709 | 4 to 16 0.157 to 0.630 | 4 to 23 0.157 to 0.906 | P.60 |
| FD-H25-L45 (Note 3) | 4 to 43.5 0.157 to 1.713 | 4 to 43 0.157 to 1.693 | 4.5 to 43 0.177 to 1.693 | 5 to 42 0.197 to 1.654 | 5 to 40 0.197 to 1.575 | 6.5 to 34 0.256 to 1.339 | 7 to 35 0.276 to 1.378 | 7 to 38 0.276 to 1.496 | P.60 |
| FD-H30-KZ1V-S (Note 3, 4) | 5 to 500 0.197 to 19.685 | 10 to 340 0.394 to 13.386 | 15 to 270 0.591 to 10.630 | 20 to 200 0.787 to 7.874 | 20 to 120 0.787 to 4.724 | 20 to 45 0.787 to 1.772 | 25 to 80 0.984 to 3.150 | 10 to 220 0.394 to 8.661 | P.61 |
| FD-H30-L32 | 40 1.575 | 30 1.181 | 25 0.984 | 17 0.669 | 12 0.472 | 1.5 to 6 0.059 to 0.236 | 2 to 9 0.079 to 0.354 | 0 to 17 0 to 0.669 | P.61 |
| FD-H30-L32V-S (Note 3, 4) | 18 0.709 | 12 0.472 | 10 0.394 | 8 0.315 | 5 0.217 | 1.5 to 3 0.059 to 0.118 | 2.5 to 6.5 0.098 to 0.256 | 0 to 11 0 to 0.433 | P.61 |
| FD-H35-20S | 840 33.071 | 550 21.654 | 440 17.323 | 260 10.236 | 140 5.512 | 45 1.772 | 85 3.346 | 200 7.874 | P.61 |
| FD-H35-M2 | 720 28.346 | 540 21.260 | 460 18.110 | 260 10.236 | 150 5.906 | 45 1.772 | 75 2.953 | 280 11.024 | P.61 |
| FD-H35-M2S6 | 720 28.346 | 540 21.260 | 460 18.110 | 260 10.236 | 150 5.906 | 45 1.772 | 75 2.953 | 280 11.024 | P.61 |
| FD-HF40Y (Note 5) | ø4 mm ø0.157 in Protective tube: Fluorine resin, length 500 mm 19.685 in (cuttable) Liquid surface not contacted: Beam received, Liquid surface contacted: Beam not received | | | | | | | | P.61 |
| FD-L10 (Note 3) | 0 to 6 0 to 0.236 | 0 to 5.5 0 to 0.217 | 0 to 5.5 0 to 0.217 | 0 to 5 0 to 0.197 | 0 to 4.5 0 to 0.177 | 0 to 4 0 to 0.157 | 0 to 4.5 0 to 0.177 | 0 to 5.5 0 to 0.217 | P.62 |
| FD-L11 (Note 3) | 0 to 11.5 0 to 0.453 | 0 to 10.5 0 to 0.413 | 0 to 10 0 to 0.394 | 0 to 9.5 0 to 0.374 | 0 to 9 0 to 0.354 | 0 to 8 0 to 0.315 | 0 to 8 0 to 0.315 | 0 to 9 0 to 0.354 | P.62 |
| FD-L12W (Note 3) | 14 0.551 | 12.5 0.492 | 12 0.472 | 8 0.315 | 0.5 to 7 0.020 to 0.276 | 0.5 to 4 0.020 to 0.157 | 1 to 4.5 0.039 to 0.177 | 0.5 to 7 0.020 to 0.276 | P.62 |
| FD-L20H | 45 1.772 | 35 1.378 | 32 1.260 | 23 0.906 | 2 to 15 0.079 to 0.591 | 5 to 9 0.197 to 0.354 | 5 to 15 0.197 to 0.591 | 1 to 30 0.039 to 1.181 | P.62 |
| FD-L21 (Note 3) | 1 to 19 0.039 to 0.748 | 1 to 18 0.039 to 0.709 | 1 to 18 0.039 to 0.709 | 1.5 to 16 0.059 to 0.630 | 2 to 15 0.079 to 0.591 | 3 to 12 0.118 to 0.472 | 3 to 15 0.118 to 0.591 | 1.5 to 16 0.059 to 0.630 | P.62 |
| FD-L21W (Note 3) | 1.5 to 15 0.059 to 0.591 | 2 to 15 0.079 to 0.591 | 2 to 15 0.079 to 0.591 | 3 to 14 0.118 to 0.551 | 4 to 14 0.158 to 0.551 | 6.5 to 10 0.256 to 0.394 | 7 to 12 0.276 to 0.472 | 3 to 14 0.118 to 0.551 | P.62 |
| FD-L22A (Note 3) | 0 to 31 0 to 1.220 | 0 to 28 0 to 1.102 | 0 to 27 0 to 1.063 | 0 to 24 0 to 0.945 | 0 to 24 0 to 0.945 | 0 to 18 0 to 0.709 | 0 to 19 0 to 0.748 | 0 to 25 0 to 0.984 | P.62 |
| FD-L23 (Note 3) | 0 to 30 0 to 1.181 | 0 to 30 0 to 1.181 | 0 to 30 0 to 1.181 | 0 to 29 0 to 1.142 | 0 to 28 0 to 1.102 | 1.5 to 24 0.059 to 0.945 | 0 to 28 0 to 1.102 | 0 to 30 0 to 1.181 | P.62 |
| FD-L30A (Note 3) | 0 to 43 0 to 1.693 | 0 to 43 0 to 1.693 | 0 to 43 0 to 1.693 | 0 to 43 0 to 1.693 | 0 to 42 0 to 1.654 | 0 to 29 0 to 1.142 | 0 to 40 0 to 1.575 | 0 to 50 0 to 1.969 | P.62 |
| FD-L31A (Note 3) | 3 to 35 0.118 to 1.378 | 4 to 33 0.157 to 1.299 | 4 to 33 0.157 to 1.299 | 4 to 33 0.157 to 1.260 | 4 to 32 0.157 to 1.260 | 5 to 25 0.197 to 0.984 | 5 to 30 0.197 to 1.181 | 4 to 33 0.157 to 1.299 | P.62 |
| FD-L32H (Note 3) | 0 to 110 0 to 4.331 | 0 to 87 0 to 3.425 | 0 to 74 0 to 2.913 | 0 to 56 0 to 2.205 | 1 to 38 0.039 to 1.496 | — | 16 to 30 0.630 to 1.181 | 0 to 50 0 to 1.969 | P.63 |
| FD-R31G | 530 20.866 | 310 12.205 | 260 10.236 | 170 6.693 | 85 3.346 | 27 1.063 | 45 1.772 | 150 5.906 | P.63 |
| FD-R32EG | 170 6.693 | 110 4.331 | 92 3.622 | 45 1.772 | 30 1.181 | 9 0.354 | 20 0.787 | 68 2.677 | P.63 |
| FD-R33EG | 84 3.307 | 44 1.732 | 33 1.299 | 19 0.748 | 11 0.433 | 3 0.118 | 7 0.276 | 22 0.866 | P.63 |
| FD-R34EG | 130 5.118 | 90 3.543 | 70 2.756 | 38 1.496 | 23 0.906 | 7 0.276 | 17 0.669 | 60 2.362 | P.63 |
| FD-R41 | 710 27.953 | 430 16.929 | 320 12.598 | 210 8.268 | 100 3.937 | 34 1.339 | 60 2.362 | 170 6.693 | P.63 |
| FD-R60 | 1,100 43.307 | 600 23.622 | 550 21.654 | 290 11.417 | 190 7.480 | 65 2.559 | 110 4.331 | 240 9.449 | P.63 |
| FD-R61Y | 990 38.976 | 610 24.016 | 435 17.126 | 280 11.024 | 160 6.299 | 50 1.969 | 85 3.346 | 185 7.283 | P.63 |
| FD-S21 | 190 7.480 | 130 5.118 | 110 4.331 | 80 3.150 | 37 1.457 | 11 0.433 | 25 0.984 | 70 2.756 | P.63 |
| FD-S30 | 600 23.622 | 330 12.992 | 250 9.843 | 160 6.299 | 80 3.15 | 25 0.984 | 45 1.772 | 155 6.102 | P.64 |
| FD-S31 | 515 20.276 | 290 11.417 | 220 8.661 | 125 4.921 | 80 3.15 | 25 0.984 | 35 1.378 | 140 5.512 | P.64 |
| FD-S32 | 1,200 47.244 | 790 31.102 | 660 25.984 | 420 16.535 | 220 8.661 | 75 2.953 | 120 4.724 | 345 13.583 | P.64 |

- Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
- 2) The sensing range of reflective type is the value for white non-glossy paper (as for FD-H30-L32 and FD-H18-L31 50 x 50 mm 1.969 x 1.969 in glass substrate).
- 3) The sensing range is specified for transparent glass 100 x 100 x 10.7 mm 3.937 x 3.937 x 0.028 in (FD-L32H: R edge, FD-L21 and FD-L21W: t2 mm 0.079 in) (FD-L10: silicon wafers 100 x 100 mm 3.937 x 3.937 in).
- 4) Sold as a set comprising vacuum type fiber + photo-terminal (FV-BR1) + fiber at atmospheric side (FT-J8).
- 5) Liquid inflow prevention joint, protective tube extension joint, fiber mounting joint are available. Please refer to page 35 for details.

SENSING RANGE

Fibers are listed in alphabetic order. Refer to p. 2~ for details of each fiber.

Reflective type 

| Model No. | Sensing range (mm in) (Note 1, 2) | | | | | | | | Dimensions |
|--------------------------|-----------------------------------|--------------------------------|--------------------------------|------------------------------|------------------------------|-----------------------------|-----------------------------|------------------------------|------------|
| | FX-500 series | | | | | | FX-100 series | | |
| | HYP | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | |
| FD-S32W | 900 35.433 | 630 24.803 | 430 16.929 | 270 10.630 | 150 5.906 | 45 1.772 | 80 3.150 | 230 9.055 | P.64 |
| FD-S33GW | 670 26.378 | 340 13.386 | 280 11.024 | 150 5.906 | 90 3.543 | 25 0.984 | 45 1.772 | 140 5.512 | P.64 |
| FD-S60Y | 600 23.622 | 590 23.228 | 420 16.535 | 320 12.598 | 200 7.874 | 75 2.953 | 140 5.512 | 300 11.811 | P.64 |
| FD-V30 | 240 9.449 | 130 5.118 | 120 4.724 | 65 2.559 | 35 1.378 | 14 0.551 | 25 0.984 | 75 2.953 | P.64 |
| FD-V30W | 80 3.150 | 40 1.575 | 30 1.181 | 20 0.787 | 10 0.394 | 2 0.079 | 6 0.236 | 20 0.787 | P.64 |
| FD-V50 | 370 14.567 | 220 8.661 | 210 8.268 | 120 4.724 | 75 2.953 | 25 0.984 | 40 1.575 | 100 3.937 | P.65 |
| FD-Z20HBW | 1 to 340 0.039 to 13.386 | 1 to 210 0.039 to 8.268 | 1 to 180 0.039 to 7.087 | 2 to 85 0.079 to 3.346 | 2 to 55 0.079 to 2.165 | 3 to 15 0.118 to 0.591 | 2 to 30 0.079 to 1.181 | 1 to 90 0.039 to 3.543 | P.65 |
| FD-Z20W | 260 10.236 | 150 5.906 | 130 5.118 | 1 to 65 0.039 to 2.559 | 2 to 45 0.079 to 1.772 | 5 to 13 0.197 to 0.512 | 2 to 32 0.079 to 1.260 | 1 to 80 0.039 to 3.150 | P.65 |
| FD-Z40HBW | 760 29.921 | 540 21.260 | 470 18.504 | 260 10.236 | 1 to 160 0.039 to 6.299 | 2 to 50 0.079 to 1.969 | 1 to 90 0.039 to 3.543 | 0.5 to 240 0.020 to 9.449 | P.65 |
| FD-Z40W | 790 31.102 | 440 17.323 | 390 15.354 | 190 7.480 | 1 to 120 0.039 to 4.724 | 2 to 35 0.079 to 1.378 | 1 to 74 0.039 to 2.913 | 200 7.874 | P.65 |
| FD-Z50HW (Note 3) | 10 to 2,500 0.394 to 98.425 | 10 to 1,100 0.394 to 43.307 | 10 to 1,000 0.394 to 39.370 | 10 to 650 0.394 to 25.591 | 10 to 410 0.394 to 16.142 | 15 to 130 0.591 to 5.118 | 10 to 200 0.394 to 7.874 | 10 to 530 0.394 to 20.866 | P.65 |

- Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
 2) The sensing range is specified for white non-glossy paper (except for **FD-Z50HW**).
 3) The sensing range is the possible setting range for the attached reflector. The fiber can detect an object less than setting range for the reflector. Refer to P.38 for the sensing range when **FR-Z50HW** is used in combination with a reflector (optional).

- New product introduction
- Tough Fiber
- Fiber Selection Guide
- Model
- Choose by shape/application
- How to read Model No.
- Earlier models comparison table
- Fibers
- Super Quality
- Threaded Type
- Square Head Type
- Cylindrical Type
- Sleeve
- Flat Type
- Small Spot
- Narrow Beam
- Wide Beam
- Convergent Reflective Type
- Retroreflective Type
- Chemical / Oil-resistant
- Heat-resistant
- Vacuum-resistant
- Liquid Leak / Liquid Detection
- Fiber Options
- Semi-custom fibers
- Fiber Dimensions
- Thru-beam Type
- Retroreflective Type
- Reflective Type
- Others
- Amplifiers
- FX-500 series
- FX-100 series
- INDEX

FIBER OPTIONS

Refer to p.66~ for details of lens dimensions.

Lens (For thru-beam type fiber)






| Designation | Model No. | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|-----------|---|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|-------|------|------|------|------|------|--------|--------|--------------|--------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|-------|--|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|--------|--|---------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------|--|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------|--|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------|--|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|-----------|--|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|------------|--|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|------------|--|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------|--|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------|--|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|--------------|--|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Expansion lens (Note 1) | FX-LE1 | <p>Increases the sensing range by 5 times or more. • Ambient temperature: -60 to +350 °C -76 to +662 °F (Note 4) • Beam dia: ø3.6 mm ø0.142 in Sensing range (mm in) [Lens on both sides]</p> <table border="1"> <thead> <tr> <th colspan="2">Amplifier</th> <th colspan="5">FX-500 series</th> <th colspan="2">FX-100 series</th> </tr> <tr> <th>Fiber</th> <th>Mode</th> <th>HYPR</th> <th>U-LG</th> <th>LONG</th> <th>STD</th> <th>FAST</th> <th>H-SP</th> <th>FX-101</th> <th>FX-102</th> </tr> </thead> <tbody> <tr> <td>FT-43</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>1,600 62.992</td> <td>2,400 94.488</td> <td>3,600 141.732 (Note 2)</td> </tr> <tr> <td>FT-42</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>2,200 86.614</td> <td>3,400 133.858</td> <td>3,600 141.732 (Note 2)</td> </tr> <tr> <td>FT-42W</td> <td></td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,500 59.055</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> </tr> <tr> <td>FT-45X</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,100 122.047</td> <td>3,100 122.047</td> <td>3,600 141.732 (Note 2)</td> </tr> <tr> <td>FT-R40</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>2,200 86.614</td> <td>3,400 133.858</td> <td>3,600 141.732 (Note 2)</td> </tr> <tr> <td>FT-R42W</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>2,200 86.614</td> <td>3,400 133.858</td> <td>3,600 141.732 (Note 2)</td> </tr> <tr> <td>FT-R43</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>1,900 74.803</td> <td>670 26.378</td> <td>1,300 51.181</td> <td>3,600 141.732 (Note 2)</td> </tr> <tr> <td>FT-H35-M2</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,300 129.921</td> <td>1,400 55.118</td> <td>2,000 78.740</td> <td>3,500 137.795 (Note 2)</td> </tr> <tr> <td>FT-H20W-M1</td> <td></td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>850 33.465</td> <td>1,300 51.181</td> <td>1,600 62.992 (Note 2)</td> </tr> <tr> <td>FT-H20-M1</td> <td></td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,200 47.244</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> </tr> <tr> <td>FT-H20-J50-S</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,500 137.795</td> <td>2,000 78.740</td> <td>1,600 62.992</td> <td>500 19.685</td> <td>1,000 39.370</td> <td>3,500 137.795 (Note 2)</td> </tr> </tbody> </table> | Amplifier | | FX-500 series | | | | | FX-100 series | | Fiber | Mode | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | FT-43 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 1,600 62.992 | 2,400 94.488 | 3,600 141.732 (Note 2) | FT-42 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 2,200 86.614 | 3,400 133.858 | 3,600 141.732 (Note 2) | FT-42W | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,500 59.055 | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | FT-45X | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,100 122.047 | 3,100 122.047 | 3,600 141.732 (Note 2) | FT-R40 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 2,200 86.614 | 3,400 133.858 | 3,600 141.732 (Note 2) | FT-R42W | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 2,200 86.614 | 3,400 133.858 | 3,600 141.732 (Note 2) | FT-R43 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 1,900 74.803 | 670 26.378 | 1,300 51.181 | 3,600 141.732 (Note 2) | FT-H35-M2 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,300 129.921 | 1,400 55.118 | 2,000 78.740 | 3,500 137.795 (Note 2) | FT-H20W-M1 | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 850 33.465 | 1,300 51.181 | 1,600 62.992 (Note 2) | FT-H20-M1 | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,200 47.244 | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | FT-H20-J50-S | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,500 137.795 | 2,000 78.740 | 1,600 62.992 | 500 19.685 | 1,000 39.370 | 3,500 137.795 (Note 2) | | | | | | | | | | |
| | | Amplifier | | FX-500 series | | | | | FX-100 series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Fiber | Mode | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-43 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 1,600 62.992 | 2,400 94.488 | 3,600 141.732 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-42 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 2,200 86.614 | 3,400 133.858 | 3,600 141.732 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-42W | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,500 59.055 | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-45X | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,100 122.047 | 3,100 122.047 | 3,600 141.732 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-R40 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 2,200 86.614 | 3,400 133.858 | 3,600 141.732 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-R42W | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 2,200 86.614 | 3,400 133.858 | 3,600 141.732 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-R43 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 1,900 74.803 | 670 26.378 | 1,300 51.181 | 3,600 141.732 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-H35-M2 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,300 129.921 | 1,400 55.118 | 2,000 78.740 | 3,500 137.795 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-H20W-M1 | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 850 33.465 | 1,300 51.181 | 1,600 62.992 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FT-H20-M1 | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,200 47.244 | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FT-H20-J50-S | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,500 137.795 | 2,000 78.740 | 1,600 62.992 | 500 19.685 | 1,000 39.370 | 3,500 137.795 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Super-expansion lens (Note 1) | FX-LE2 | <p>Tremendously increases the sensing range with large diameter lenses. • Ambient temperature: -60 to +350 °C -76 to +662 °F (Note 4) • Beam dia: ø9.8 mm ø0.386 in Sensing range (mm in) [Lens on both sides]</p> <table border="1"> <thead> <tr> <th colspan="2">Amplifier</th> <th colspan="5">FX-500 series</th> <th colspan="2">FX-100 series</th> </tr> <tr> <th>Fiber</th> <th>Mode</th> <th>HYPR</th> <th>U-LG</th> <th>LONG</th> <th>STD</th> <th>FAST</th> <th>H-SP</th> <th>FX-101</th> <th>FX-102</th> </tr> </thead> <tbody> <tr> <td>FT-43</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> </tr> <tr> <td>FT-42</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> </tr> <tr> <td>FT-42W</td> <td></td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> </tr> <tr> <td>FT-45X</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> </tr> <tr> <td>FT-R40</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> </tr> <tr> <td>FT-R42W</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> </tr> <tr> <td>FT-R43</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> </tr> <tr> <td>FT-H35-M2</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,500 137.795 (Note 2)</td> <td>3,500 137.795 (Note 2)</td> </tr> <tr> <td>FT-H20W-M1</td> <td></td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> </tr> <tr> <td>FT-H20-M1</td> <td></td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> </tr> <tr> <td>FT-H13-FM2</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,500 137.795 (Note 2)</td> <td>3,500 137.795 (Note 2)</td> </tr> <tr> <td>FT-H20-J50-S</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,500 137.795 (Note 2)</td> <td>3,500 137.795 (Note 2)</td> </tr> </tbody> </table> | Amplifier | | FX-500 series | | | | | FX-100 series | | Fiber | Mode | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | FT-43 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | FT-42 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | FT-42W | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | FT-45X | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | FT-R40 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | FT-R42W | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | FT-R43 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | FT-H35-M2 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,500 137.795 (Note 2) | 3,500 137.795 (Note 2) | FT-H20W-M1 | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | FT-H20-M1 | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | FT-H13-FM2 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,500 137.795 (Note 2) | 3,500 137.795 (Note 2) | FT-H20-J50-S | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,500 137.795 (Note 2) | 3,500 137.795 (Note 2) |
| | | Amplifier | | FX-500 series | | | | | FX-100 series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Fiber | Mode | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-43 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-42 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-42W | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-45X | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-R40 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-R42W | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-R43 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-H35-M2 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,500 137.795 (Note 2) | 3,500 137.795 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-H20W-M1 | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FT-H20-M1 | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FT-H13-FM2 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,500 137.795 (Note 2) | 3,500 137.795 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FT-H20-J50-S | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,500 137.795 (Note 2) | 3,500 137.795 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Side-view lens | FX-SV1 | <p>Beam axis is bent by 90°. • Ambient temperature: -60 to +300 °C -76 to +572 °F (Note 4) • Beam dia: ø2.8 mm ø0.110 in Sensing range (mm in) [Lens on both sides]</p> <table border="1"> <thead> <tr> <th colspan="2">Amplifier</th> <th colspan="5">FX-500 series</th> <th colspan="2">FX-100 series</th> </tr> <tr> <th>Fiber</th> <th>Mode</th> <th>HYPR</th> <th>U-LG</th> <th>LONG</th> <th>STD</th> <th>FAST</th> <th>H-SP</th> <th>FX-101</th> <th>FX-102</th> </tr> </thead> <tbody> <tr> <td>FT-43</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,400 133.858</td> <td>2,600 102.362</td> <td>1,700 66.929</td> <td>970 38.189</td> <td>310 12.205</td> <td>510 20.079</td> <td>1,400 55.118</td> </tr> <tr> <td>FT-42</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>2,100 82.677</td> <td>1,150 45.276</td> <td>370 14.567</td> <td>500 19.685</td> <td>1,700 66.929</td> </tr> <tr> <td>FT-42W</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,500 137.795</td> <td>2,700 106.299</td> <td>1,800 70.866</td> <td>990 38.976</td> <td>320 12.598</td> <td>480 18.898</td> <td>1,300 51.181</td> </tr> <tr> <td>FT-45X</td> <td></td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,400 55.118</td> <td>800 31.496</td> <td>210 8.268</td> <td>540 21.260</td> <td>1,600 62.992 (Note 2)</td> </tr> <tr> <td>FT-R42W</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,500 137.795</td> <td>2,700 106.299</td> <td>1,800 70.866</td> <td>990 38.976</td> <td>320 12.598</td> <td>480 18.898</td> <td>1,300 51.181</td> </tr> <tr> <td>FT-R43</td> <td></td> <td>3,200 125.984</td> <td>1,800 70.866</td> <td>1,300 51.181</td> <td>950 37.402</td> <td>510 20.079</td> <td>160 6.299</td> <td>310 12.205</td> <td>930 36.614</td> </tr> <tr> <td>FT-H35-M2</td> <td></td> <td>3,500 137.795</td> <td>1,600 62.992</td> <td>1,200 47.244</td> <td>780 30.709</td> <td>500 19.685</td> <td>150 5.906</td> <td>280 11.024</td> <td>800 31.496</td> </tr> <tr> <td>FT-H20W-M1</td> <td></td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,500 59.055</td> <td>950 37.402</td> <td>560 22.047</td> <td>190 7.480</td> <td>140 5.512</td> <td>400 15.748</td> </tr> <tr> <td>FT-H20-M1</td> <td></td> <td>1,600 62.992 (Note 2)</td> <td>1,600 62.992 (Note 2)</td> <td>1,300 51.181</td> <td>780 30.709</td> <td>500 19.685</td> <td>150 5.906</td> <td>280 11.024</td> <td>840 33.071</td> </tr> <tr> <td>FT-H20-J50-S</td> <td></td> <td>1,600 62.992 (Note 2)</td> <td>960 37.795</td> <td>740 29.134</td> <td>450 17.717</td> <td>290 11.417</td> <td>80 3.150</td> <td>150 5.906</td> <td>410 16.142</td> </tr> </tbody> </table> | Amplifier | | FX-500 series | | | | | FX-100 series | | Fiber | Mode | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | FT-43 | | 3,600 141.732 (Note 2) | 3,400 133.858 | 2,600 102.362 | 1,700 66.929 | 970 38.189 | 310 12.205 | 510 20.079 | 1,400 55.118 | FT-42 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 2,100 82.677 | 1,150 45.276 | 370 14.567 | 500 19.685 | 1,700 66.929 | FT-42W | | 3,600 141.732 (Note 2) | 3,500 137.795 | 2,700 106.299 | 1,800 70.866 | 990 38.976 | 320 12.598 | 480 18.898 | 1,300 51.181 | FT-45X | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,400 55.118 | 800 31.496 | 210 8.268 | 540 21.260 | 1,600 62.992 (Note 2) | FT-R42W | | 3,600 141.732 (Note 2) | 3,500 137.795 | 2,700 106.299 | 1,800 70.866 | 990 38.976 | 320 12.598 | 480 18.898 | 1,300 51.181 | FT-R43 | | 3,200 125.984 | 1,800 70.866 | 1,300 51.181 | 950 37.402 | 510 20.079 | 160 6.299 | 310 12.205 | 930 36.614 | FT-H35-M2 | | 3,500 137.795 | 1,600 62.992 | 1,200 47.244 | 780 30.709 | 500 19.685 | 150 5.906 | 280 11.024 | 800 31.496 | FT-H20W-M1 | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,500 59.055 | 950 37.402 | 560 22.047 | 190 7.480 | 140 5.512 | 400 15.748 | FT-H20-M1 | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,300 51.181 | 780 30.709 | 500 19.685 | 150 5.906 | 280 11.024 | 840 33.071 | FT-H20-J50-S | | 1,600 62.992 (Note 2) | 960 37.795 | 740 29.134 | 450 17.717 | 290 11.417 | 80 3.150 | 150 5.906 | 410 16.142 | | | | | | | | | | | | | | | | | | | | |
| | | Amplifier | | FX-500 series | | | | | FX-100 series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Fiber | Mode | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-43 | | 3,600 141.732 (Note 2) | 3,400 133.858 | 2,600 102.362 | 1,700 66.929 | 970 38.189 | 310 12.205 | 510 20.079 | 1,400 55.118 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-42 | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 2,100 82.677 | 1,150 45.276 | 370 14.567 | 500 19.685 | 1,700 66.929 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-42W | | 3,600 141.732 (Note 2) | 3,500 137.795 | 2,700 106.299 | 1,800 70.866 | 990 38.976 | 320 12.598 | 480 18.898 | 1,300 51.181 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-45X | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,400 55.118 | 800 31.496 | 210 8.268 | 540 21.260 | 1,600 62.992 (Note 2) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-R42W | | 3,600 141.732 (Note 2) | 3,500 137.795 | 2,700 106.299 | 1,800 70.866 | 990 38.976 | 320 12.598 | 480 18.898 | 1,300 51.181 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-R43 | | 3,200 125.984 | 1,800 70.866 | 1,300 51.181 | 950 37.402 | 510 20.079 | 160 6.299 | 310 12.205 | 930 36.614 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-H35-M2 | | 3,500 137.795 | 1,600 62.992 | 1,200 47.244 | 780 30.709 | 500 19.685 | 150 5.906 | 280 11.024 | 800 31.496 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-H20W-M1 | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,500 59.055 | 950 37.402 | 560 22.047 | 190 7.480 | 140 5.512 | 400 15.748 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | FT-H20-M1 | | 1,600 62.992 (Note 2) | 1,600 62.992 (Note 2) | 1,300 51.181 | 780 30.709 | 500 19.685 | 150 5.906 | 280 11.024 | 840 33.071 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FT-H20-J50-S | | 1,600 62.992 (Note 2) | 960 37.795 | 740 29.134 | 450 17.717 | 290 11.417 | 80 3.150 | 150 5.906 | 410 16.142 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Expansion lens for vacuum fiber (Note 1) | FV-LE1 | <p>Sensing range increases by 4 times or more. • Ambient temperature: -60 to +350 °C -76 to +662 °F (Note 4) • Beam dia: ø3.6 mm ø0.142 in Sensing range (mm in) [Lens on both sides] (Note 3)</p> <table border="1"> <thead> <tr> <th colspan="2">Amplifier</th> <th colspan="5">FX-500 series</th> <th colspan="2">FX-100 series</th> </tr> <tr> <th>Fiber</th> <th>Mode</th> <th>HYPR</th> <th>U-LG</th> <th>LONG</th> <th>STD</th> <th>FAST</th> <th>H-SP</th> <th>FX-101</th> <th>FX-102</th> </tr> </thead> <tbody> <tr> <td>FT-H30-M1V-S</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,400 133.858</td> <td>1,500 59.055</td> <td>900 35.433</td> <td>370 14.567</td> <td>450 17.717</td> <td>1,600 62.992</td> </tr> </tbody> </table> | Amplifier | | FX-500 series | | | | | FX-100 series | | Fiber | Mode | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | FT-H30-M1V-S | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,400 133.858 | 1,500 59.055 | 900 35.433 | 370 14.567 | 450 17.717 | 1,600 62.992 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Amplifier | | FX-500 series | | | | | FX-100 series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fiber | Mode | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FT-H30-M1V-S | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,400 133.858 | 1,500 59.055 | 900 35.433 | 370 14.567 | 450 17.717 | 1,600 62.992 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Beam axis is bent by 90°. • Ambient temperature: -60 to +300 °C -76 to +572 °F (Note 4) • Beam dia: ø3.7 mm ø0.146 in Sensing range (mm in) [Lens on both sides] (Note 3)</p> <table border="1"> <thead> <tr> <th colspan="2">Amplifier</th> <th colspan="5">FX-500 series</th> <th colspan="2">FX-100 series</th> </tr> <tr> <th>Fiber</th> <th>Mode</th> <th>HYPR</th> <th>U-LG</th> <th>LONG</th> <th>STD</th> <th>FAST</th> <th>H-SP</th> <th>FX-101</th> <th>FX-102</th> </tr> </thead> <tbody> <tr> <td>FT-H30-M1V-S</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,400 133.858</td> <td>1,500 59.055</td> <td>900 35.433</td> <td>370 14.567</td> <td>450 17.717</td> <td>1,600 62.992</td> </tr> </tbody> </table> | Amplifier | | FX-500 series | | | | | FX-100 series | | Fiber | Mode | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | FT-H30-M1V-S | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,400 133.858 | 1,500 59.055 | 900 35.433 | 370 14.567 | 450 17.717 | 1,600 62.992 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Amplifier | | FX-500 series | | | | | FX-100 series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fiber | Mode | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FT-H30-M1V-S | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,400 133.858 | 1,500 59.055 | 900 35.433 | 370 14.567 | 450 17.717 | 1,600 62.992 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Vacuum-resistant side-view lens (Note 1) | FV-SV2 | <p>Beam axis is bent by 90°. • Ambient temperature: -60 to +300 °C -76 to +572 °F (Note 4) • Beam dia: ø3.7 mm ø0.146 in Sensing range (mm in) [Lens on both sides] (Note 3)</p> <table border="1"> <thead> <tr> <th colspan="2">Amplifier</th> <th colspan="5">FX-500 series</th> <th colspan="2">FX-100 series</th> </tr> <tr> <th>Fiber</th> <th>Mode</th> <th>HYPR</th> <th>U-LG</th> <th>LONG</th> <th>STD</th> <th>FAST</th> <th>H-SP</th> <th>FX-101</th> <th>FX-102</th> </tr> </thead> <tbody> <tr> <td>FT-H30-M1V-S</td> <td></td> <td>3,600 141.732 (Note 2)</td> <td>3,600 141.732 (Note 2)</td> <td>3,400 133.858</td> <td>1,500 59.055</td> <td>900 35.433</td> <td>370 14.567</td> <td>450 17.717</td> <td>1,600 62.992</td> </tr> </tbody> </table> | Amplifier | | FX-500 series | | | | | FX-100 series | | Fiber | Mode | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | FT-H30-M1V-S | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,400 133.858 | 1,500 59.055 | 900 35.433 | 370 14.567 | 450 17.717 | 1,600 62.992 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Amplifier | | FX-500 series | | | | | FX-100 series | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fiber | Mode | HYPR | U-LG | LONG | STD | FAST | H-SP | FX-101 | FX-102 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FT-H30-M1V-S | | 3,600 141.732 (Note 2) | 3,600 141.732 (Note 2) | 3,400 133.858 | 1,500 59.055 | 900 35.433 | 370 14.567 | 450 17.717 | 1,600 62.992 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

- Notes: 1) Be careful sure to use it only after you have adjusted it sufficiently when installing the thru-beam type fiber equipped with the expansion lens, as the beam envelope becomes narrow and alignment is difficult.
 2) The fiber cable length practically limits the sensing range.
 3) The fiber cable length for the FT-H30-M1V-S is 1 m 3.28 ft. The sensing ranges in HYPR, U-LG and LONG of FX-500 series and in FX-102 are specified considering the length of the FT-J8 atmospheric side fiber.
 4) Refer to p.12, p.15, p.30 and p.32 for the ambient temperature of fibers to be used in combination.

FIBER OPTIONS












Refer to p.66~ for details of lens dimensions.



Lens (For reflective type fiber)

| Designation | Model No. | Description | |
|---------------------------|---|---|--|
| For reflective type fiber | Pinpoint spot lens FX-MR1 |  | Pinpoint spot of $\varnothing 0.5$ mm $\varnothing 0.020$ in. Enables detection of minute objects or small marks. • Distance to focal point: 6 ± 1 mm 0.236 ± 0.039 in • Applicable fibers: FD-42G, FD-42GW • Ambient temperature: -40 to +70 °C -40 to +158 °F (Note) |
| | Zoom lens FX-MR2 |  | The spot diameter is adjustable from $\varnothing 0.7$ to $\varnothing 2$ mm $\varnothing 0.028$ to $\varnothing 0.079$ in according to how much the fiber is screwed in. • Applicable fibers: FD-42G, FD-42GW • Ambient temperature: -40 to +70 °C -40 to +158 °F (Note) • Accessory: MS-EX3 (mounting bracket) |
| | Finest spot lens FX-MR3 |  | Extremely fine spot of $\varnothing 0.15$ mm $\varnothing 0.006$ in approx. achieved. • Applicable fibers: FD-EG31, FD-EG30, FD-42G, FD-42GW, FD-32G, FD-32GX • Ambient temperature: -40 to +70 °C -40 to +158 °F (Note) |
| | Finest spot lens FX-MR6 |  | Extremely fine spot of $\varnothing 0.1$ mm $\varnothing 0.004$ in approx. achieved. • Applicable fibers: FD-EG31, FD-EG30, FD-42G, FD-42GW, FD-32G, FD-32GX • Ambient temperature: -20 to +60 °C -4 to +140 °F (Note) |
| | Zoom lens (side-view type) FX-MR5 |  | FX-MR2 is converted into a side-view type and can be mounted in a very small space. • Applicable fibers: FD-42G, FD-42GW • Ambient temperature: -40 to +70 °C -40 to +158 °F (Note) |

Note: Refer to p.13 or p.23 for the ambient temperature of fibers to be used in combination.

Lens (For square head M3 reflective fiber)

| Type | Spot diameter (mm in) | Distance to focal point (mm in) | Lens | | Fiber | |
|-------------------------------------|-----------------------|----------------------------------|---|---------------|--|---|
| | | | Shape (mm in) | Model No. | Shape | Emitting fiber core (mm in) Model No. |
| For Square head M3 reflective fiber | Finest spot lens | 7 ± 0.5 0.276 ± 0.020 |  | FX-MR7 |  | $\varnothing 0.125$ $\varnothing 0.005$ FD-R33EG |
| | | | | |  | $\varnothing 0.125$ $\varnothing 0.005$ FD-EG31 |
| | | | | |  | $\varnothing 0.175$ $\varnothing 0.007$ FD-R34EG |
| | | | | |  | $\varnothing 0.25$ $\varnothing 0.010$ FD-R32EG |
| | | | | |  | $\varnothing 0.25$ $\varnothing 0.010$ FD-EG30 |
| | | | | |  | $\varnothing 0.5$ $\varnothing 0.020$ FD-R31G |
| | | | | |  | $\varnothing 0.5$ $\varnothing 0.020$ FD-32G |
| | | | | |  | $\varnothing 0.5$ $\varnothing 0.020$ FD-32GX |
| | | | | |  | $\varnothing 0.5$ $\varnothing 0.020$ FD-42G |
| | | | | |  | $\varnothing 0.5$ $\varnothing 0.020$ FD-42GW |

| Type | Spot diameter (mm in) | Sensing range (mm in) | Lens | | Applicable fibers | |
|-------------------------------------|---|------------------------------------|---|---------------|--|-----------|
| | | | Shape (mm in) | Model No. | Emitting fiber core (mm in) | Model No. |
| For Square head M3 reflective fiber | Zoom lens | 10 to 30 0.394 to 1.181 |  | FX-MR8 | $\varnothing 0.125$ $\varnothing 0.005$ FD-R33EG, FD-EG31 | |
| | | | | | $\varnothing 0.175$ $\varnothing 0.007$ FD-R34EG | |
| | | | | | $\varnothing 0.25$ $\varnothing 0.010$ FD-R32EG, FD-EG30 | |
| | | | | | $\varnothing 0.5$ $\varnothing 0.020$ FD-R31G, FD-32G, FD-32GX, FD-42G, FD-42GW | |
| Parallel light lens | $\varnothing 4.0$ $\varnothing 0.157$ approx. | 0 to 30 0 to 1.181 |  | FX-MR9 | $\varnothing 0.125$ $\varnothing 0.005$ FD-R33EG, FD-EG31 | |
| | | | | | $\varnothing 0.175$ $\varnothing 0.007$ FD-R34EG | |
| | | | | | $\varnothing 0.25$ $\varnothing 0.010$ FD-R32EG, FD-EG30 | |
| | | | | | $\varnothing 0.5$ $\varnothing 0.020$ FD-R31G, FD-32G, FD-32GX, FD-42G, FD-42GW | |

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options
Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series

INDEX


FIBER OPTIONS

Model No. when ordering heat-resistant fibers individually as replacement parts

- FT-H20-J20 (one pair set)
- FT-H20-J30 (one pair set)
- FT-H20-J50 (one pair set)
- FT-H20-VJ50 (one pair set)
- FT-H20-VJ80 (one pair set)


Model No. when ordering vacuum-resistant fibers individually as replacement parts

- Vacuum-resistant fiber
FT-H30-M1V (one pair set)
FD-H30-KZ1V
FD-H30-L32V
- Photo-terminal
FV-BR1 (one pair set)
- Mouting bracket for **FD-H30-KZ1V(-S)**
MS-FD-2
- Fiber at atmospheric side
FT-J8 (one pair set)



Model No. when ordering accessories additionally

- **RF-003** (**FR-KZ50E/KZ50H** exclusive reflector)
- **RF-13** (**FR-Z50HW** reflective tape)
- **FX-CT2** (Fiber cutter)
- **FX-CT3** (**FD-H40Y/F41Y** fiber cutter)
- **FX-AT2** (Attachment for fixed-length fiber, Orange)
- **FX-AT3** (Attachment for $\varnothing 2.2$ mm $\varnothing 0.087$ in fiber, Clear orange)
- **FX-AT4** (Attachment for $\varnothing 1$ mm $\varnothing 0.039$ in fiber, Black)
- **FX-AT5** (Attachment for $\varnothing 1.3$ mm $\varnothing 0.051$ in fiber, Gray)
- **FX-AT6** (Attachment for $\varnothing 1$ mm $\varnothing 0.039$ in / $\varnothing 1.3$ mm $\varnothing 0.051$ in mixed fiber, Black / Gray)
- **MS-FD-2** (Fiber mounting bracket)

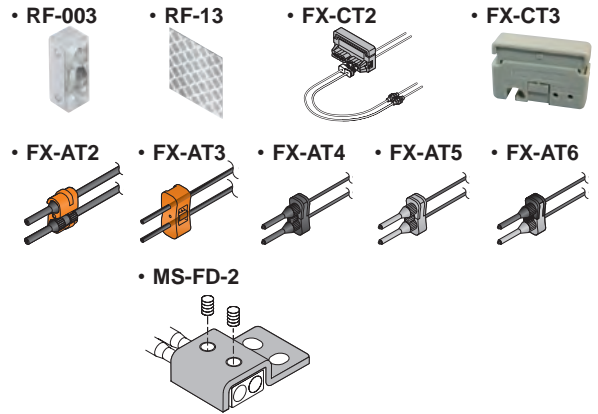

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series

INDEX


FIBER OPTIONS

Others


| Designation | Model No. | Description | | | | |
|---|---------------------------|---|--|---|------------|--|
| Protective tube for thru-beam type fiber | FTP-500 (0.5 m 1.640 ft) | For M4 thread | Applicable fibers | FT-42 | FT-43 | The protective tube, made of non-corrosive stainless steel, protects the inner fiber cable from any external forces. |
| | FTP-1000 (1 m 3.281 ft) | | | FT-42S | FT-H13-FM2 | |
| | FTP-1500 (1.5 m 4.921 ft) | FT-42W | | | | |
| | FTP-N500 (0.5 m 1.640 ft) | For M3 thread | | FT-31 | FD-31 | |
| | FTP-N1000 (1 m 3.281 ft) | | | FT-31S | FD-31W | |
| FTP-N1500 (1.5 m 4.921 ft) | | FT-31W | | | | |
| Protective tube for reflective type fiber | FDP-500 (0.5 m 1.640 ft) | For M6 thread | FD-61 | FD-62 | | |
| | FDP-1000 (1 m 3.281 ft) | | FD-61G | FD-H13-FM2 | | |
| | FDP-1500 (1.5 m 4.921 ft) | FD-61S | | | | |
| | FDP-N500 (0.5 m 1.640 ft) | For M4 thread | FD-41 | FD-41S | | |
| | FDP-N1000 (1 m 3.281 ft) | | FD-41W | FD-41SW | | |
| FDP-N1500 (1.5 m 4.921 ft) | | | | | | |
| Fiber bender | FB-1 | The fiber bender bends the sleeve part of the fiber head at the proper radius. (Note 1) | | | | |
| Universal sensor mounting stand (Note 2) | MS-AJ1-F | Horizontal mounting type | Mounting stand assembly for fiber (For M3, M4 or M6 threaded head fiber) | | | |
| | MS-AJ2-F | Vertical mounting type | | | | |
| Liquid inflow prevention joint (Note 2) | MS-FX-01Y | Applicable fibers | FD-HF40Y FD-F41Y | This joint suppresses false operations due to liquid slip-in from the top of the protective tube. | | |
| Protective tube extension joint (Note 2) | MS-FX-02Y | | | The protective tube can be extended. | | |
| Fiber mounting joint (Note 2) | MS-FX-03Y | | | The joint is used for mounting fibers on a tank. | | |
| Single core holder | FX-AT15A | | | The incident light intensity may vary when using a multi-core fiber or a thin type sharp bending fiber. This holder suppresses the variation in the incident light intensity. (Brown) | | |
| Reflector | RF-210 | | | Used with FR-Z50HW. | | |
| | RF-220 | Refer to p.27 or p.38 for the sensing range of FR-Z50HW to be used in combination. | | | | |
| | RF-230 | | | | | |

Notes: 1) Do not bend the sleeve part of any side-view type fiber or ultra-small diameter head type fiber.
 2) The joint internal ferrule (MS-FX-YF) is available as a spare part. A distorted ferrule may result in leakage.


Liquid inflow prevention joint





Protective tube extension joint




Fiber mounting joint




Reflector



Protective tube





Fiber bender



Universal sensor mounting stand

Using the arm which enables adjustment in the horizontal direction, sensing can also be done from above an assembly line.



Single core holder



New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series

INDEX


Semi-custom fibers that flexibly meet diverse needs

Guide to interchanging fiber length and sleeve length

Custom-ordered products are available with different fiber lengths and sleeve lengths in order to respond quickly to different requirements. Contact us more in formation.

Fiber length change


It is possible to extend up to 30 m **98.425 ft** in units of 1 m **3.281 ft**, varying depending on the model. Refer to the table on the next page for applicable models.

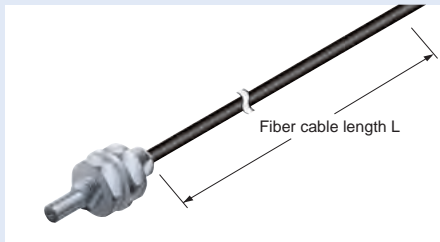

Note that the model number differs from previous models with changed lengths.

Sleeve length change

Extension is possible up to 120 mm **4.724 in** in units of 10 mm **0.394 in**. Applicable models are sleeve extension-type models indicated by ▲ in the table on the next page.

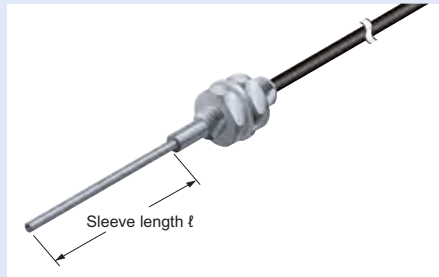


Note that the model number differs from previous models with changed lengths.


• Attenuation ratio characteristics for fiber cable length and sensing range

Note that the longer the fiber cable length, the shorter the sensing range.

Typical example: Bending radius R4 mm/R2 mm (Tough fiber)

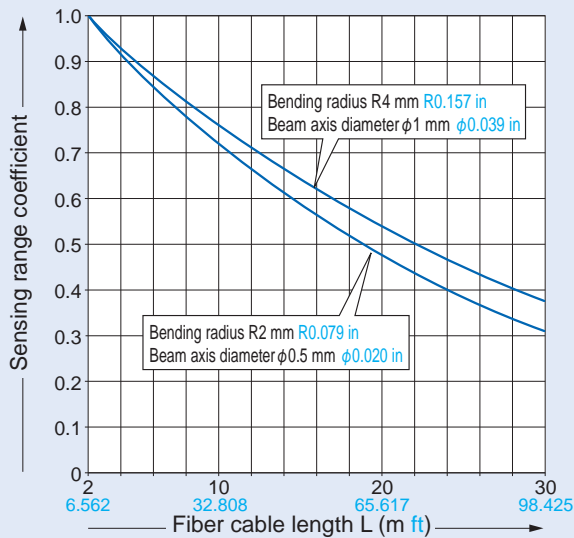

Typical example: Bending radius R1 mm (Sharp bending fiber FT-□W/FD-□W)

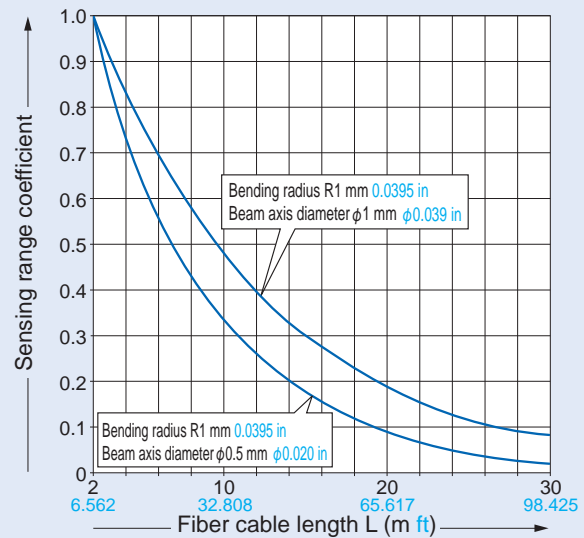


Note: Because infrared types are easily affected by humidity, please ask assistance when using them in a humid environment or in an environment with varying humidity.

Extended protective tube

The chemical-resistant cover and stainless jacket can be extended in accordance with the fiber cable length. Applicable models are indicated in the table as follows.

- ★: Models which can have extended protective tube (fluorine resin)
- ☆: Models which can have extended stainless jacket sheath



- New product introduction
- Tough Fiber
- Fiber Selection Guide
- Model
- Choose by shape/application
- How to read Model No
- Earlier models comparison table
- Fibers
- Super Quality
- Threaded Type
- Square Head Type
- Cylindrical Type
- Sleeve
- Flat Type
- Small Spot
- Narrow Beam
- Wide Beam
- Convergent Reflective Type
- Retroreflective Type
- Chemical / Oil-resistant
- Heat-resistant
- Vacuum-resistant
- Liquid Leak / Liquid Detection
- Fiber Options
- Semi-custom fibers
- Fiber Dimensions
- Thru-beam Type
- Retroreflective Type
- Reflective Type
- Others
- Amplifiers
- FX-500 series
- FX-100 series
- INDEX

Applicable models

Thru-beam type

| Basic specifications | | | | | Applicable fiber length | |
|----------------------|--------------------------------|----------------------------------|--------------------|---|-------------------------|----------|
| Model No. | Fiber cable length Free-cut | Protective tube extension length | Sleeve length (mm) | Sensing range (mm) FX-500 series (STD)(Note 1) | Max. (m) | Unit (m) |
| FT-140 | 10 m | — | — | 19,600 (Note 2) | 30 | 1 |
| FT-31 | 2 m | — | — | 315 | 30 | 1 |
| ▲FT-31S | 2 m | — | 40 (Note 3) | 315 | 30 | 1 |
| FT-31W | 2 m | — | — | 260 | 20 | 1 |
| FT-42 | 2 m | — | — | 1,130 | 30 | 1 |
| ▲FT-42S | 2 m | — | 40 (Note 3) | 1,130 | 30 | 1 |
| FT-42W | 2 m | — | — | 800 | 30 | 1 |
| FT-43 | 2 m | — | — | 1,400 | 30 | 1 |
| FT-45X | 1 m | — | — | 1,200 | 10 | 0.5 |
| FT-A11 | 2 m | — | — | 3,600 (Note 2) | 10 | 1 |
| FT-A11W | 2 m | — | — | 3,600 (Note 2) | 10 | 1 |
| FT-A32 | 2 m | — | — | 3,600 (Note 2) | 10 | 1 |
| FT-A32W | 2 m | — | — | 3,600 (Note 2) | 10 | 1 |
| FT-AL05 | 2 m | — | — | 860 | 20 | 1 |
| FT-E13 | 1 m | — | 5 | 15 | 10 | 0.5 |
| FT-E23 | 1 m | — | 5 | 75 | 10 | 0.5 |
| ★FT-F93 | 2 m | 1 m (Note 4) | — | — | 30 | 1 |
| FT-H13-FM2 | 2 m | — | — | 700 | 30 | 1 |
| FT-H20-J50-S | 500 mm | — | — | 470 | 6.5 | 0.1 |
| FT-H20-M1 | 1 m | — | — | 540 | 6.5 | 0.1 |
| FT-H20-VJ80-S | 800 mm | — | — | 600 | 6.5 | 0.1 |
| FT-H20W-M1 | 1 m | — | — | 470 | 6.5 | 0.1 |
| FT-H30-M1V-S | 1 m | — | — | 270 | 6.5 | 0.1 |
| FT-H35-M2 | 2 m | — | — | 430 | 6.5 | 0.1 |
| FT-H35-M2S6 | 2 m | — | — | 430 | 6.5 | 0.1 |
| ★FT-HL80Y | 2 m | 1.5 m (Note 4) | — | 3,600 (Note 2) | 30 | 1 |
| FT-KS40 | 2 m | — | — | 3,600 (Note 2) | 10 | 1 |
| FT-KV26 | 2 m | — | — | 710 | 10 | 1 |
| FT-KV40 | 2 m | — | — | 3,600 (Note 2) | 10 | 1 |
| FT-KV40W | 2 m | — | — | 3,600 (Note 2) | 10 | 1 |
| ★FT-L80Y | 2 m | 1.5 m (Note 4) | — | 3,600 (Note 2) | 30 | 1 |
| FT-R31 | 2 m | — | — | 270 | 30 | 1 |
| FT-R43 | 2 m | — | — | 720 | 30 | 1 |
| FT-R40 | 2 m | — | — | 930 | 30 | 1 |
| FT-R41W | 2 m | — | — | 800 | 30 | 1 |
| FT-R42W | 2 m | — | — | 2,200 | 30 | 1 |
| FT-R44Y | 2 m | — | — | 720 | 30 | 1 |
| FT-R60Y | 2 m | — | — | 2,100 | 30 | 1 |
| FT-S11 | 500 mm | — | — | 90 | 30 | 1 |
| FT-S21 | 2 m | — | — | 315 | 30 | 1 |
| FT-S21W | 2 m | — | — | 260 | 20 | 1 |
| FT-S31W | 2 m | — | — | 800 | 30 | 1 |
| FT-S32 | 2 m | — | — | 3,100 | 30 | 1 |
| FT-V23 | 2 m | — | 20 | 450 | 30 | 1 |
| FT-V24W | 2 m | — | 15 | 110 | 10 | 1 |
| FT-V25 | 2 m | — | 15 | 240 | 30 | 1 |
| FT-V30 | 2 m | — | 20 | 680 | 30 | 1 |
| FT-V40 | 2 m | — | — | 3,500 | 30 | 1 |
| ★FT-V80Y | 2 m | 1.5 m (Note 4) | — | 3,600 (Note 2) | 30 | 1 |
| FT-Z20HBW | 1 m | — | — | 260 | 20 | 1 |
| FT-Z20W | 1 m | — | — | 620 | 20 | 1 |
| FT-Z30 | 2 m | — | — | 2,100 | 30 | 1 |
| FT-Z30E | 2 m | — | — | 3,500 | 30 | 1 |
| FT-Z30EW | 2 m | — | — | 3,400 | 20 | 1 |
| FT-Z30H | 2 m | — | — | 3,500 | 30 | 1 |
| FT-Z30HW | 2 m | — | — | 3,500 | 20 | 1 |
| FT-Z30W | 2 m | — | — | 1,500 | 20 | 1 |
| FT-Z40HBW | 2 m | — | — | 800 | 20 | 1 |
| FT-Z40W | 2 m | — | — | 1,500 | 20 | 1 |
| FT-Z802Y | 2 m | — | — | 3,100 | 30 | 1 |

Retroreflective type

| Basic specifications | | | | | Applicable fiber length | |
|----------------------|--------------------------------|----------------------------------|--------------------|---|-------------------------|----------|
| Model No. | Fiber cable length Free-cut | Protective tube extension length | Sleeve length (mm) | Sensing range (mm) FX-500 series (STD)(Note 1) | Max. (m) | Unit (m) |
| FR-KZ22E | 2 m | — | — | 15 to 310 | 10 | 1 |
| FR-KZ50E | 2 m | — | — | 20 to 300 | 10 | 1 |
| FR-KZ50H | 2 m | — | — | 20 to 300 | 10 | 1 |
| FR-Z50HW | 2 m | — | — | 100 to 990 | 30 | 1 |

▲: Models which can have extended sleeve

★: Models which can have extended protective tube (fluorine resin)

☆: Models which can have extended stainless jacket sheath

Notes: 1) Note that the sensing range of the free-cut type fiber may be reduced by 20% max. depending upon how the fiber is cut.

2) The fiber cable length practically limits the sensing range.

3) Applicable sleeve length is from 10 to 120 mm 0.394 to 4.724 in and in units of 10 mm 0.394 in.

4) Applicable protective length is up to 10 m 32.808 ft and in units of 0.5 m 1.640 ft. (however, FD-32GX is in units of 0.1 m 0.328 ft.)

5) Fiber length (fixed-length) for heat-resistant fiber side. Fiber length for ordinary temperature side is 2 m 6.562 ft (free-cut).

6) The allowable cutting range is 500 mm 19.685 in from the end that the amplifier inserted.

Reflective type

| Basic specifications | | | | | Applicable fiber length | |
|----------------------|--------------------------------|----------------------------------|--------------------|---|-------------------------|----------|
| Model No. | Fiber cable length Free-cut | Protective tube extension length | Sleeve length (mm) | Sensing range (mm) FX-500 series (STD)(Note 1) | Max. (m) | Unit (m) |
| FD-31 | 2 m | — | — | 125 | 30 | 1 |
| FD-31W | 2 m | — | — | 80 | 20 | 1 |
| FD-32G | 2 m | — | — | 200 | 30 | 1 |
| ☆FD-32GX | 1 m | 300 mm (Note 4) | — | 200 | 30 | 1 |
| FD-41 | 2 m | — | — | 125 | 30 | 1 |
| ▲FD-41S | 2 m | — | 40 (Note 3) | 125 | 30 | 1 |
| ▲FD-41SW | 2 m | — | 40 (Note 3) | 80 | 20 | 1 |
| FD-41W | 2 m | — | — | 270 | 20 | 1 |
| FD-42G | 2 m | — | — | 200 | 30 | 1 |
| FD-42GW | 2 m | — | — | 150 | 20 | 1 |
| FD-61 | 2 m | — | — | 450 | 30 | 1 |
| FD-61G | 2 m | — | — | 420 | 30 | 1 |
| ▲FD-61S | 2 m | — | 40 (Note 3) | 420 | 30 | 1 |
| FD-61W | 2 m | — | — | 270 | 30 | 1 |
| FD-62 | 2 m | — | — | 520 | 30 | 1 |
| FD-64X | 1 m | — | — | 280 | 10 | 0.5 |
| FD-A16 | 2 m | — | — | 200 | 30 | 1 |
| FD-AL11 | 2 m | — | — | 320 | 20 | 1 |
| FD-E13 | 1 m | — | 3 | 12 | 3 | 0.1 |
| FD-E23 | 1 m | — | 5 | 55 | 3 | 0.1 |
| FD-EG30 | 500 mm | — | — | 48 | 3 | 0.1 |
| FD-EG30S | 1 m | — | 15 | 50 | 3 | 0.1 |
| FD-EG31 | 500 mm | — | — | 20 | 3 | 0.1 |
| FD-F4 | 2 m | — | — | — | 10 | 1 |
| FD-F41 | 2 m | — | — | — | 10 | 1 |
| ★FD-F71 | 5 m | 3 m (Note 4) | — | — | 20 | 1 |
| FD-FA93 | 2 m | — | — | — | 10 | 1 |
| FD-H13-FM2 | 2 m | — | — | 350 | 30 | 1 |
| FD-H18-L31 | 2 m | — | — | 16 | 5 | 1 |
| FD-H20-21 | 1 m | — | — | 230 | 6.5 | 0.1 |
| FD-H20-M1 | 1 m | — | — | 330 | 6.5 | 0.1 |
| FD-H25-L43 | 3 m | — | — | 1.5 to 26 | 6.5 | 0.1 |
| FD-H25-L45 | 3 m | — | — | 5 to 42 | 6.5 | 0.1 |
| FD-H30-KZ1V-S | 1 m | — | — | 20 to 200 | 6.5 | 0.1 |
| FD-H30-L32 | 2 m | — | — | 17 | 5 | 1 |
| FD-H30-L32V-S | 3 m | — | — | 8 | 6.5 | 0.1 |
| FD-H35-20S | 1 m | — | — | 260 | 6.5 | 0.1 |
| FD-H35-M2 | 2 m | — | — | 260 | 6.5 | 0.1 |
| FD-H35-M2S6 | 2 m | — | — | 260 | 6.5 | 0.1 |
| FD-L10 | 2 m | — | — | 0 to 5 | 5 | 1 |
| FD-L11 | 2 m | — | — | 0 to 9.5 | 5 | 1 |
| FD-L12W | 1 m | — | — | 8 | 5 | 1 |
| FD-L20H | 2 m | — | — | 30 | 5 | 1 |
| FD-L21 | 2 m | — | — | 1.5 to 16 | 5 | 1 |
| FD-L21W | 2 m | — | — | 3 to 14 | 5 | 1 |
| FD-L22A | 2 m | — | — | 0 to 24 | 5 | 1 |
| FD-L23 | 3 m | — | — | 0 to 29 | 5 | 1 |
| FD-L30A | 3 m | — | — | 0 to 43 | 5 | 1 |
| FD-L31A | 3 m | — | — | 4 to 33 | 5 | 1 |
| FD-L32H | 4 m | — | — | 0 to 56 | 5 | 1 |
| FD-R31G | 2 m | — | — | 170 | 30 | 1 |
| FD-R32EG | 500 mm | — | — | 45 | 3 | 0.1 |
| FD-R33EG | 500 mm | — | — | 19 | 3 | 0.1 |
| FD-R34EG | 500 mm | — | — | 38 | 3 | 0.1 |
| FD-R41 | 2 m | — | — | 210 | 30 | 1 |
| FD-R60 | 2 m | — | — | 290 | 30 | 1 |
| FD-R61Y | 2 m | — | — | 280 | 30 | 1 |
| FD-S21 | 1 m | — | — | 80 | 20 | 1 |
| FD-S31 | 2 m | — | — | 125 | 30 | 1 |
| FD-S32 | 2 m | — | — | 420 | 30 | 1 |
| FD-S32W | 2 m | — | — | 270 | 20 | 1 |
| FD-S33GW | 2 m | — | — | 150 | 20 | 1 |
| FD-S60Y | 2 m | 1.5 m (Note 4) | — | 320 | 30 | 1 |
| FD-V30 | 2 m | — | 15 | 65 | 30 | 1 |
| FD-V30W | 2 m | — | 15 | 20 | 10 | 1 |
| FD-V50 | 2 m | — | 20 | 120 | 30 | 1 |
| FD-Z20HBW | 1 m | — | — | 2 to 85 | 20 | 1 |
| FD-Z20W | 1 m | — | — | 1 to 65 | 20 | 1 |
| FD-Z40HBW | 2 m | — | — | 260 | 20 | 1 |
| FD-Z40W | 2 m | — | — | 190 | 20 | 1 |
| FD-Z50HW | 2 m | — | — | 10 to 650 | 30 | 1 |

DIMENSIONS (Unit: mm in)

Refer to the **FX-500 series** (p.96), **FX-100 series** (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.

Thru-beam type fibers




Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.

FT-140


Free-cut

<with FX-AT3>

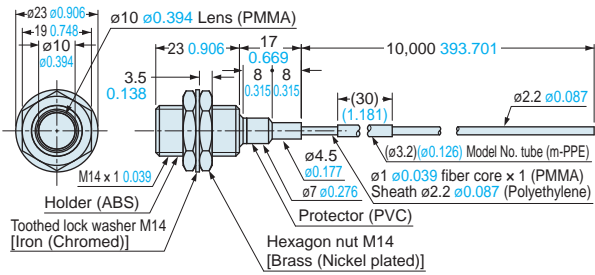

FT-30


<with FX-AT2>

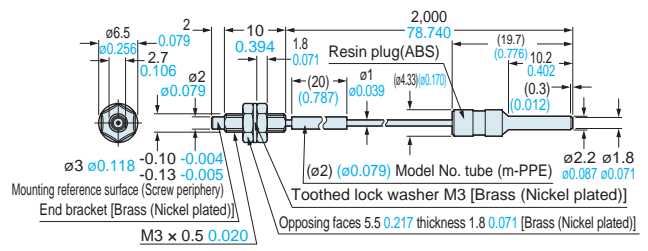

FT-31

Free-cut


<with FX-AT4>

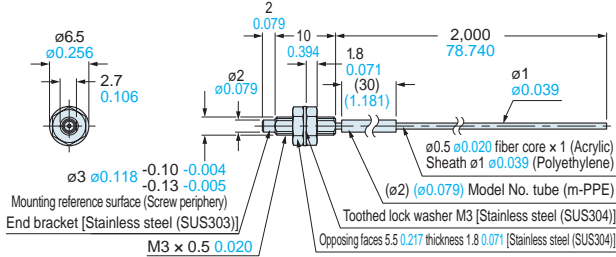

FT-31S

Free-cut


<with FX-AT4>

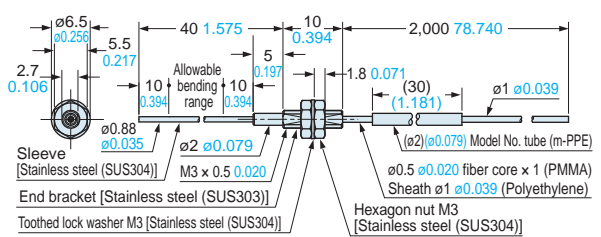

FT-31W


Free-cut

<with FX-AT4>

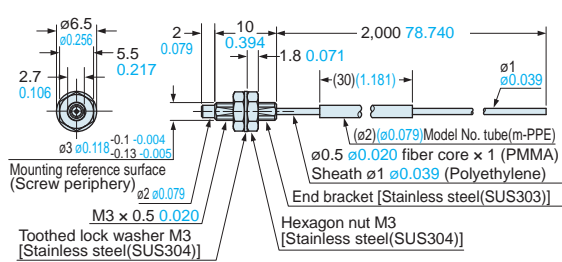

FT-40


<with FX-AT2>

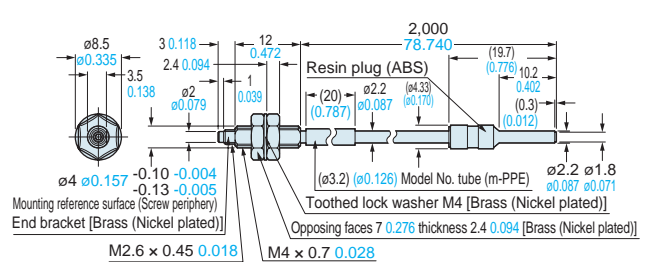

FT-42

Free-cut


<with FX-AT3>

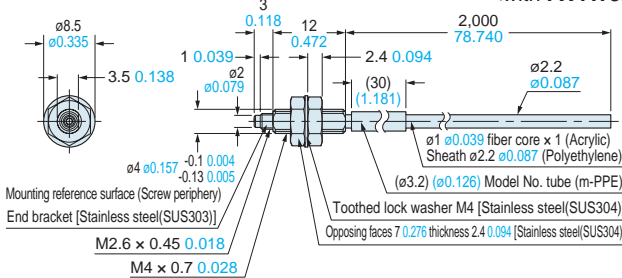

FT-42S

Free-cut


<with FX-AT3>

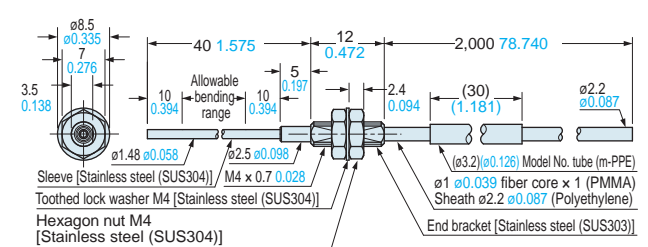

FT-42W

Free-cut


<with FX-AT3>

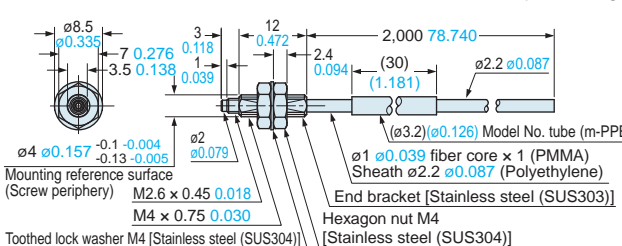

FT-43

Free-cut

<with FX-AT3>

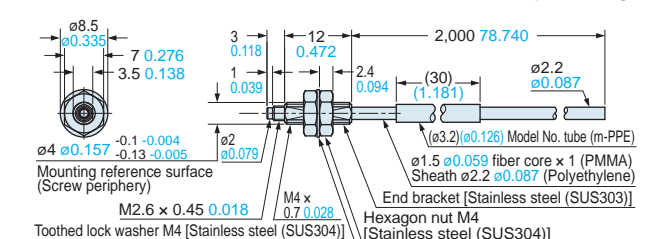

DIMENSIONS (Unit: mm in)


Refer to the **FX-500 series** (p.96), **FX-100 series** (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.

Thru-beam type fibers




Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.


FT-45X

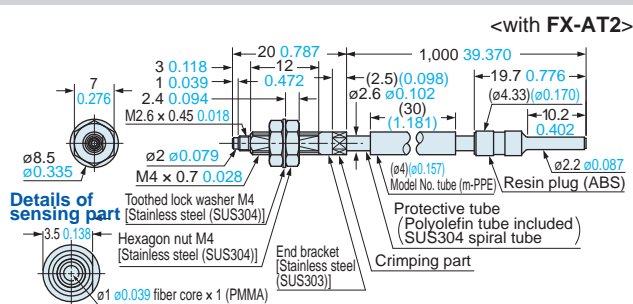


FT-A11W

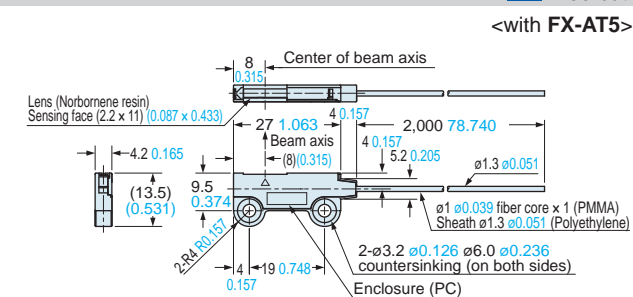


FT-A32W

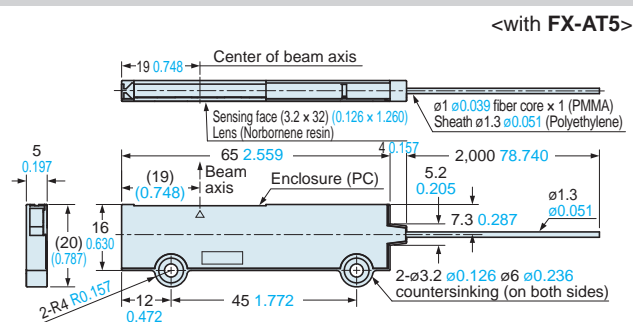


FT-E13

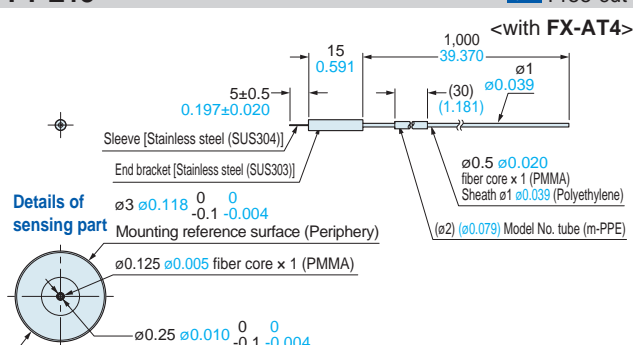


FT-F93

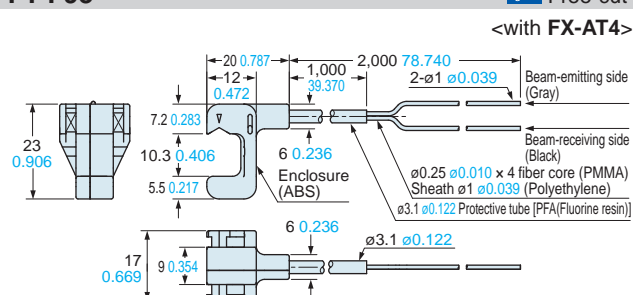


FT-A11

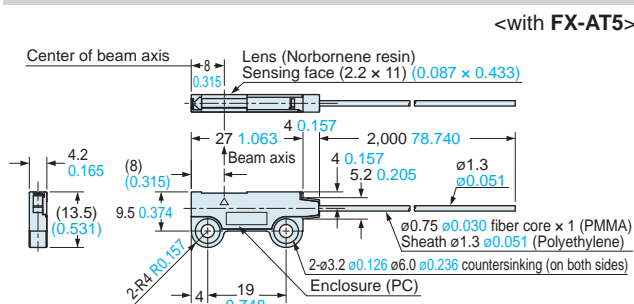


FT-A32

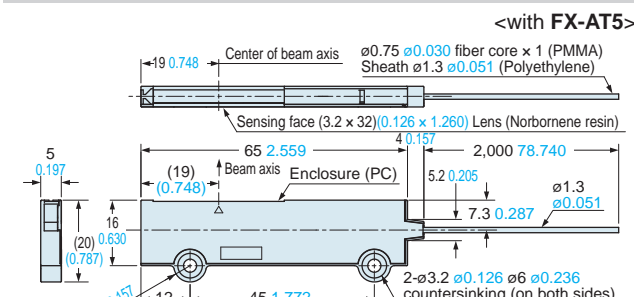


FT-AL05

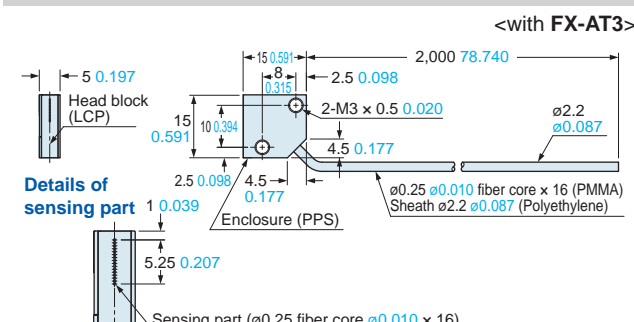

FT-E23

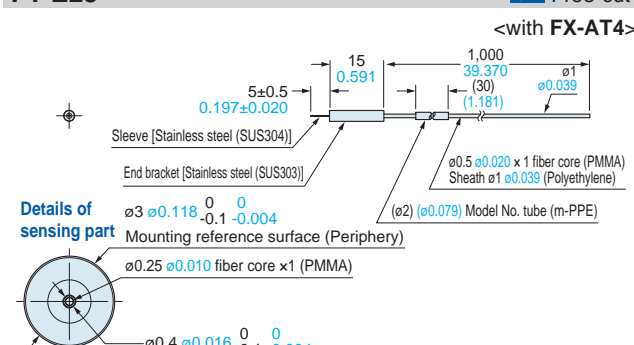

FT-H13-FM2

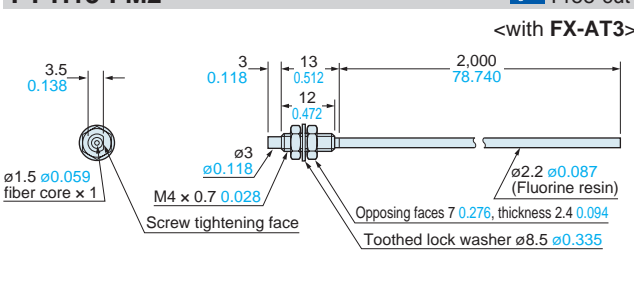

New product introduction

Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application
 How to read Model No.
 Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers

FX-500 series

FX-100 series

INDEX

DIMENSIONS (Unit: mm in)

Refer to the **FX-500** series (p.96), **FX-100** series (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.


Thru-beam type fibers




Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.

FT-H20-J20-S FT-H20-J30-S FT-H20-J50-S Free-cut (Note)

Heat-resistant side unit diagram (side view)

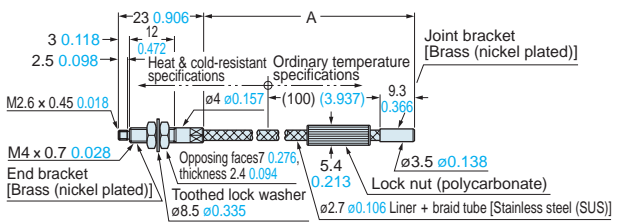

Ordinary temperature side fiber (FT-42) connection diagram (front view)

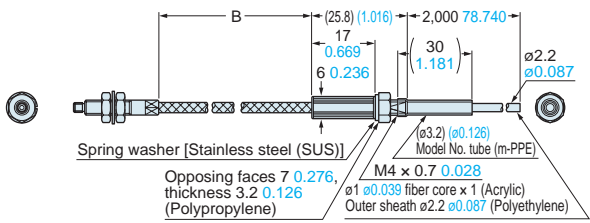


| Model No. | A | B |
|---------------------|---|---|
| FT-H20-J20-S | 200 ⁺²⁵ ₀ 7.874 ^{+0.984} ₀ | 185 ⁺³⁰ ₀ 7.284 ^{+1.181} ₀ |
| FT-H20-J30-S | 300 ⁺²⁵ ₀ 11.811 ^{+0.984} ₀ | 285 ⁺³⁰ ₀ 11.221 ^{+1.181} ₀ |
| FT-H20-J50-S | 500 ⁺²⁵ ₀ 19.685 ^{+0.984} ₀ | 485 ⁺³⁰ ₀ 19.095 ^{+1.181} ₀ |


Note: Ordinary temperature side fiber (FT-42) only.

FT-H20-VJ50-S FT-H20-VJ80-S Free-cut (Note)

Heat-resistant side unit diagram (side view)

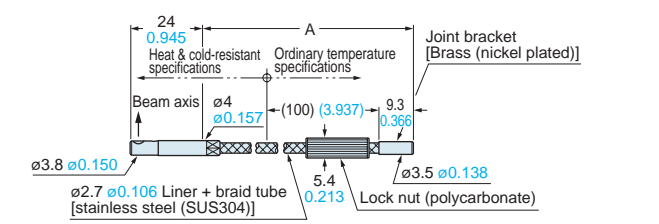


Ordinary temperature side fiber (FT-42) connection diagram (front view)

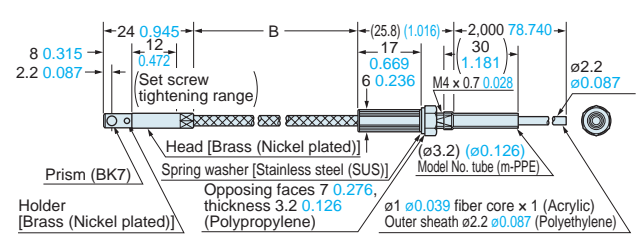


| Model No. | A | B |
|----------------------|---|---|
| FT-H20-VJ50-S | 500 ⁺²⁵ ₀ 19.685 ^{+0.984} ₀ | 485 ⁺³⁰ ₀ 19.095 ^{+1.181} ₀ |
| FT-H20-VJ80-S | 800 ⁺⁵⁰ ₀ 31.496 ^{+1.969} ₀ | 785 ⁺⁵⁵ ₀ 30.906 ^{+2.165} ₀ |

Note: Ordinary temperature side fiber (FT-42) only.


FT-H20-M1

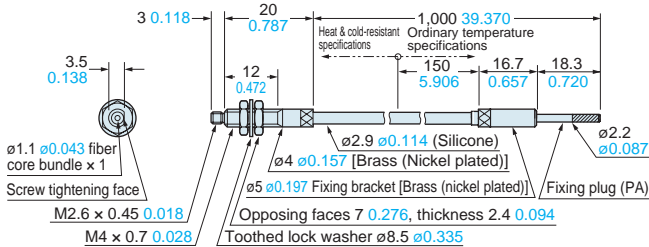


FT-H20W-M1

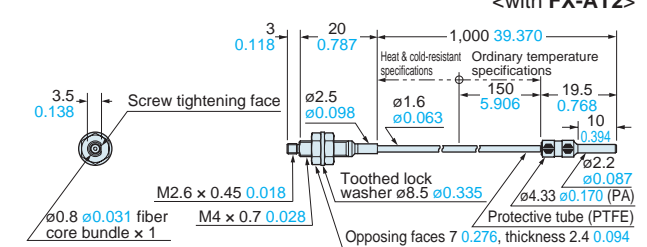

FT-H30-M1V-S

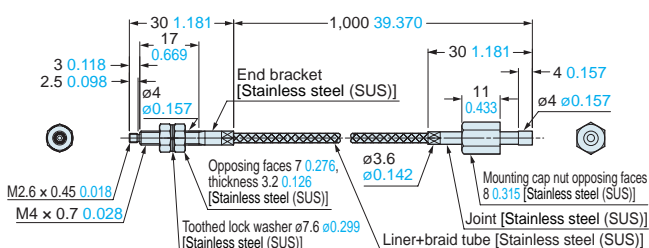


FT-H35-M2

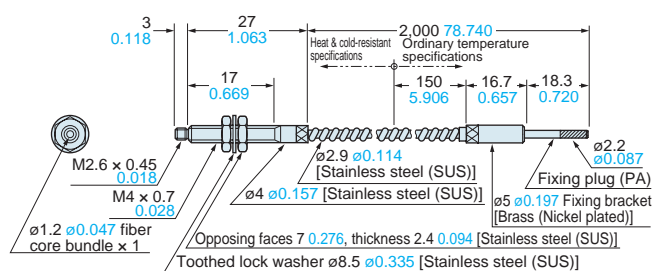


Note: The **FT-H30-M1V-S** is a set with the **FT-H30-M1V**, photo-terminal, and atmospheric side fiber. Refer to p.66 for dimensions of the atmospheric side fiber and photo-terminals.

FT-H35-M2S6

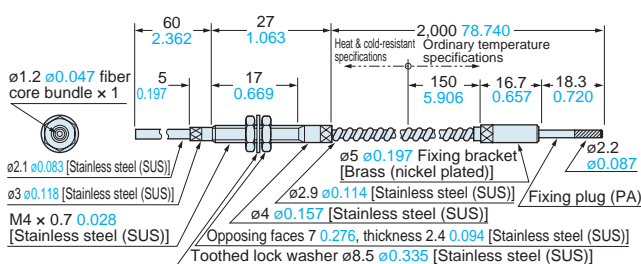











FT-HL80Y Free-cut

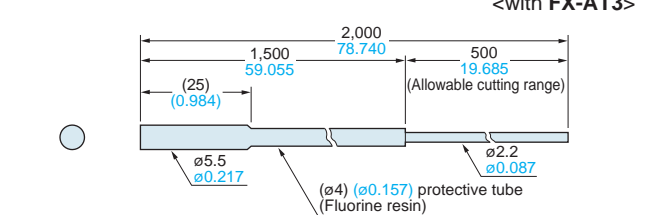

DIMENSIONS (Unit: mm in) Refer to the **FX-500 series (p.96)**, **FX-100 series (p.110)** for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.

Thru-beam type fibers

Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.

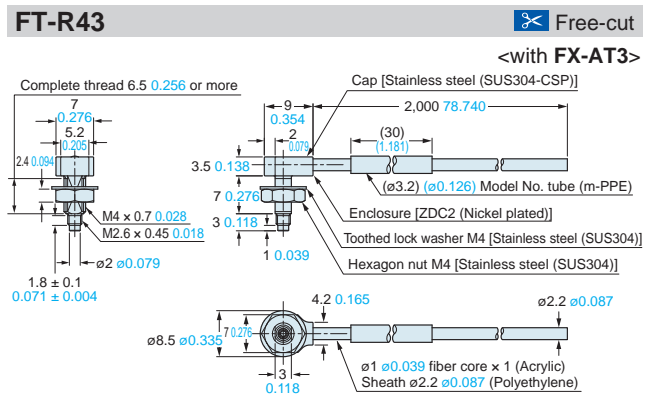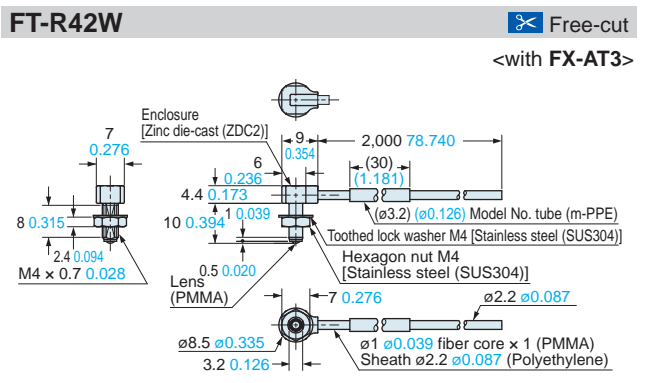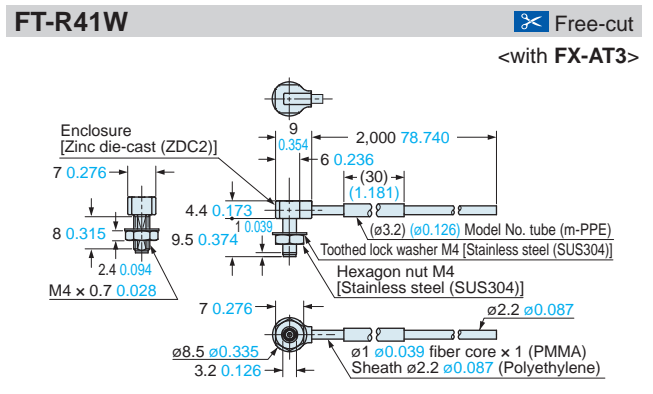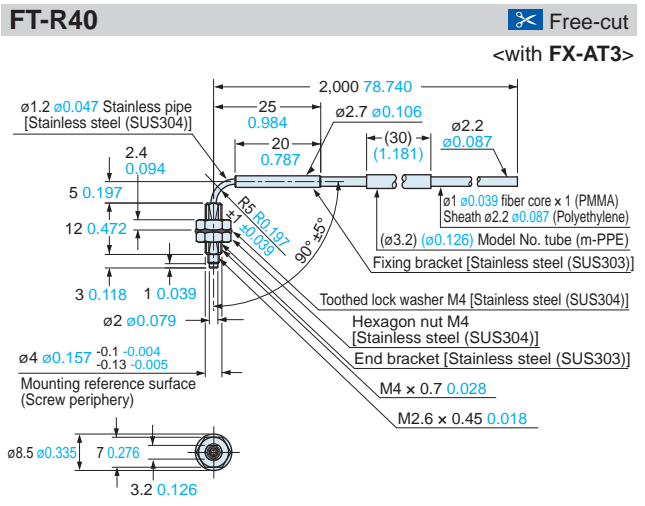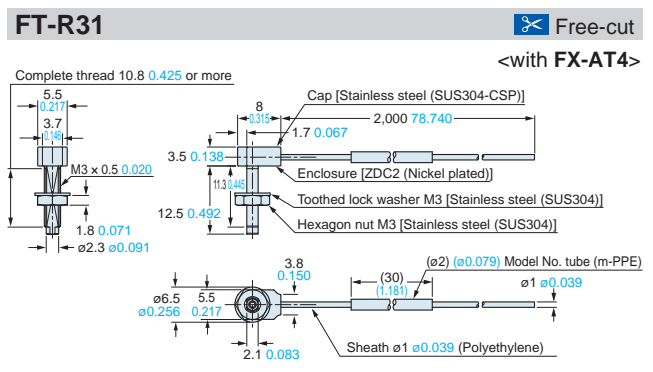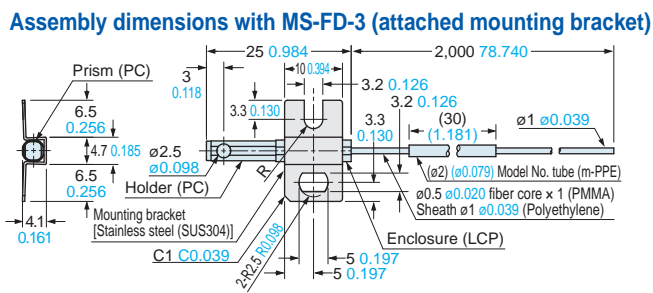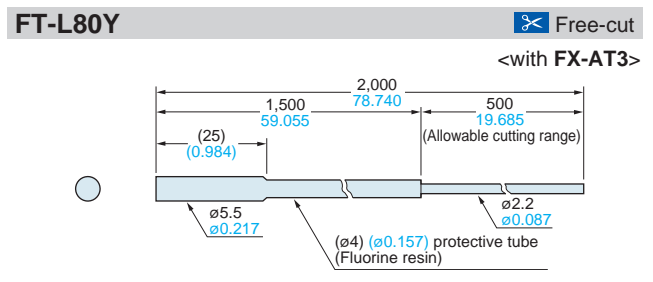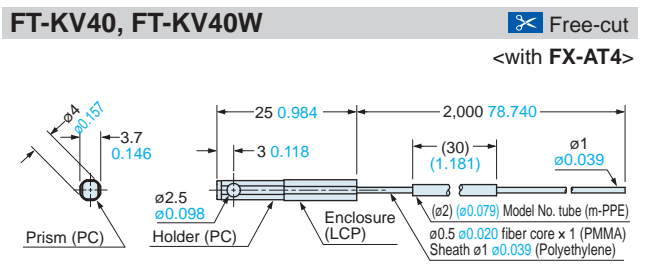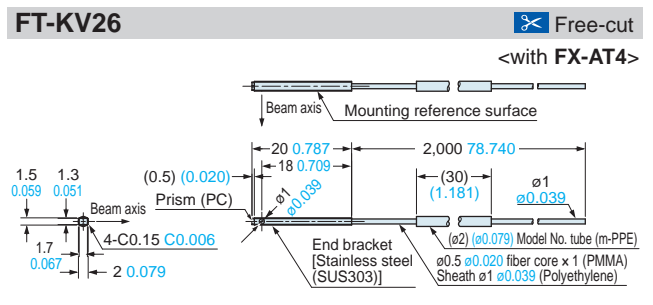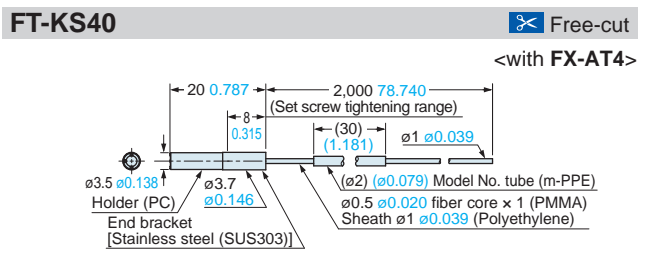

New product introduction
 Tough Fiber

Fiber Selection Guide
 Model
 Choose by shape/application
 How to read Model No.
 Earlier models comparison table

Fibers
 Super Quality
 Threaded Type
 Square Head Type
 Cylindrical Type
 Sleeve
 Flat Type
 Small Spot
 Narrow Beam
 Wide Beam
 Convergent Reflective Type
 Retroreflective Type
 Chemical / Oil-resistant
 Heat-resistant
 Vacuum-resistant
 Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
 Thru-beam Type
 Retroreflective Type
 Reflective Type
 Others

Amplifiers
 FX-500 series
 FX-100 series

INDEX

DIMENSIONS (Unit: mm in)

Refer to the FX-500 series (p.96), FX-100 series (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.


Thru-beam type fibers



Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.


FT-R44Y

Free-cut
<with FX-AT3>

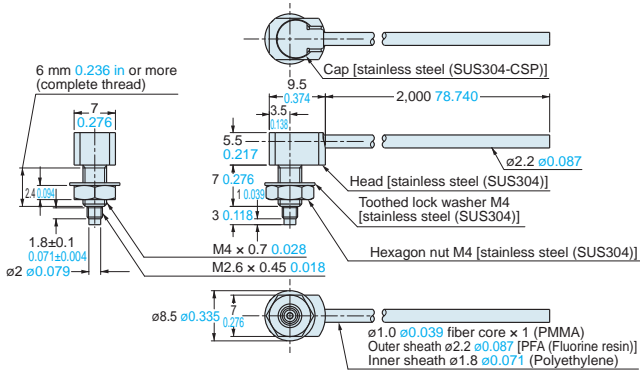


FT-R60Y

Free-cut
<with FX-AT3>

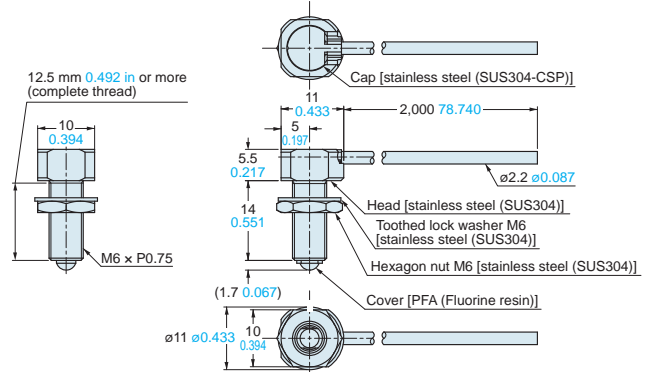


FT-S11

<with FX-AT2>

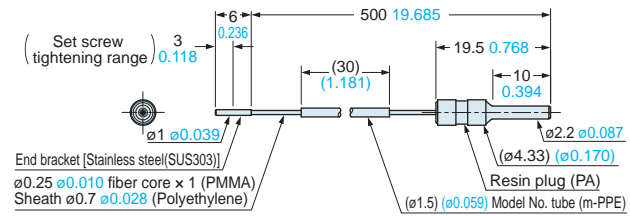


FT-S20

<with FX-AT2>

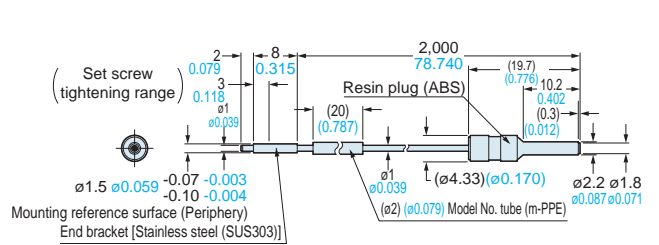


FT-S21

Free-cut
<with FX-AT4>

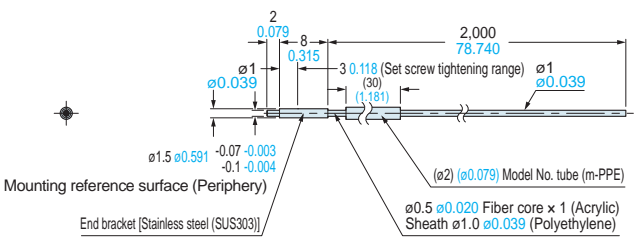


FT-S21W

Free-cut
<with FX-AT4>

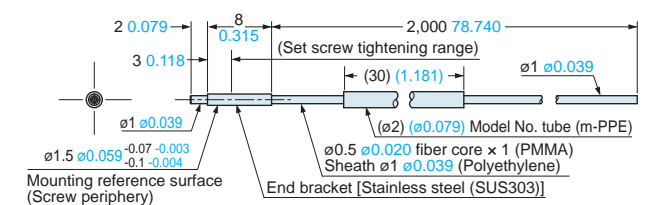


FT-S30

<with FX-AT2>

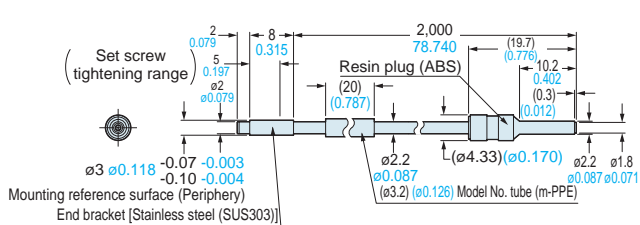


FT-S31W

Free-cut
<with FX-AT3>

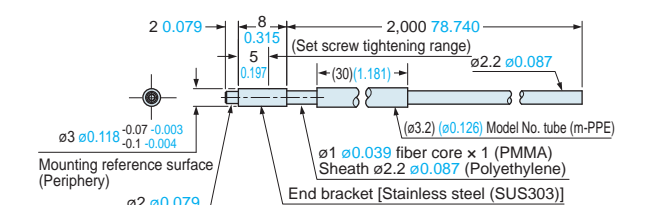


FT-S32

Free-cut
<with FX-AT3>

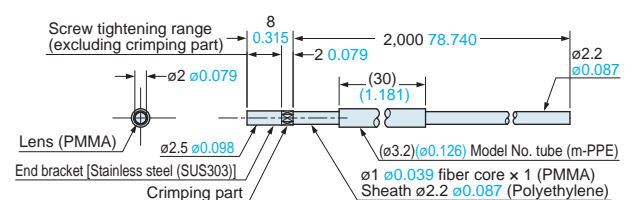

FT-V23

Free-cut
<with FX-AT5>

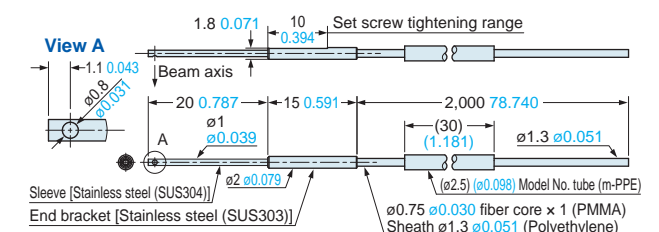


DIMENSIONS (Unit: mm in) Refer to the **FX-500 series (p.96)**, **FX-100 series (p.110)** for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.


Thru-beam type fibers

Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.


FT-V24W Free-cut
 <with FX-AT4>

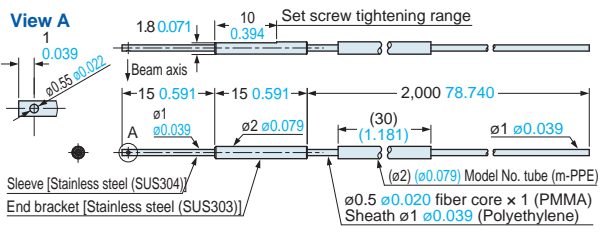


FT-V25 Free-cut
 <with FX-AT4>

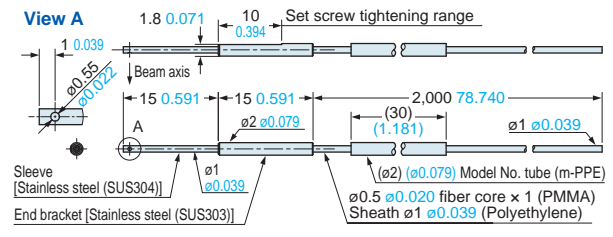


FT-V30 Free-cut
 <with FX-AT3>

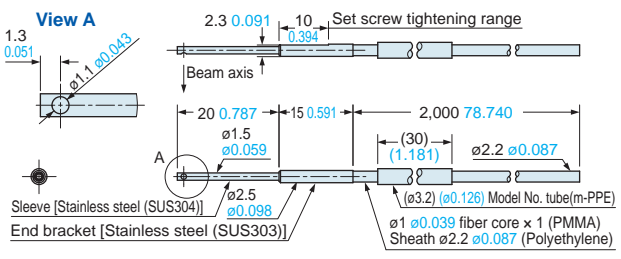


FT-V40 Free-cut
 <with FX-AT3>

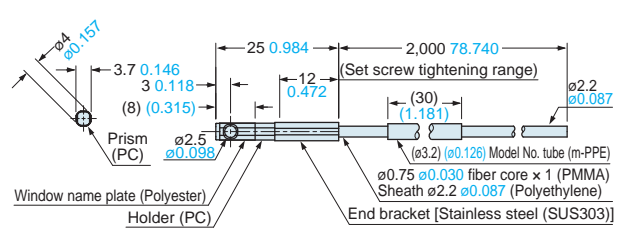


FT-V80Y Free-cut
 <with FX-AT3>

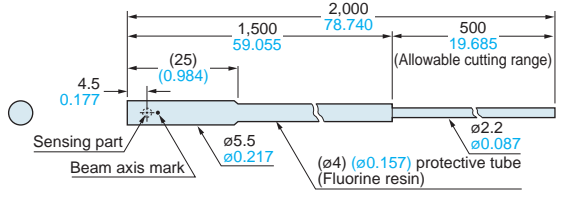


FT-Z20HBW Free-cut
 <with FX-AT4>

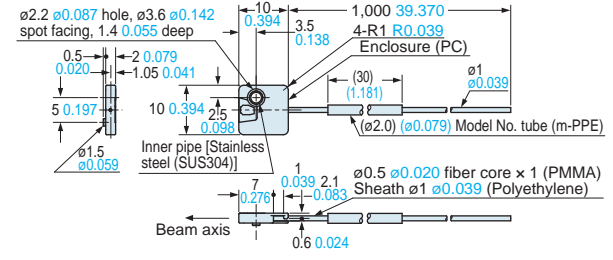


FT-Z20W Free-cut
 <with FX-AT4>

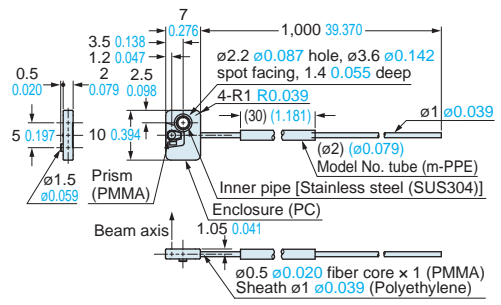

FT-Z30 Free-cut
 <with FX-AT5>

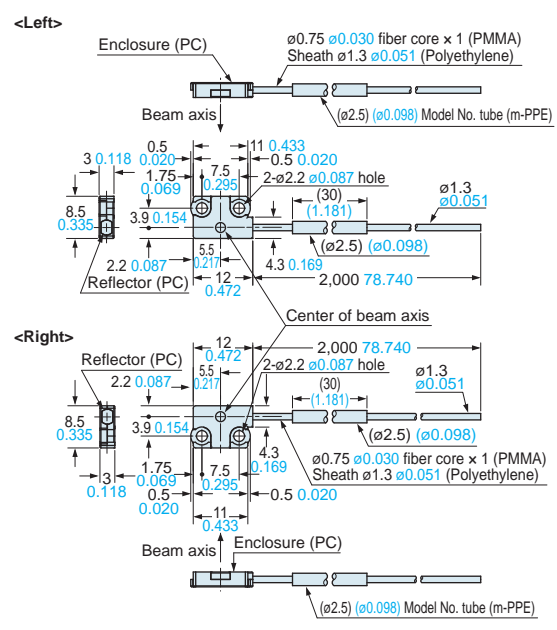

FT-Z30E Free-cut
 <with FX-AT5>

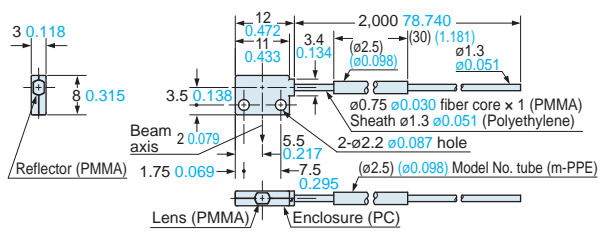

New product introduction
 Tough Fiber
 Fiber Selection Guide
 Model
 Choose by shape/application
 How to read Model No.
 Earlier models comparison table
 Fibers
 Super Quality
 Threaded Type
 Square Head Type
 Cylindrical Type
 Sleeve
 Flat Type
 Small Spot
 Narrow Beam
 Wide Beam
 Convergent Reflective Type
 Retroreflective Type
 Chemical / Oil-resistant
 Heat-resistant
 Vacuum-resistant
 Liquid Leak / Liquid Detection
 Fiber Options
 Semi-custom fibers
 Fiber Dimensions
 Thru-beam Type
 Retroreflective Type
 Reflective Type
 Others
 Amplifiers
 FX-500 series
 FX-100 series
 INDEX

DIMENSIONS (Unit: mm in)

Refer to the FX-500 series (p.96), FX-100 series (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.

Thru-beam type fibers




Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.

FT-Z30EW

Free-cut


<with FX-AT5>

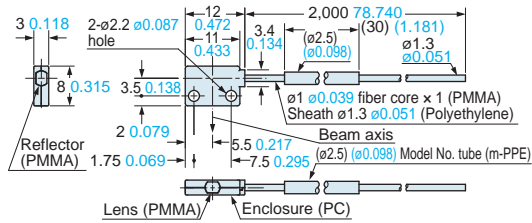

FT-Z30H

Free-cut


<with FX-AT5>

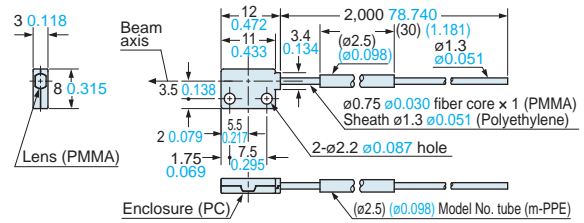

FT-Z30HW

Free-cut


<with FX-AT5>

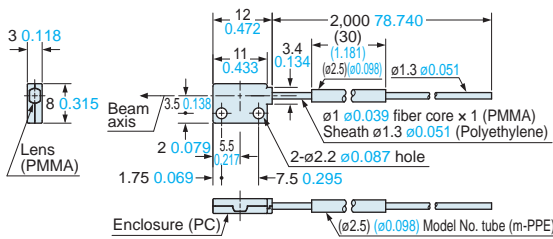

FT-Z30W

Free-cut


<with FX-AT5>

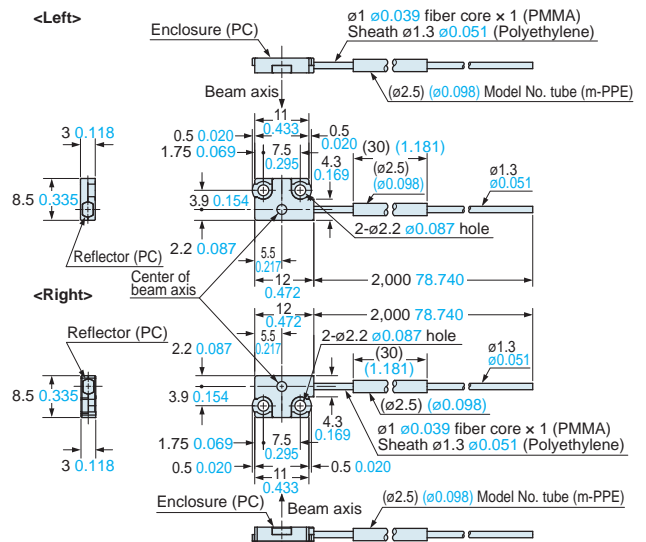

FT-Z40HBW

Free-cut


<with FX-AT5>

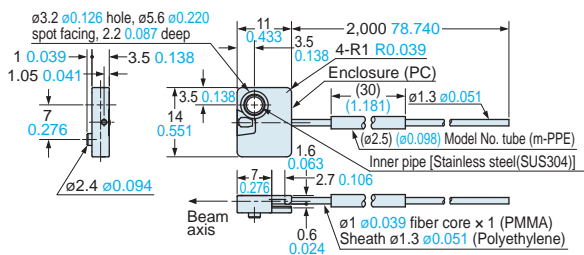

FT-Z40W

Free-cut


<with FX-AT5>

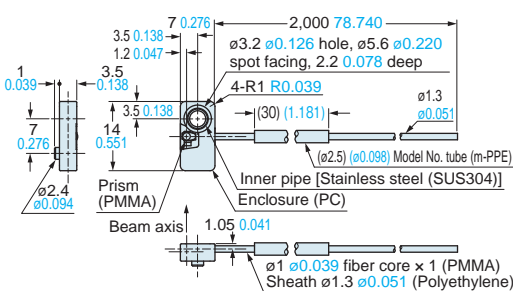

FT-Z802Y

Free-cut

<with FX-AT3>

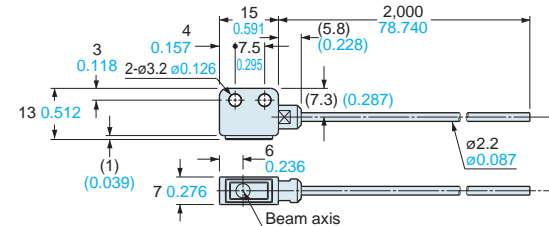

DIMENSIONS (Unit: mm in) Refer to the **FX-500 series (p.96)**, **FX-100 series (p.110)** for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.

Retroreflective type fibers

Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options


Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others


Amplifiers
FX-500 series
FX-100 series

INDEX


FR-KZ22E Free-cut <with FX-AT4>

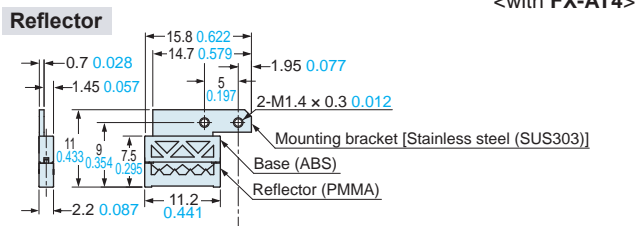


FR-KZ50E Free-cut <with FX-AT4>

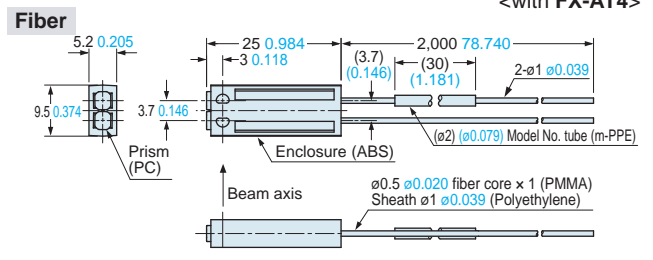


Assembly dimensions with MS-FD-2 (attached mounting bracket)

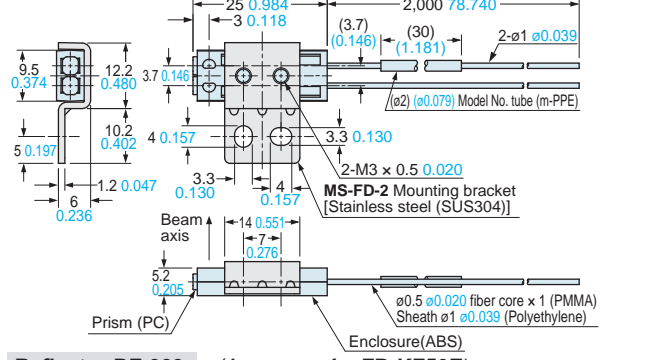


FR-KZ50H Free-cut <with FX-AT4>

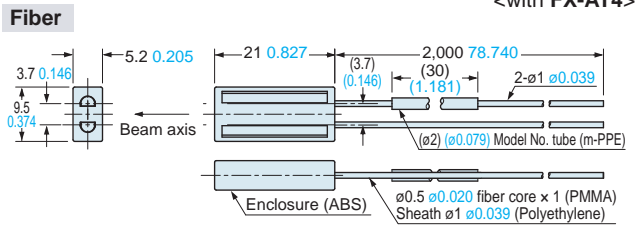


Assembly dimensions with MS-FD-2 (attached mounting bracket)

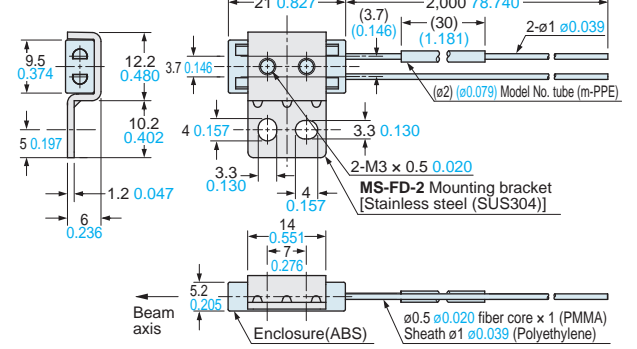


Reflector RF-003 (Accessory for FR-KZ50E)

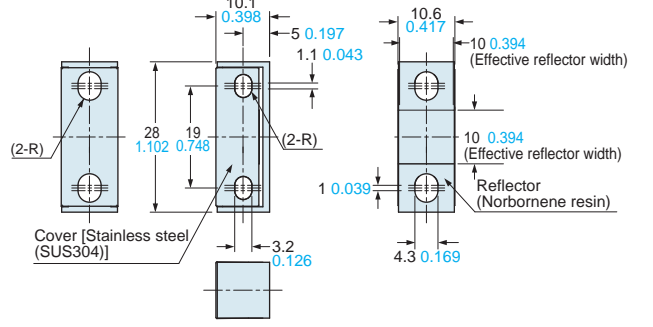


Reflector RF-003 (Accessory for FR-KZ50H)

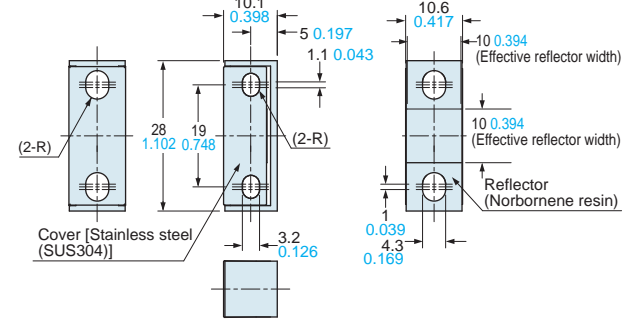


FR-Z50HW Free-cut <with FX-AT3>

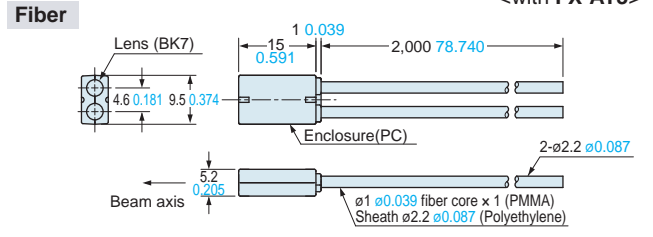

Assembly dimensions with MS-FD-2 (attached mounting bracket)

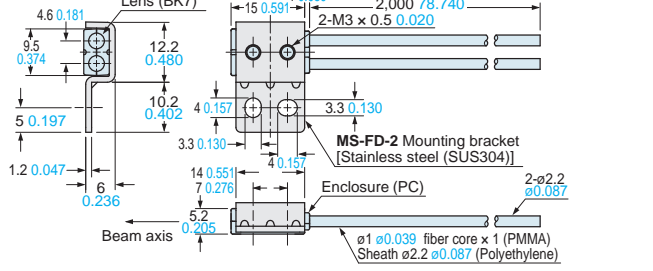

Reflective tape RF-13 (Accessory for FR-Z50HW)

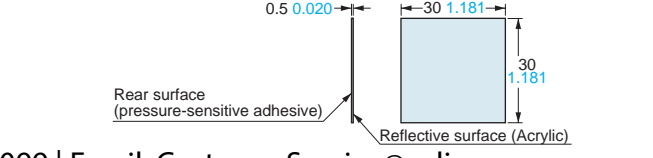











DIMENSIONS (Unit: mm in)

Refer to the FX-500 series (p.96), FX-100 series (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.

Reflective type fibers











Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.

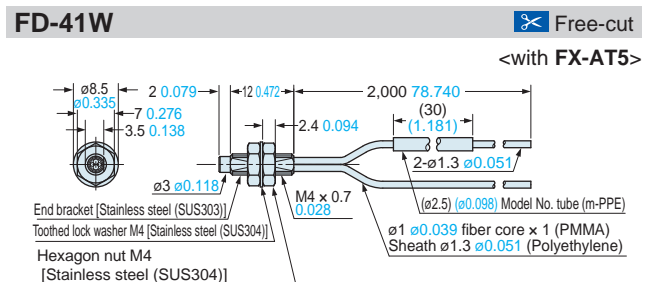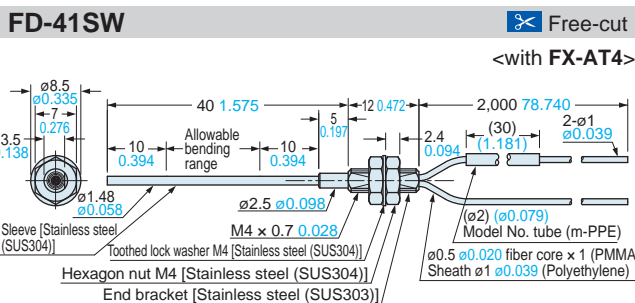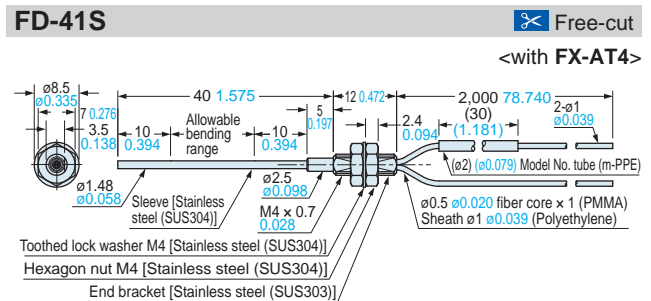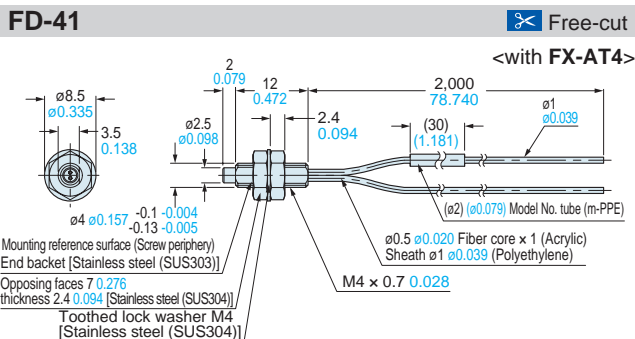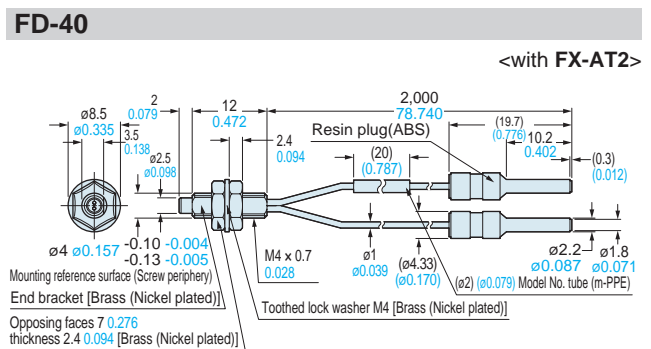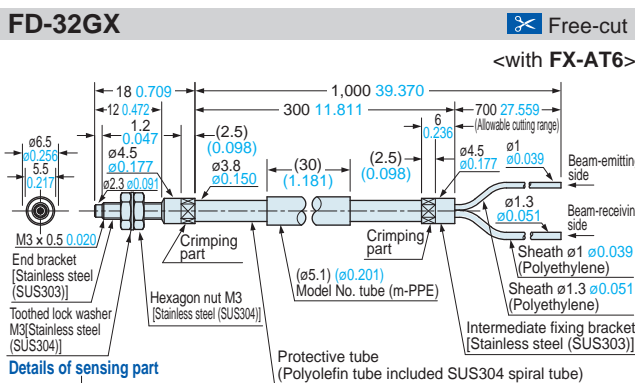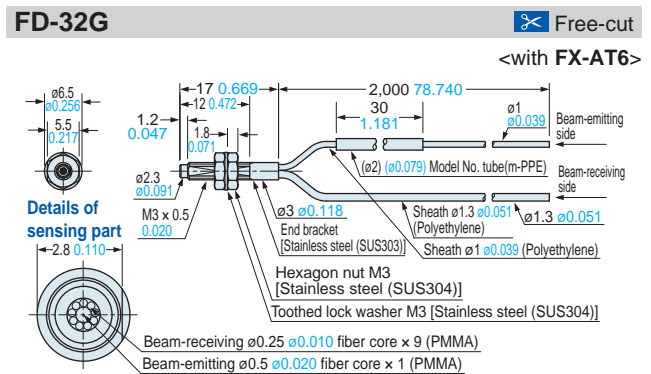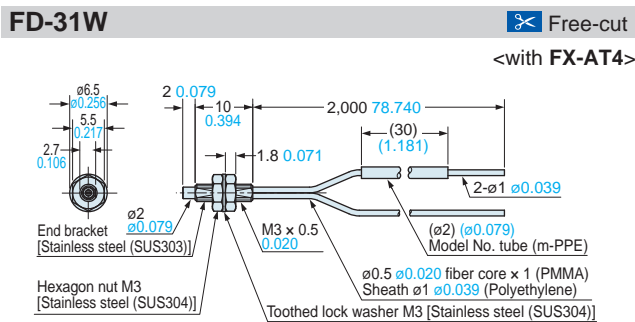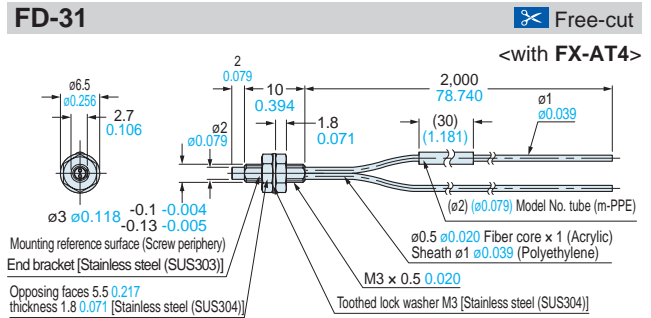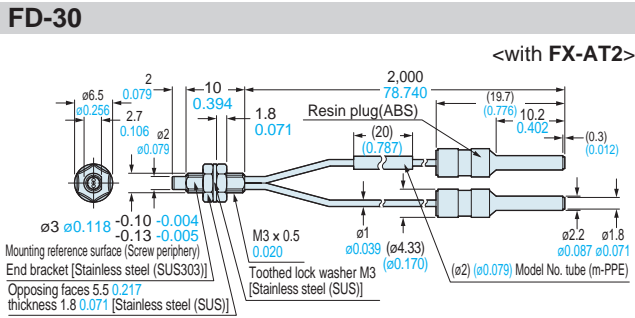

DIMENSIONS (Unit: mm in) Refer to the **FX-500 series** (p.96), **FX-100 series** (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.

Reflective type fibers 

Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.

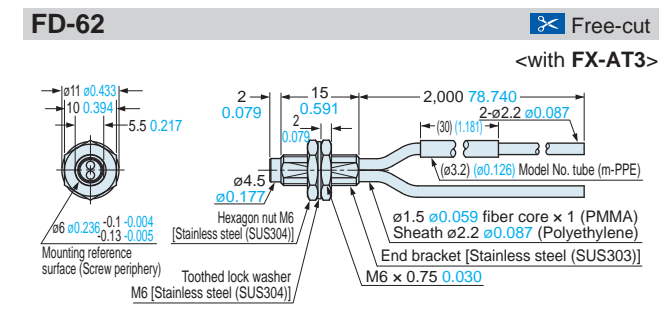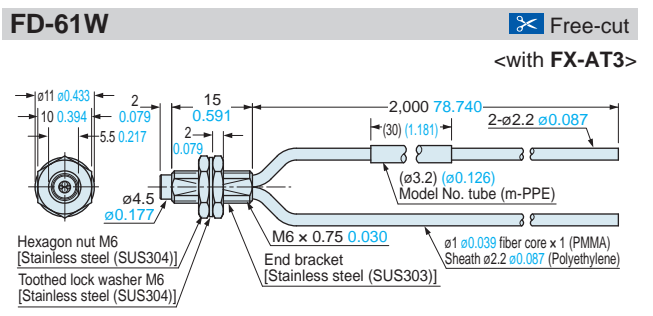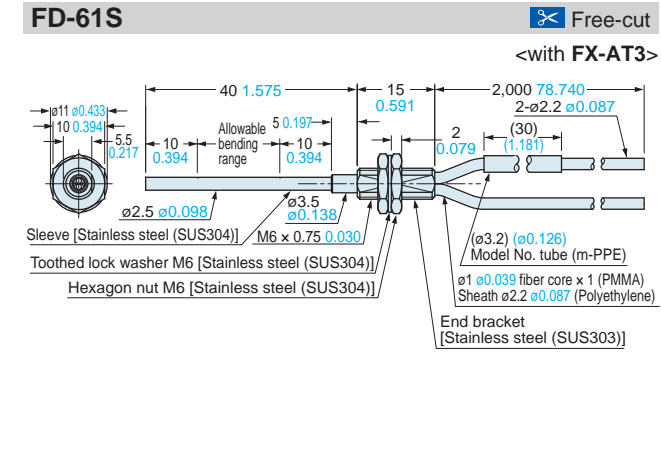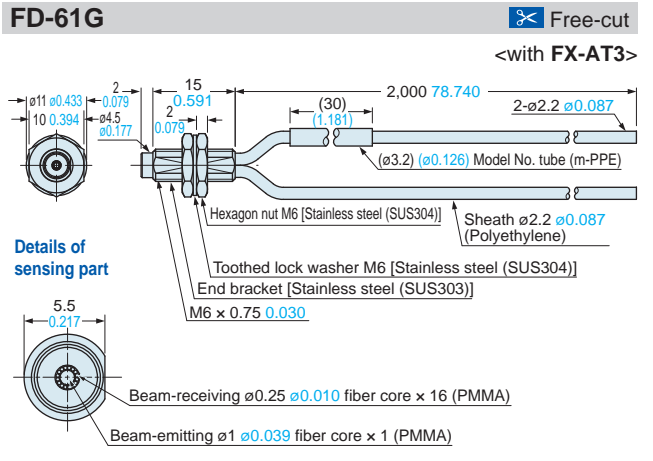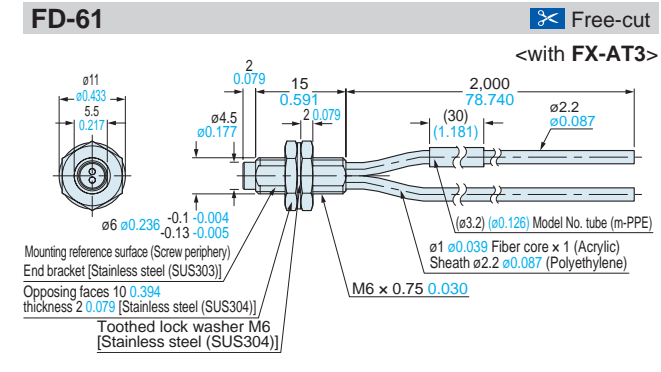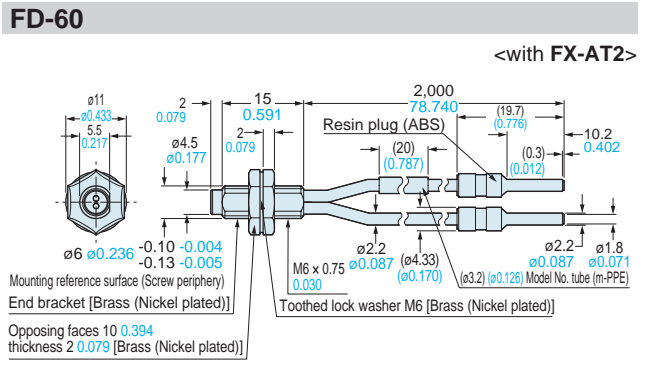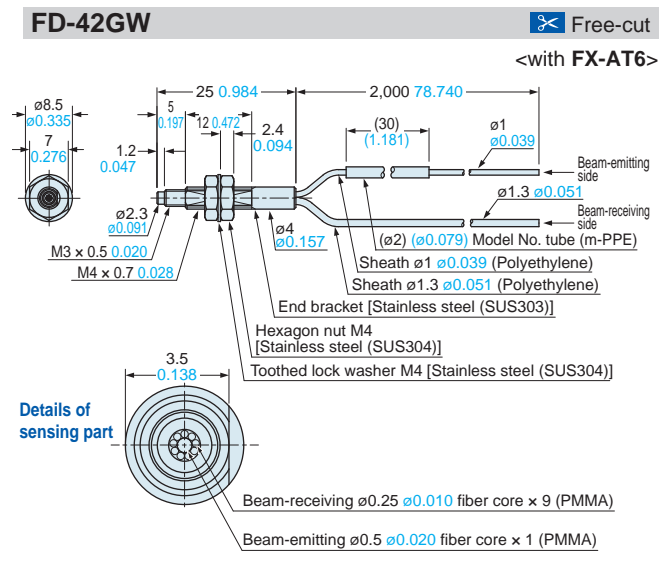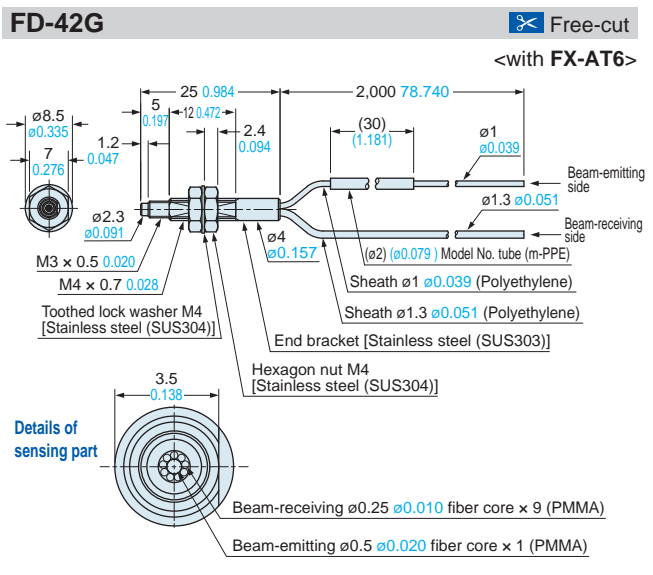

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type

Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series

INDEX

DIMENSIONS (Unit: mm in)


Refer to the **FX-500 series** (p.96), **FX-100 series** (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.

Reflective type fibers



Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.


FD-64X

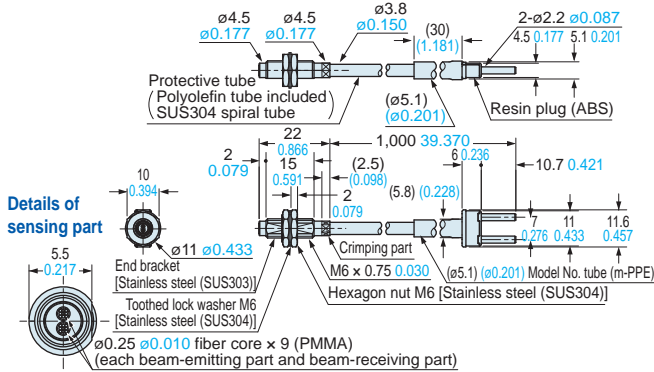

FD-A16

Free-cut


<with FX-AT3>

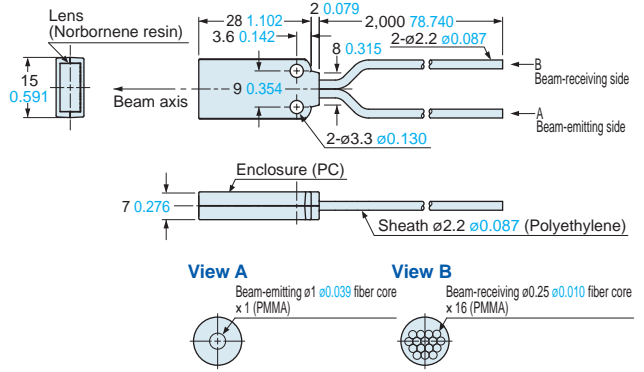


FD-AL11

Free-cut


<with FX-AT3>

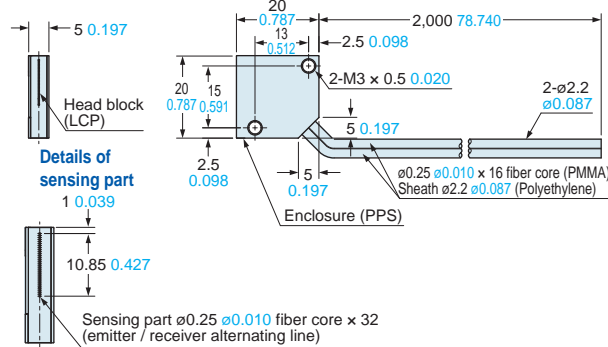


FD-E13

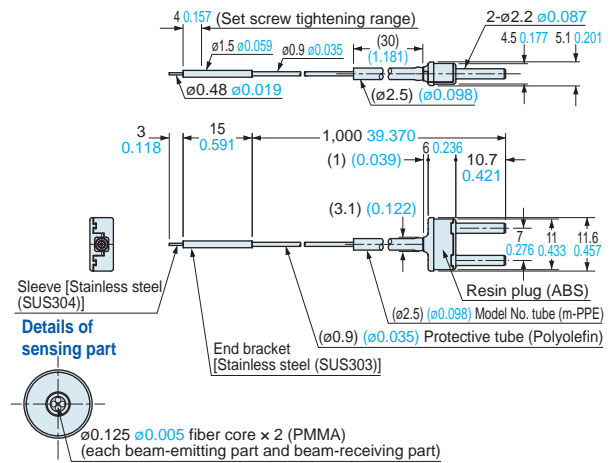

FD-E23

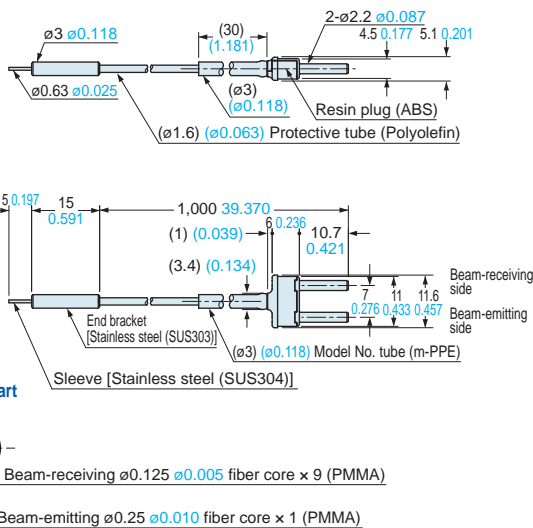

FD-EG30

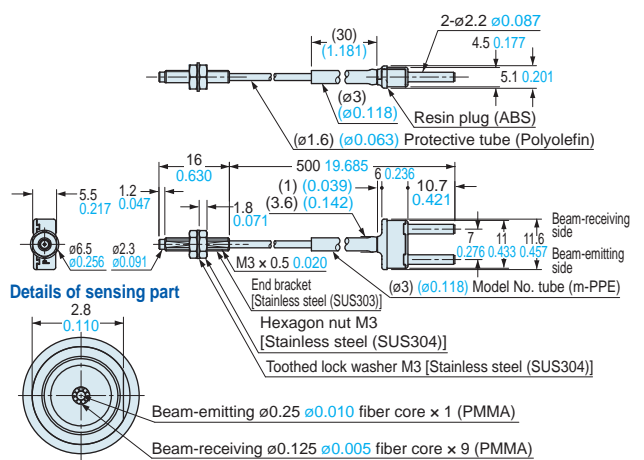


DIMENSIONS (Unit: mm in) Refer to the **FX-500 series** (p.96), **FX-100 series** (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.


Reflective type fibers 

Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.


FD-EG30S

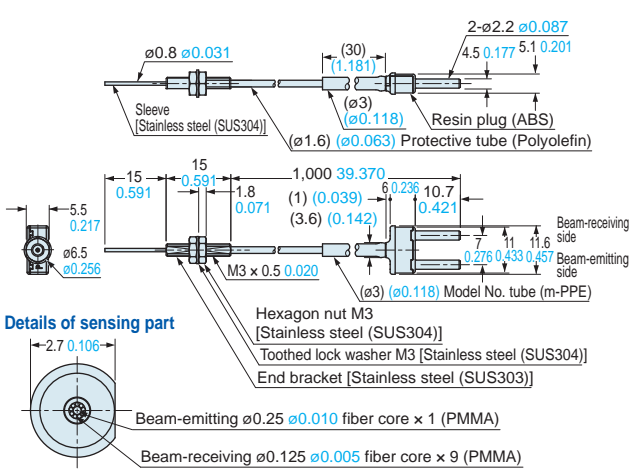


FD-EG31

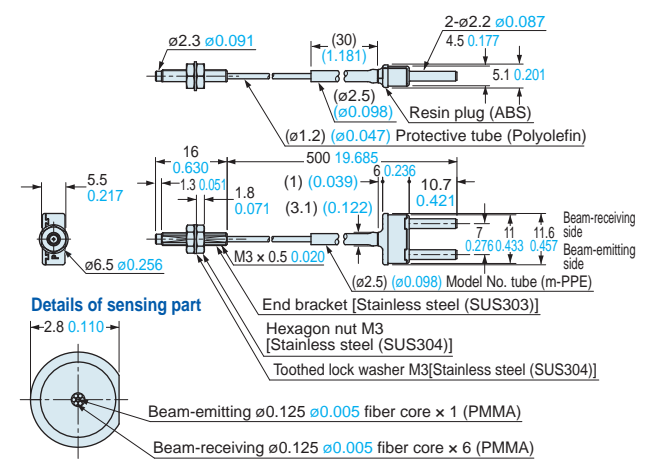


FD-F4, FD-F41  Free-cut

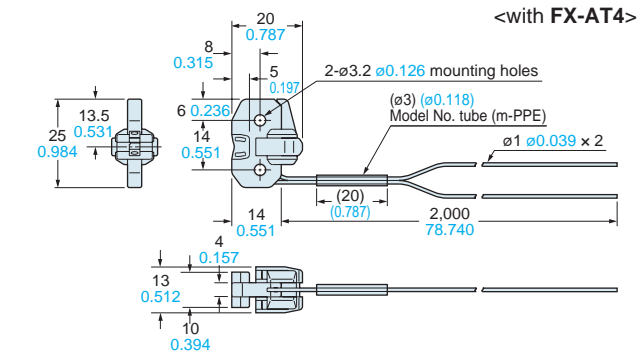


FD-F41Y  Free-cut

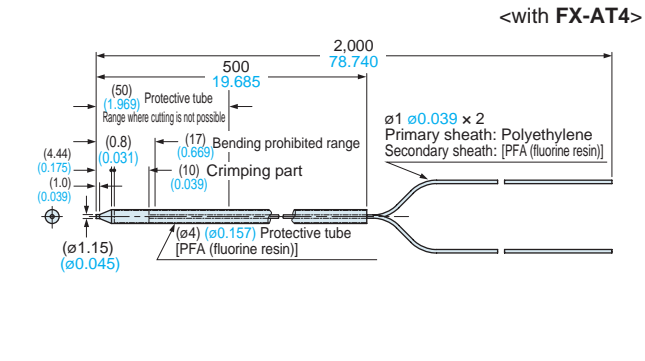


FD-F71  Free-cut

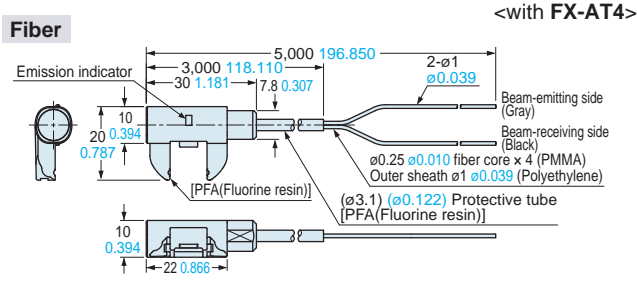


FD-F8Y  Free-cut

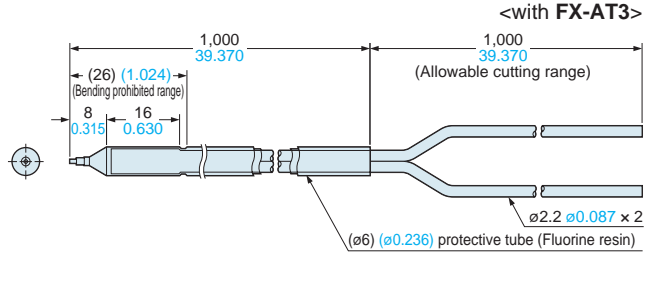


SUS mounting bracket




SUS mounting bracket (FD-71) mounting diagram




PVC mounting bracket



PVC mounting bracket (FD-71) mounting diagram



FD-FA93  Free-cut

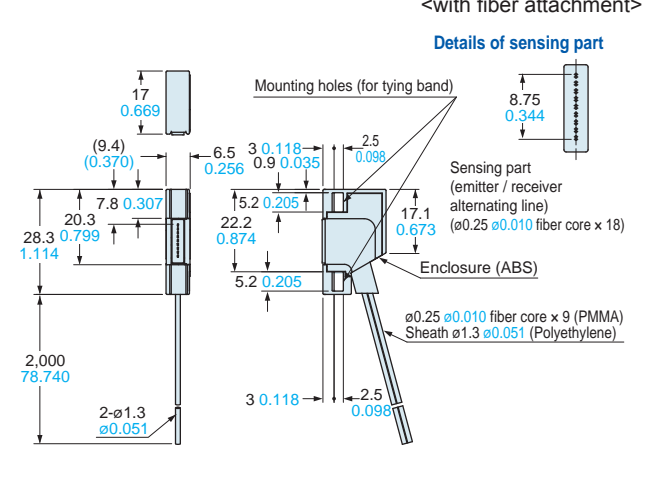

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options
Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series

INDEX

DIMENSIONS (Unit: mm in)

Refer to the FX-500 series (p.96), FX-100 series (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.

Reflective type fibers




Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.

FD-H13-FM2


Free-cut

Details of sensing part

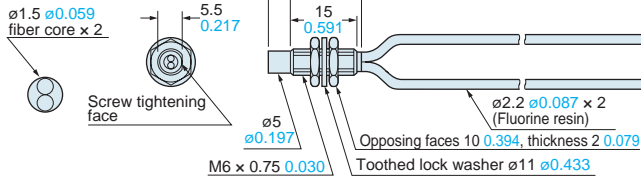


FD-H18-L31

Free-cut

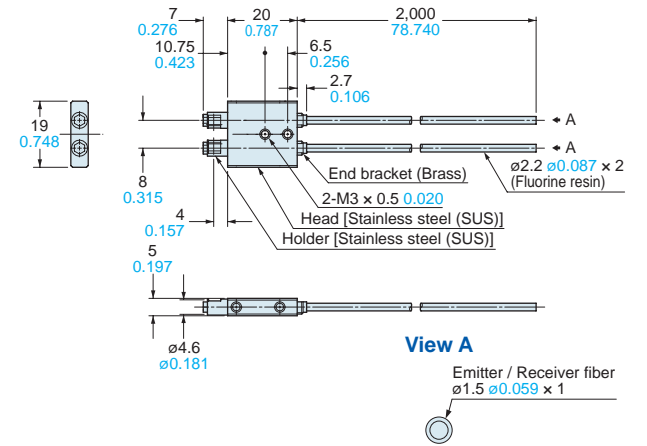


FD-H20-21

Details of sensing part

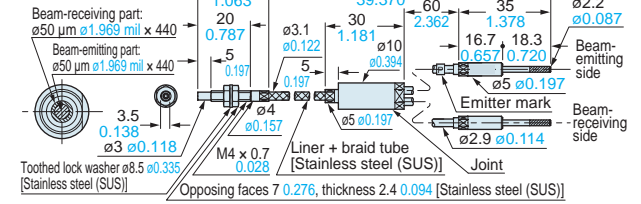


FD-H20-M1

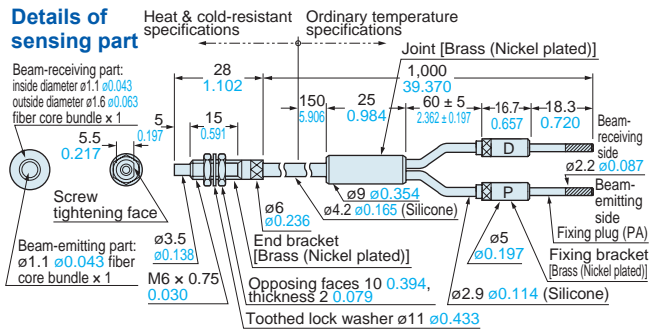


FD-H25-L43

<with FX-AT2>

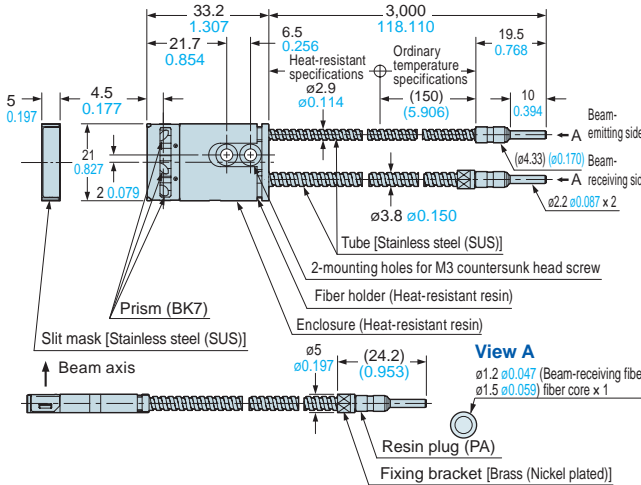

FD-H25-L45

<with FX-AT2>

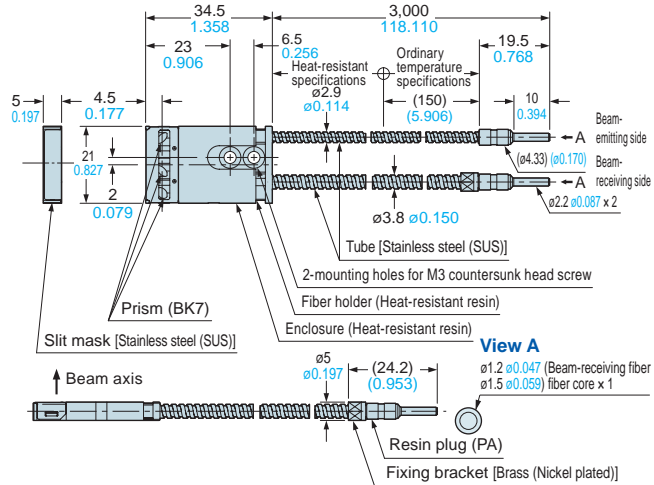

DIMENSIONS (Unit: mm in)


Refer to the **FX-500** series (p.96), **FX-100** series (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.

Reflective type fibers




Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.

FD-H30-KZ1V-S

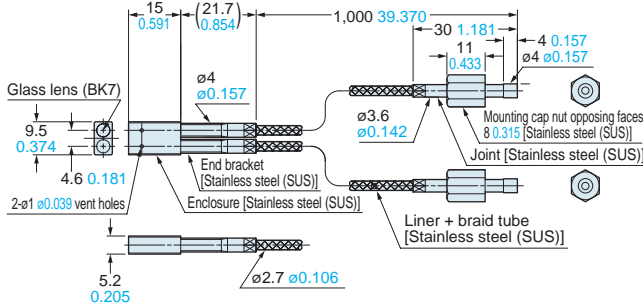


Assembly dimensions with MS-FD-2 (attached mounting bracket)

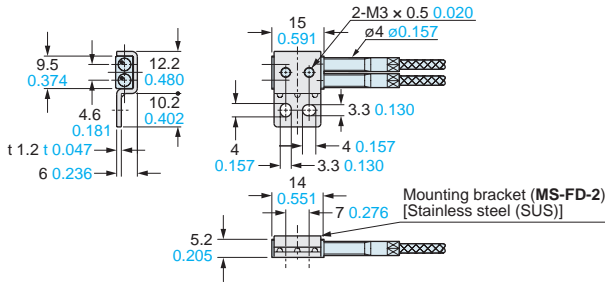


Note: The **FD-H30-KZ1V-S** is a set with the **FD-H30-KZ1V**, photo-terminal, and atmospheric side fiber. Refer to p.66 for dimensions of the atmospheric side fiber and photo-terminals.


FD-H30-L32

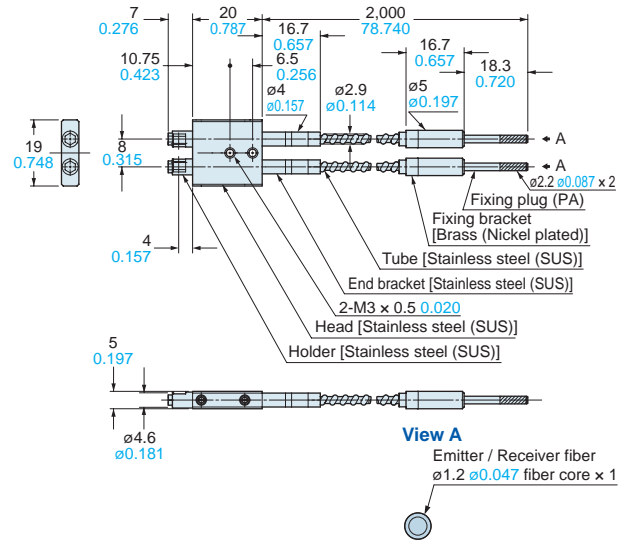


FD-H30-L32V-S

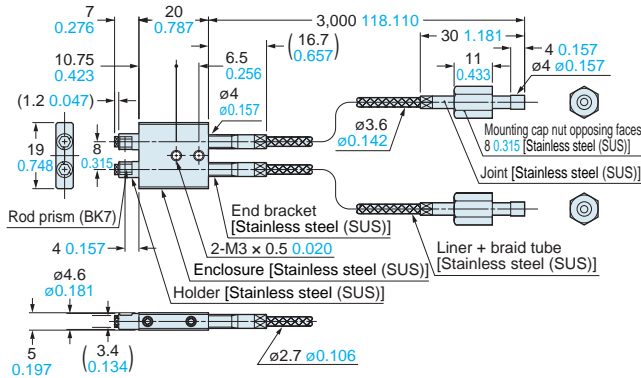


Note: The **FD-H30-L32V-S** is a set with the **FD-H30-L32V**, photo-terminal, and atmospheric side fiber. Refer to p.66 for dimensions of the atmospheric side fiber and photo-terminals.

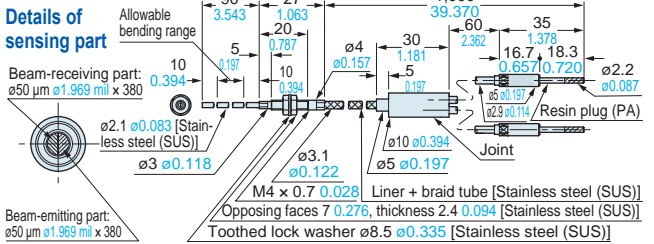


FD-H35-M2

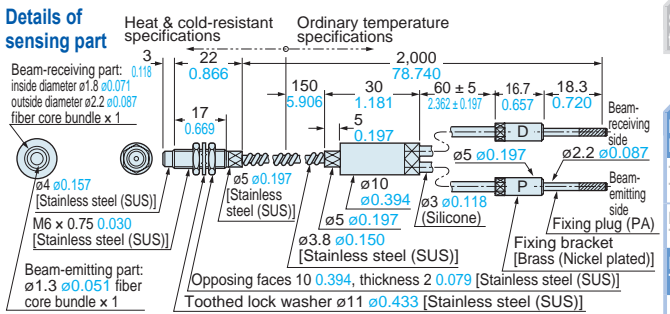

FD-H35-M2S6

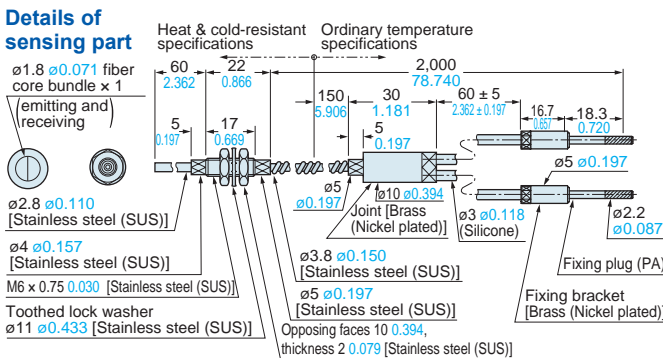

FD-HF40Y

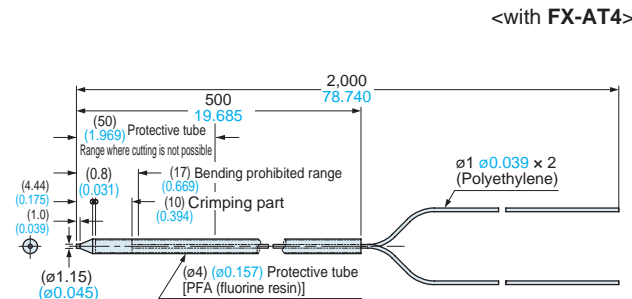

New product introduction
Tough Fiber

Fiber Selection Guide

Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers

FX-500 series

FX-100 series

INDEX

DIMENSIONS (Unit: mm in)


Refer to the FX-500 series (p.96), FX-100 series (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.

Reflective type fibers




Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.


FD-L10 Free-cut

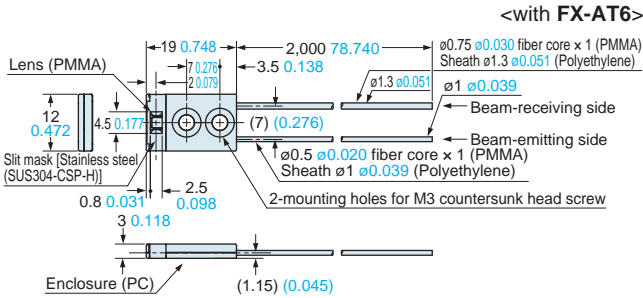


FD-L11 Free-cut

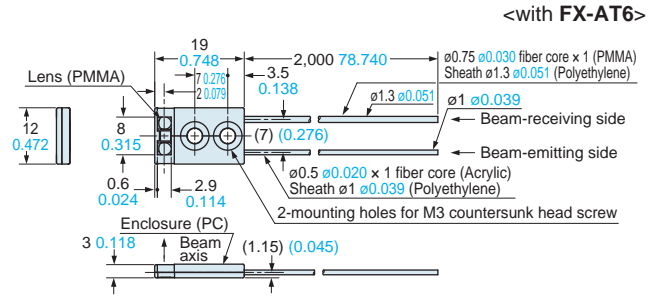


FD-L12W Free-cut

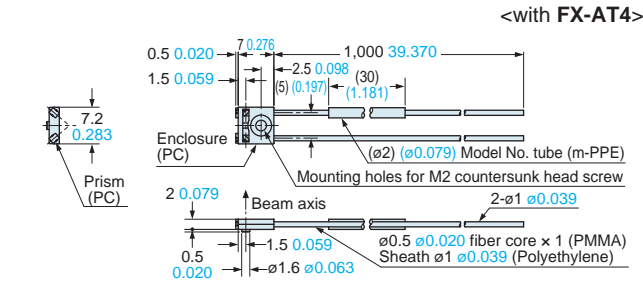


FD-L20H Free-cut

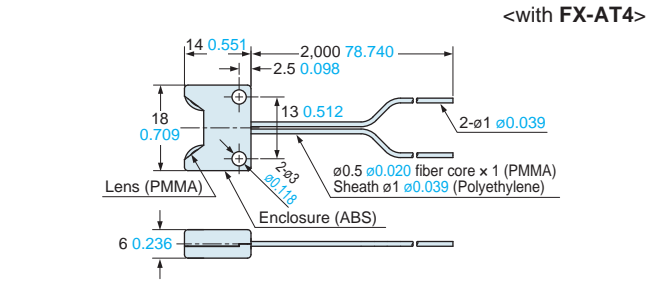


FD-L21 Free-cut

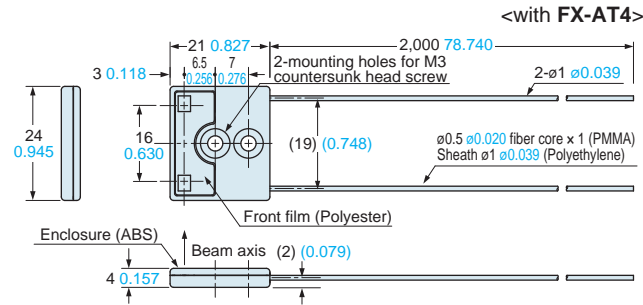


FD-L21W Free-cut

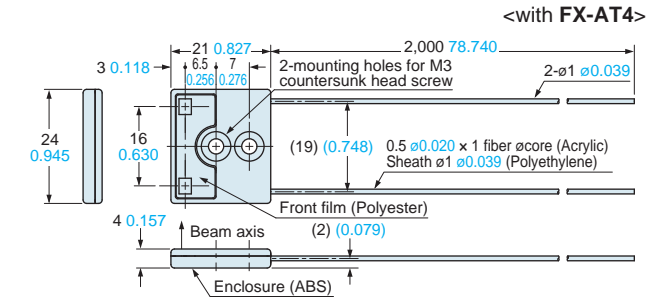


FD-L22A Free-cut

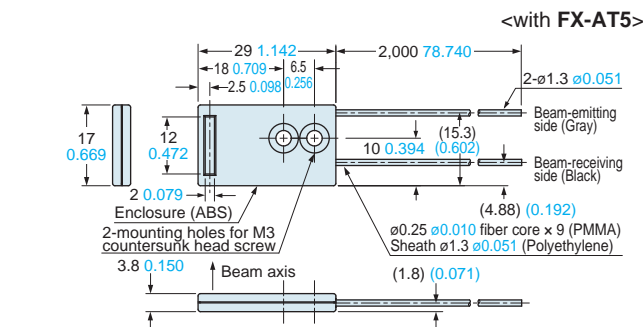


FD-L23 Free-cut

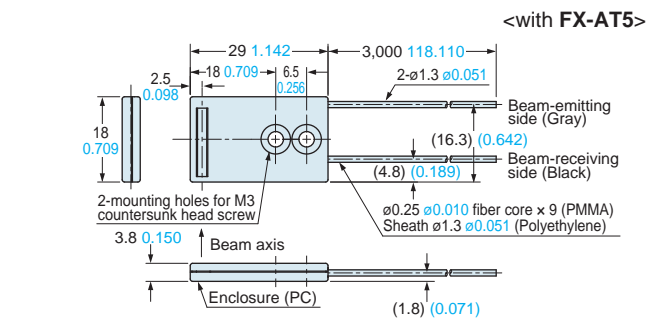

FD-L30A Free-cut

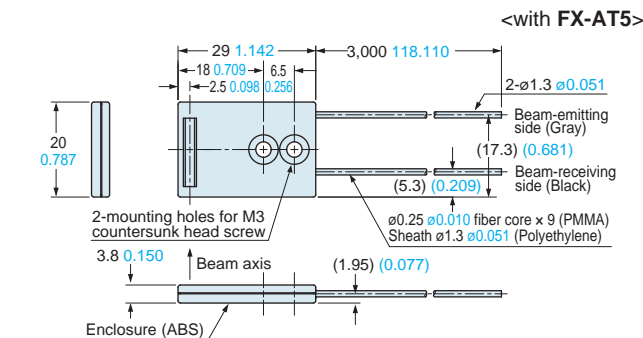

FD-L31A Free-cut

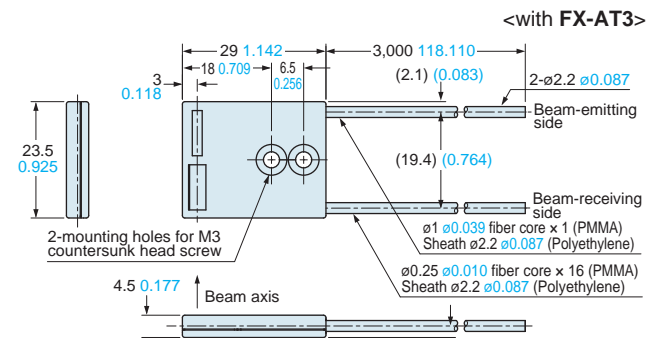


DIMENSIONS (Unit: mm in) Refer to the **FX-500 series** (p.96), **FX-100 series** (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.


Reflective type fibers

Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.


FD-L32H **Free-cut**

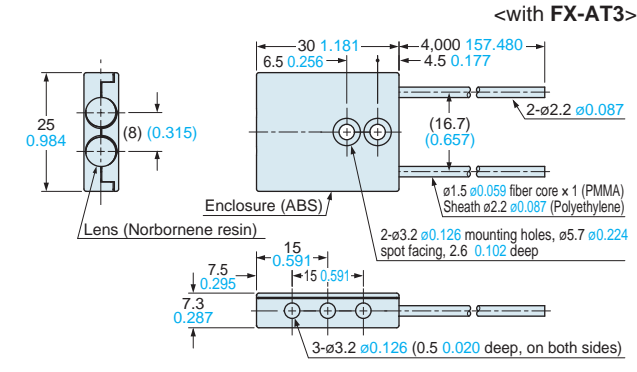


FD-R31G **Free-cut**

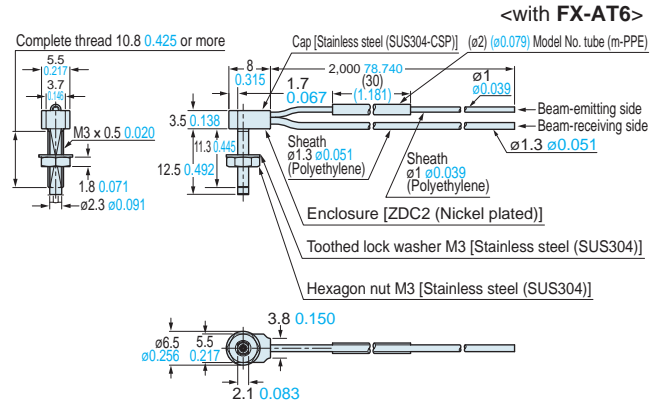


FD-R32EG, FD-R34EG

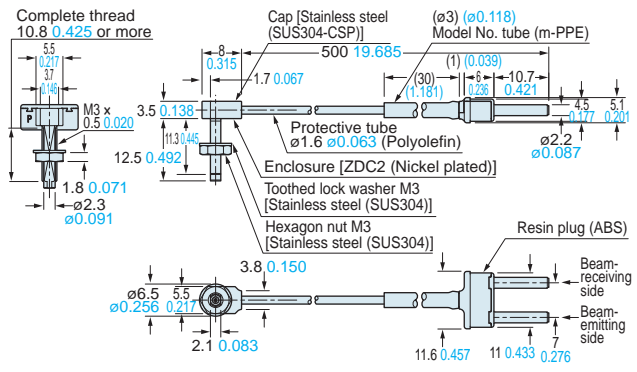


FD-R33EG

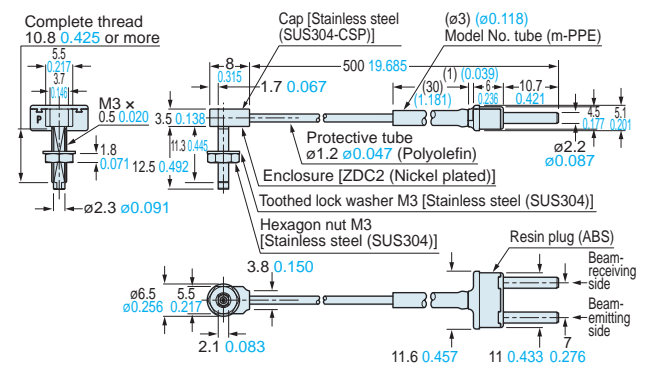


FD-R41 **Free-cut**

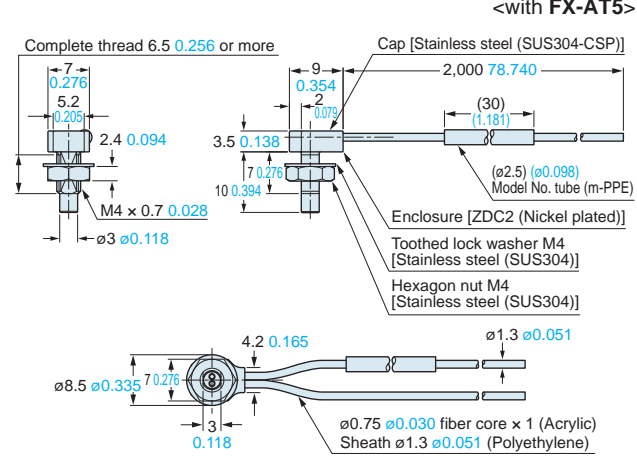


FD-R60 **Free-cut**

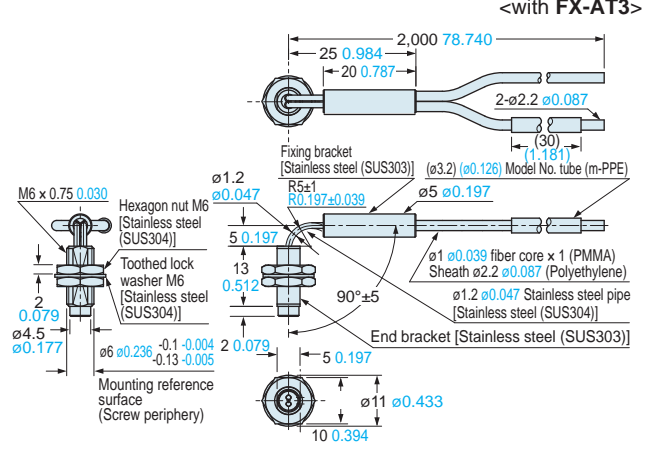

FD-R61Y **Free-cut**

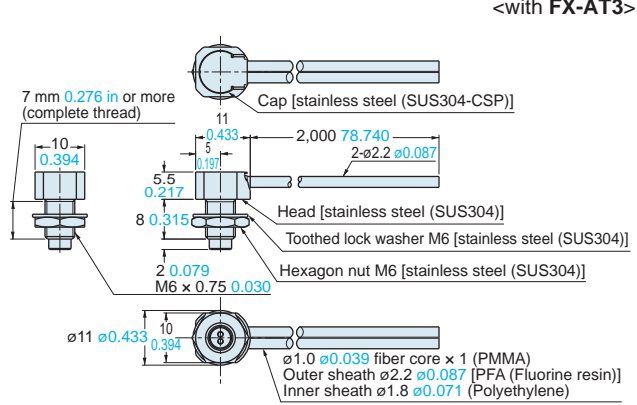

FD-S21

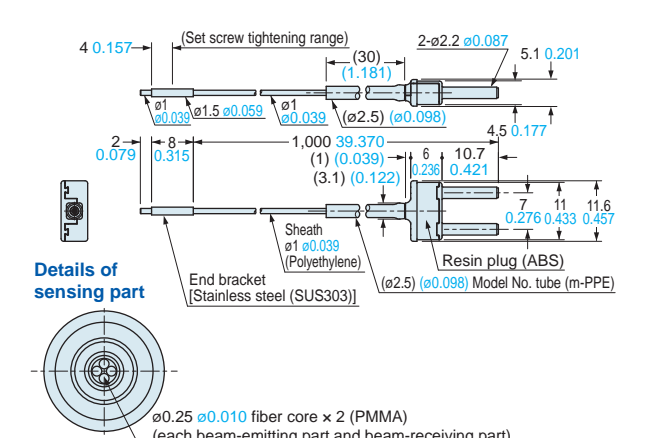

New product introduction

Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No.

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers

FX-500 series

FX-100 series

INDEX









DIMENSIONS (Unit: mm in)

Refer to the FX-500 series (p.96), FX-100 series (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.

Reflective type fibers



Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.

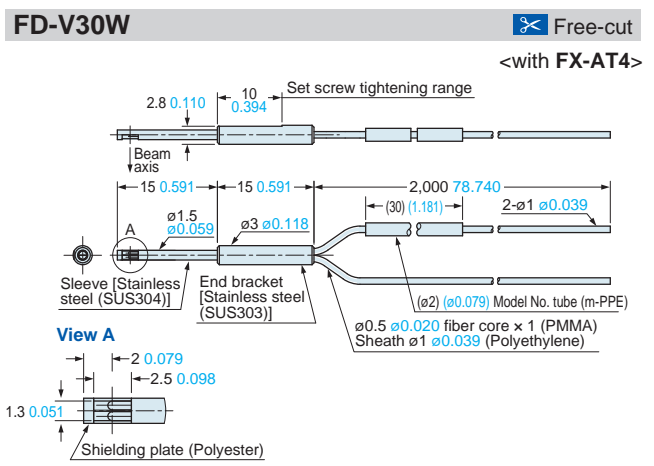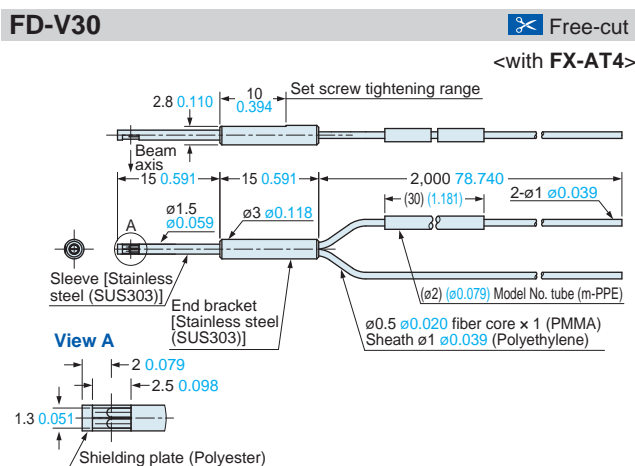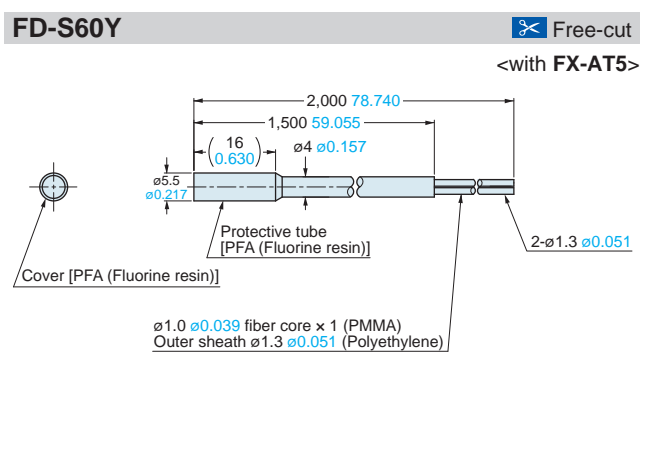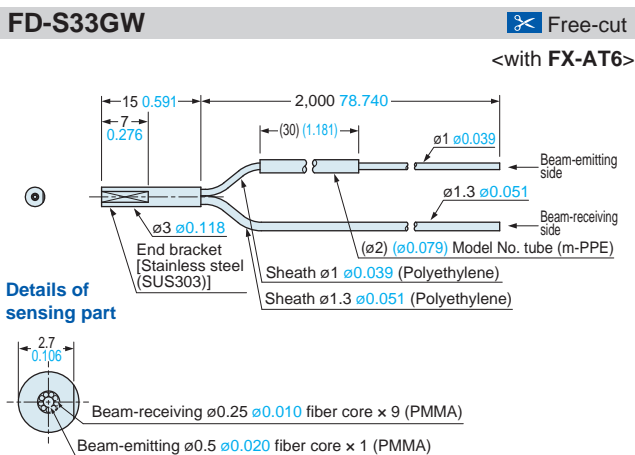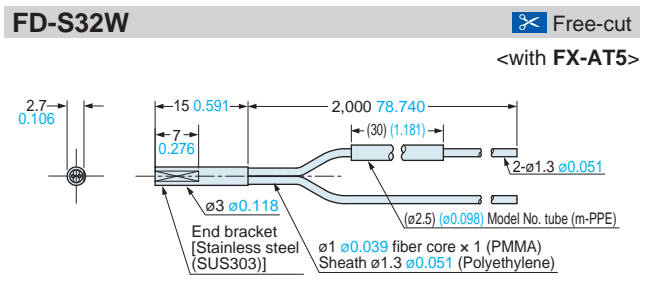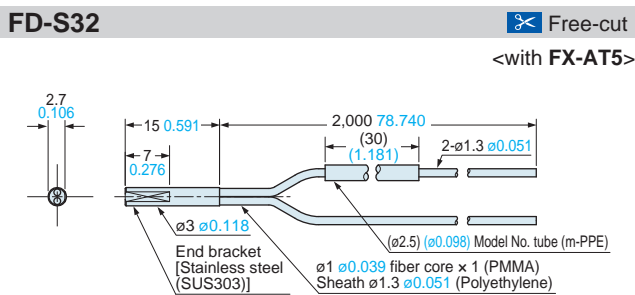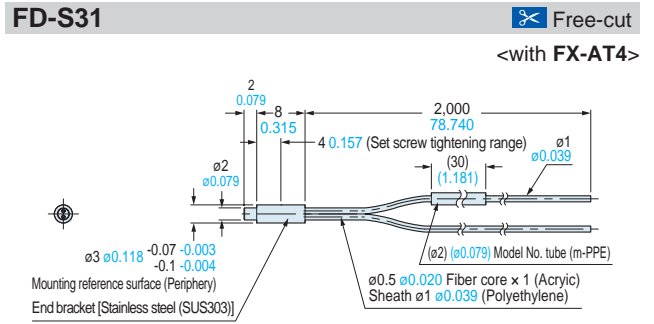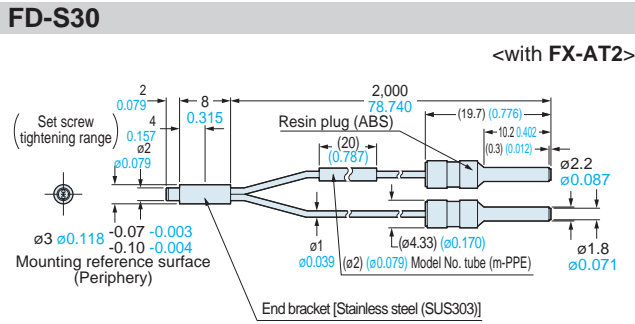


- New product introduction
- Tough Fiber
- Fiber Selection Guide
- Model
- Choose by shape/application
- How to read Model No
- Earlier models comparison table
- Fibers
- Super Quality
- Threaded Type
- Square Head Type
- Cylindrical Type
- Sleeve
- Flat Type
- Small Spot
- Narrow Beam
- Wide Beam
- Convergent Reflective Type
- Retroreflective Type
- Chemical / Oil-resistant
- Heat-resistant
- Vacuum-resistant
- Liquid Leak / Liquid Detection
- Fiber Options
- Semi-custom fibers
- Fiber Dimensions
- Thru-beam Type
- Retroreflective Type
- Reflective Type
- Others
- Amplifiers
- FX-500 series
- FX-100 series
- INDEX

DIMENSIONS (Unit: mm in) Refer to the **FX-500 series** (p.96), **FX-100 series** (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.


Reflective type fibers 

Dimensions are listed in the order of thru-beam type, retroreflective type, and reflective type, and in alphabetic order of the Model No.


FD-V50  Free-cut

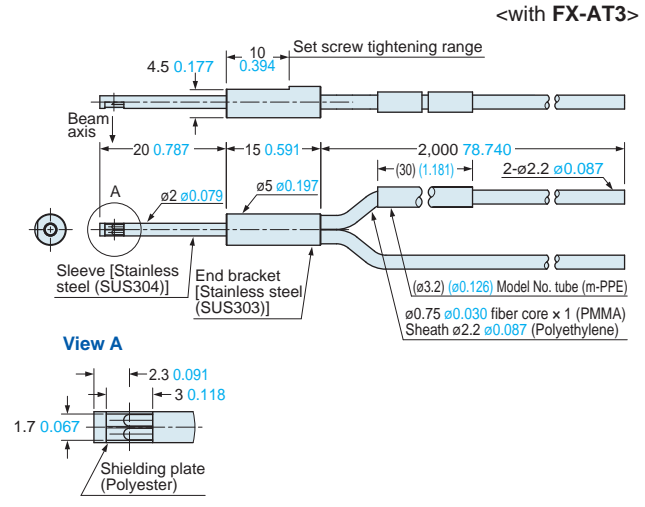


FD-Z20HBW  Free-cut

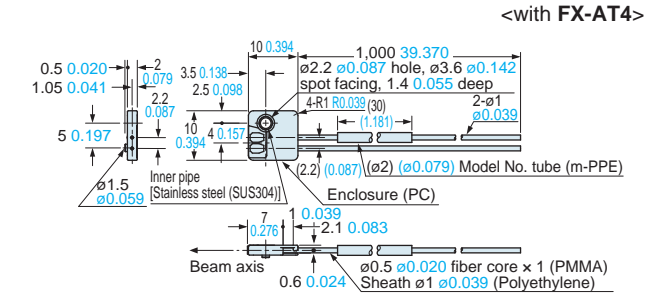


FD-Z20W  Free-cut

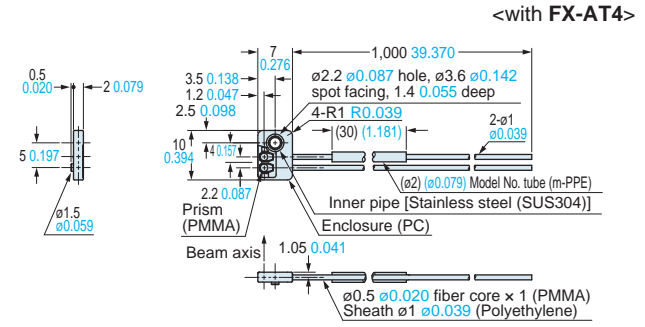


FD-Z40HBW  Free-cut

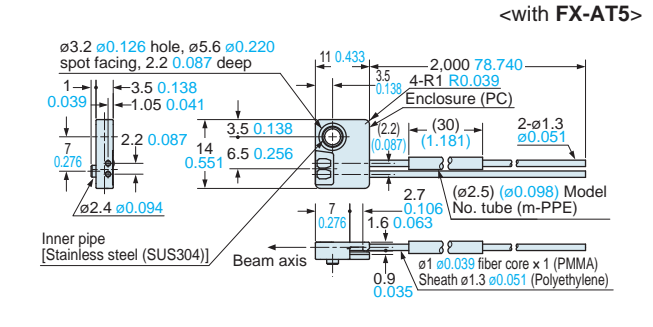


FD-Z40W  Free-cut

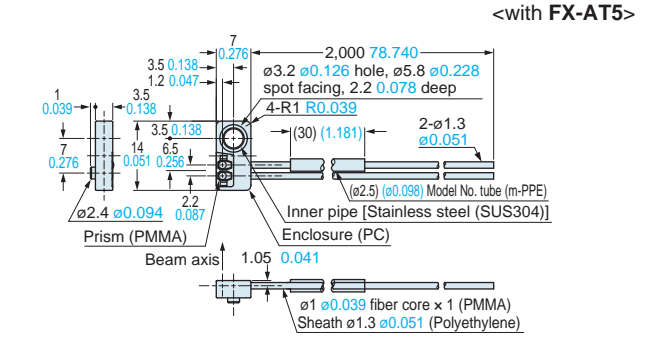

FD-Z50HW  Free-cut

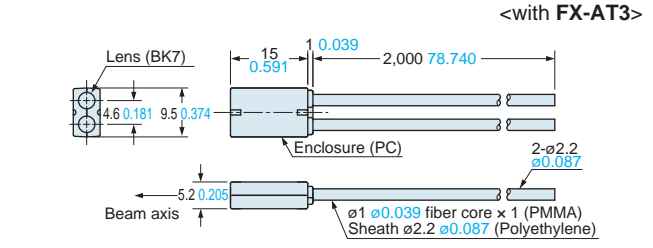

Assembly dimensions with MS-FD-2 (attached mounting bracket)

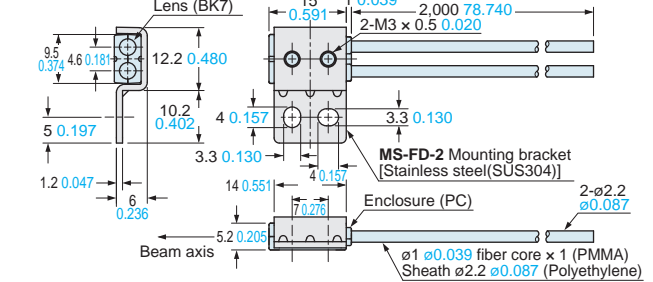

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type

Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series

INDEX

DIMENSIONS (Unit: mm in)

Refer to the **FX-500 series** (p.96), **FX-100 series** (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers


FX-500 series
FX-100 series

INDEX


Vacuum-resistant Atmospheric side fiber

FT-J8 Free-cut

(Accessory for vacuum-resistant fiber) <with FX-AT3>

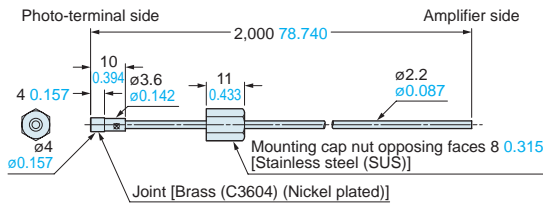


FB-1 Fiber bender (Optional)




Material: PP (Containing steel blade)

FV-BR1 Photo-terminal (for vacuum-resistant) (with vacuum-resistant fiber)

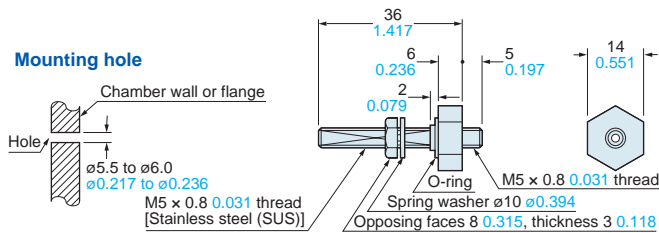


FV-LE1 Vacuum-resistant expansion lens (Optional)

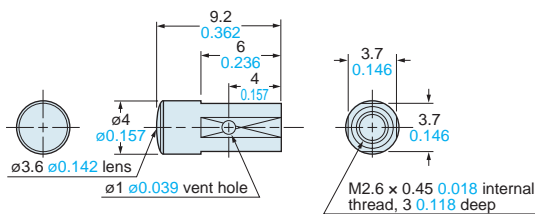


Material: Enclosure.....Aluminum alloy (A6061-T6)
Lens.....BK-7

FV-SV2 Vacuum-resistant side-view lens (Optional)

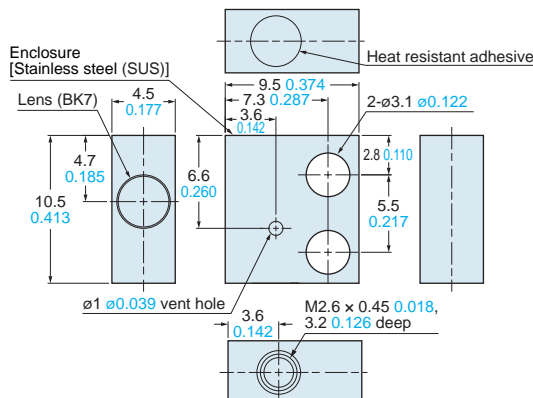


FTP-□ FDP-□ Protective tube (Optional)


FTP-□, FDP-N□

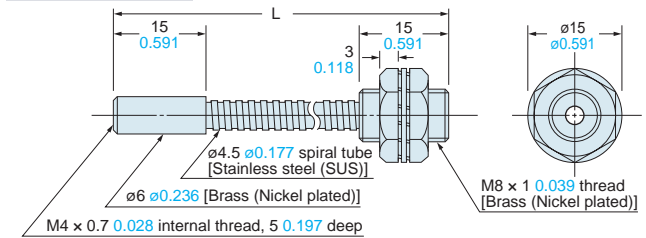

FTP-N□

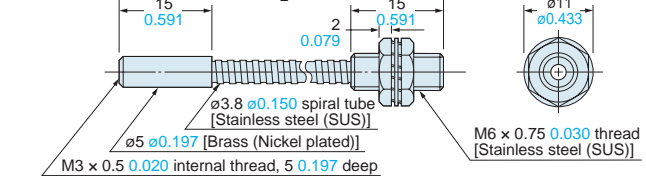

FDP-□

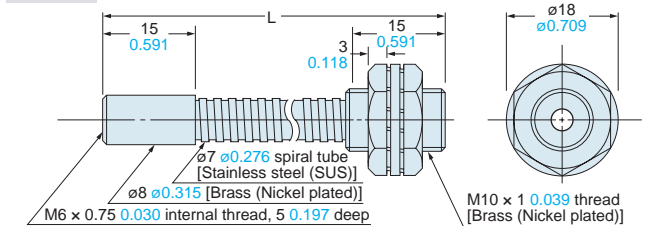


• Length L


| Model No. | Length L |
|--|---|
| FTP-500, FTP-N500, FDP-N500, FDP-500 | 500 ⁺¹⁰ ₀ 19.685 ^{+0.394} ₀ |
| FTP-1000, FTP-N1000, FDP-N1000, FDP-1000 | 1,000 ⁺¹⁰ ₀ 39.370 ^{+0.394} ₀ |
| FTP-1500, FTP-N1500, FDP-N1500, FDP-1500 | 1,500 ⁺¹⁰ ₀ 59.055 ^{+0.394} ₀ |

DIMENSIONS (Unit: mm in) Refer to the **FX-500 series (p.96)**, **FX-100 series (p.110)** for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.


FX-AT2 Attachment for fixed-length fiber (Accessory for fixed-length fiber)

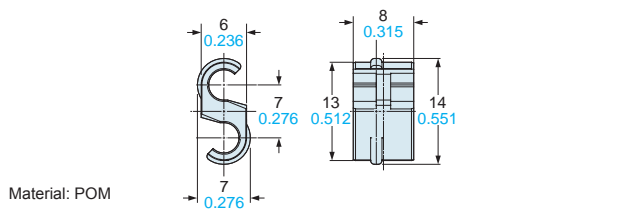


FX-AT3 Attachment for $\varnothing 2.2$ mm $\varnothing 0.087$ in fiber (Accessory for $\varnothing 2.2$ mm $\varnothing 0.087$ in fiber)

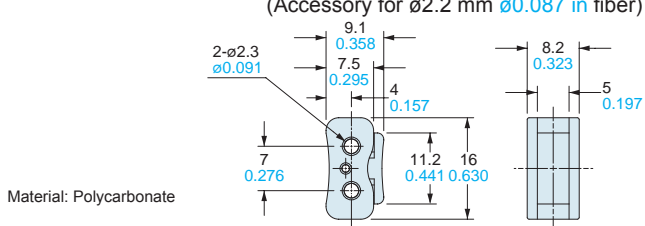


FX-AT4 Attachment for $\varnothing 1$ mm $\varnothing 0.039$ in fiber (Accessory for $\varnothing 1$ mm $\varnothing 0.039$ in fiber)

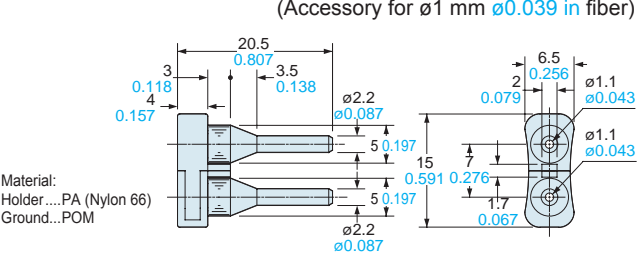


FX-AT5 Attachment for $\varnothing 1.3$ mm $\varnothing 0.051$ in fiber (Accessory for $\varnothing 1.3$ mm $\varnothing 0.051$ in fiber)

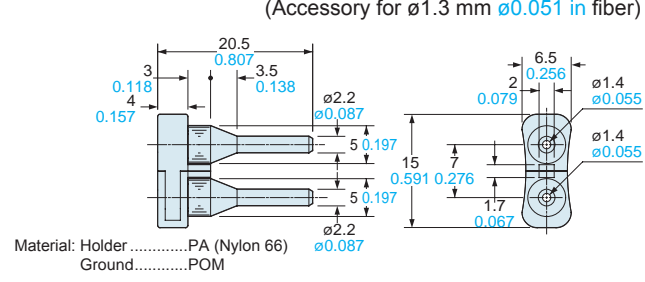


FX-AT6 Attachment for $\varnothing 1$ mm $\varnothing 0.039$ in / $\varnothing 1.3$ mm $\varnothing 0.051$ in mixed fiber (Accessory for $\varnothing 1$ mm $\varnothing 0.039$ in / $\varnothing 1.3$ mm $\varnothing 0.051$ in mixed fiber)

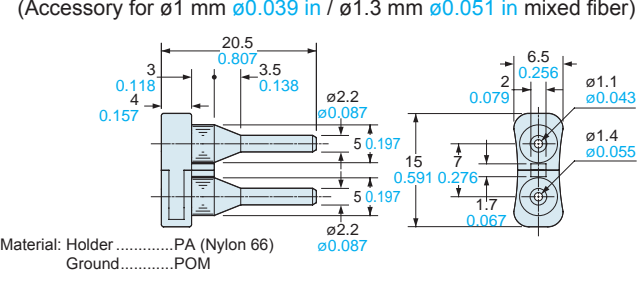


FX-CT2 Fiber cutter (Accessory for free-cut type fiber)

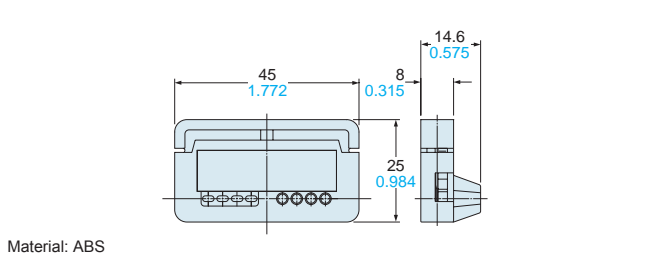


FX-LE1 Expansion lens (Optional)

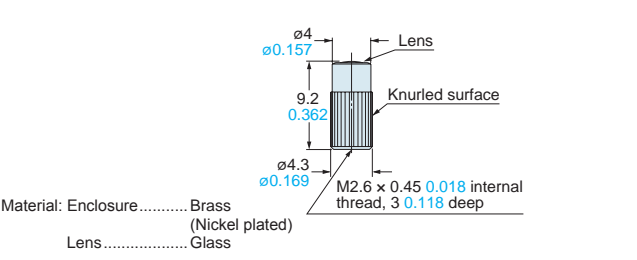


FX-LE2 Super-expansion lens (Optional)

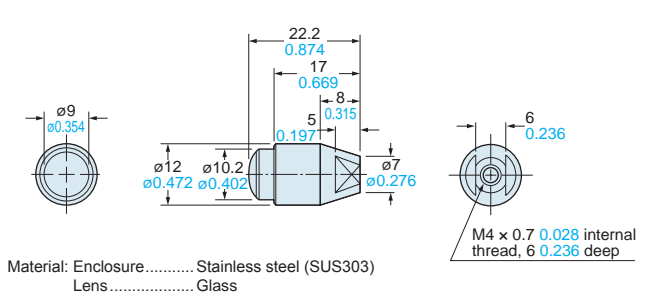

FX-MR1 Pinpoint spot lens (Optional)

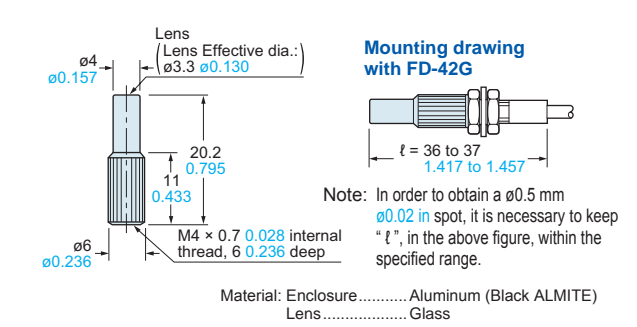

FX-MR2 Zoom lens (Optional)

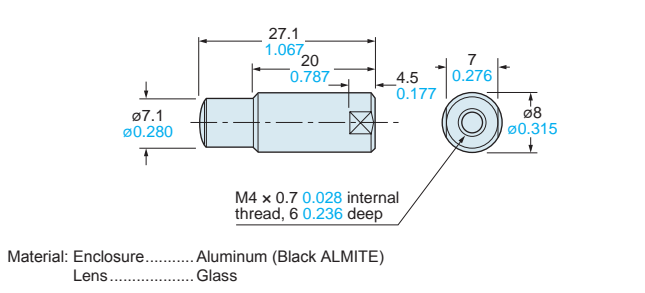

New product introduction
Tough Fiber
Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series


INDEX

DIMENSIONS (Unit: mm in)

Refer to the **FX-500 series** (p.96), **FX-100 series** (p.110) for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.


FX-MR3 Finest spot lens (Optional)

Mounting drawing with FD-EG30

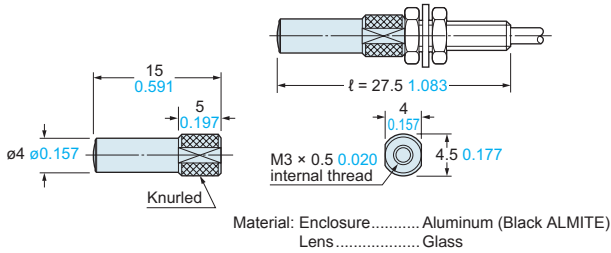

Note: When inserting the fiber, insert fully till it stops.


FX-MR5 Zoom lens (Optional)

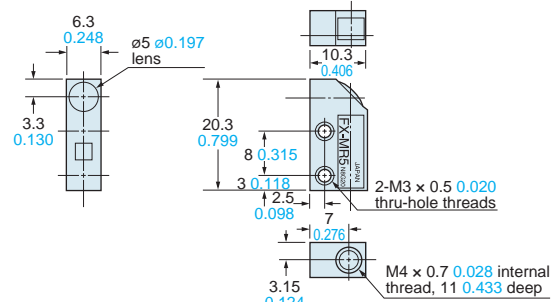

NT-FX-MR5 (exclusive nut) is attached.


FX-MR6 Finest spot lens (Optional)

Mounting drawing with FD-EG31

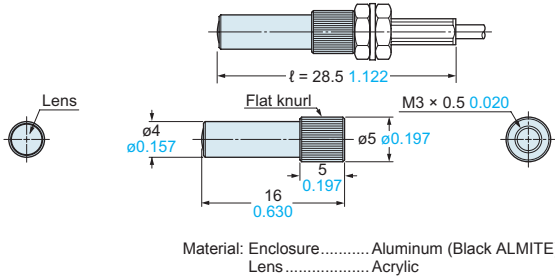


Note: When inserting the fiber, insert fully till it stops.


FX-MR7 Finest spot lens (Optional)

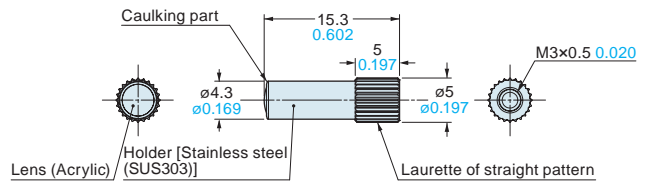


Mounting drawing with FD-R31G/R32EG/R33EG/R34EG




FX-MR8 Zoom lens (Optional)

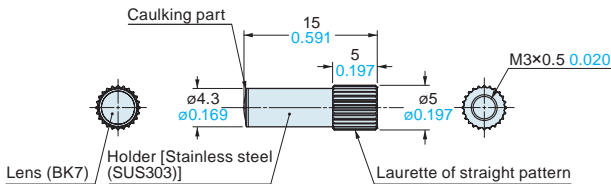


FX-MR9 Parallel light lens (Optional)

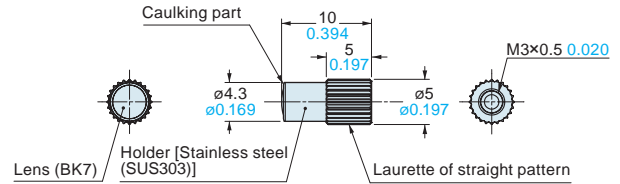

Mounting drawing with FD-R31G/R32EG/R33EG/R34EG




Mounting drawing with FD-R31G/R32EG/R33EG/R34EG




DIMENSIONS (Unit: mm in) Refer to the **FX-500 series (p.96)**, **FX-100 series (p.110)** for dimensions of the amplifiers. The CAD data in the dimensions can be downloaded from our website.

FX-SV1 Side-view lens (Optional)



Material: Enclosure..... Brass (Nickel plated)
Lens..... Glass


MS-EX3 Mounting bracket for FX-MR2 (Accessory for FX-MR2)

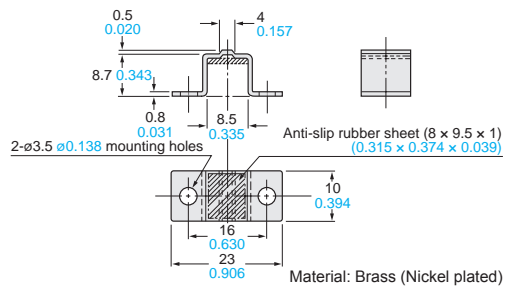

Material: Brass (Nickel plated)

MS-FD-2 Fiber mounting bracket


Accessory for FD-Z50HW, FR-KZ50E/KZ50H/Z50HW, FD-H30-KZ1V-S

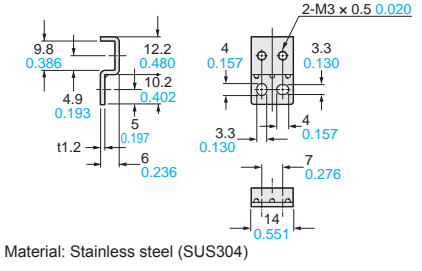

Material: Stainless steel (SUS304)

MS-FD-3 Fiber mounting bracket


Accessory for FT-KV40/FT-KV40W

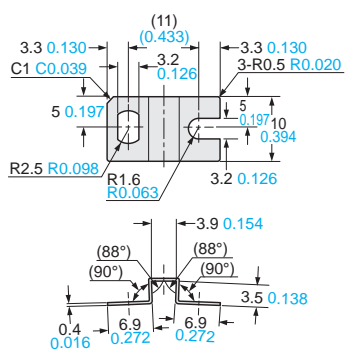

Material: Stainless steel (SUS304)

RF-003 Reflector for FR-KZ50E/KZ50H

Accessory for FR-KZ50E/KZ50H

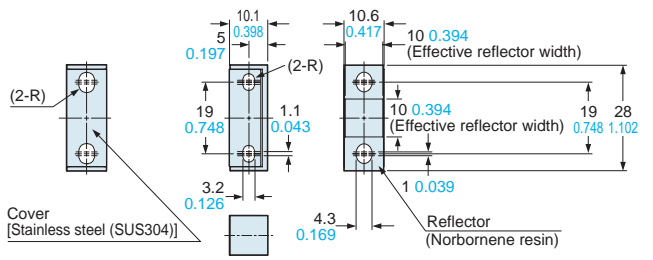


Cover [Stainless steel (SUS304)]

Reflector (Norbornene resin)


RF-13 Reflective tape for FR-Z50HW

Accessory for FR-Z50HW

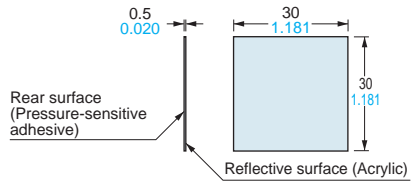

Material : Acrylic (Reflective surface)


RF-210 Reflector (Optional)

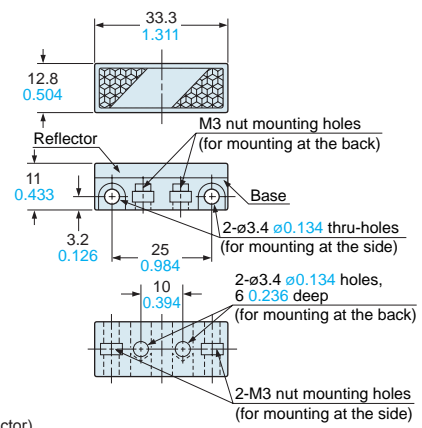

Material: Acrylic (Reflector)
ABS (Base)


Two M3 (length 8 mm 0.315 in) screws with washers and two nuts are attached.

RF-220 Reflector (Optional)

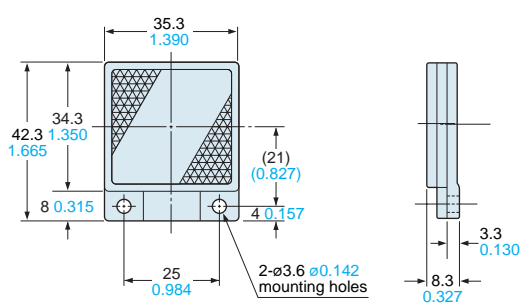

Material: Acrylic (Reflector)
ABS (Base)

RF-230 Reflector (Optional)

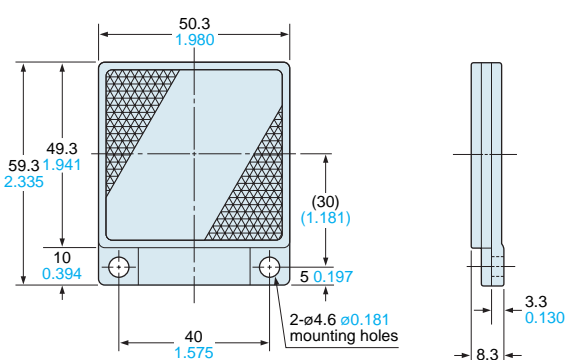

Material: Acrylic (Reflector)
ABS (Base)

New product introduction
Tough Fiber
Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series

INDEX

Digital Fiber Sensor

FX-500 SERIES Ver.2

New product introduction
Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others




Amplifiers

FX-500 series

FX-100 series

INDEX


At the industry's leading edge

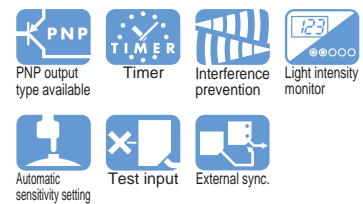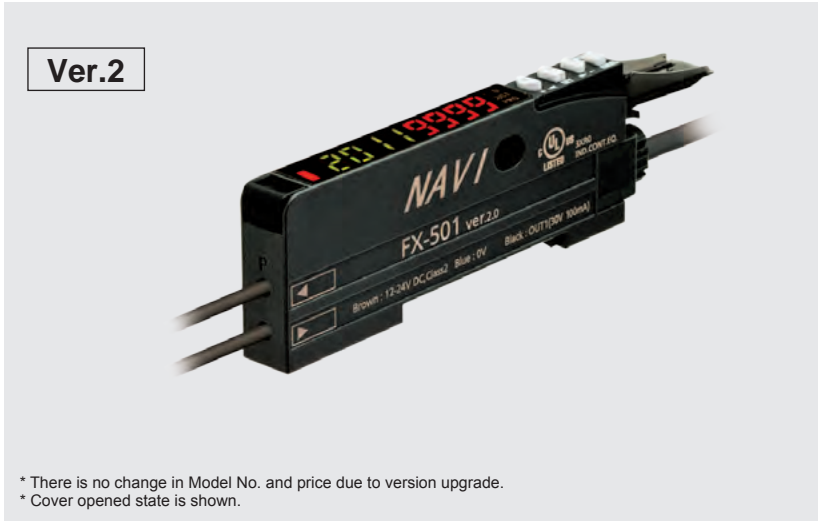

* There is no change in Model No. and price due to version upgrade.
* Cover opened state is shown.


Improved the operability and visibility of the operation keys

Operation keys (setting switch and MODE key) have been renewed to be easy to operate. Also, the color of the keys has been changed from black to light gray to achieve good visibility in dim light.

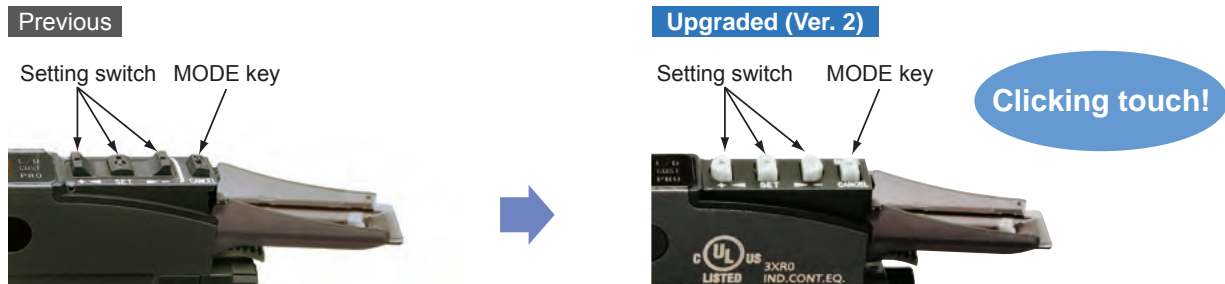

High stability!

When the **FX-500** series is used together with our super quality fiber, the incident light intensity variation among units is decreased to only 1/4 of that of conventional models. By being close to absolute values instead of modified digital values, changes in detection that could not be found in the past can now be monitored.

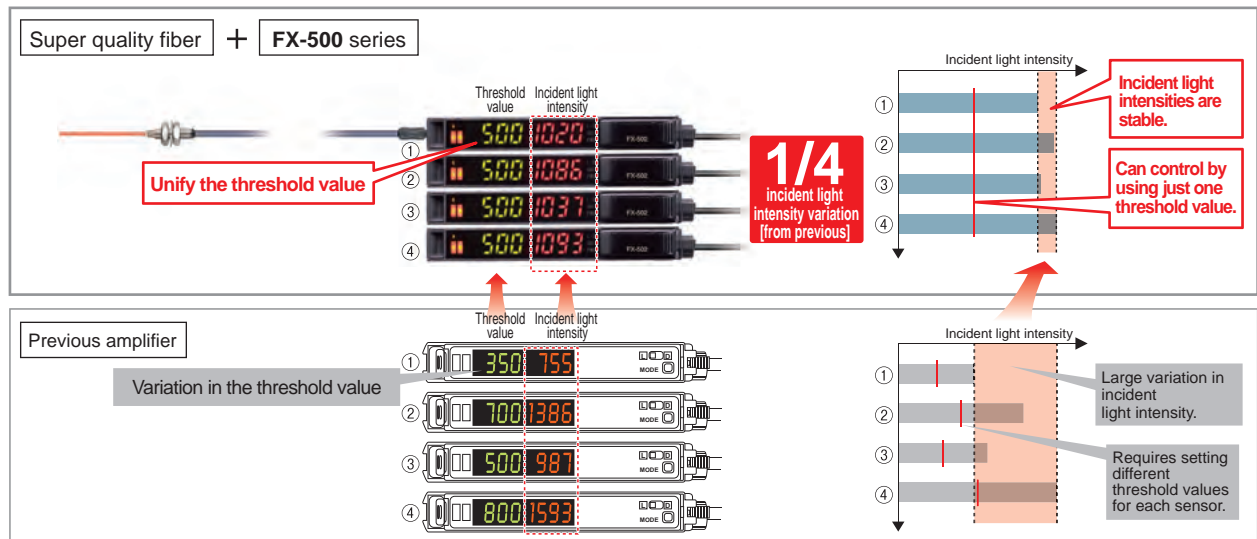

A quality that surpassed that of standard fibers!

New fibers developed using a new manufacturing method adopted by our own factory along with a persistent quality control system.
The basic performance of a standard fiber is greatly enhanced!

Stable emission amount ± 10

Variation in emission amount of the fiber core is controlled down to less than $\pm 10\%$, achieving a stable detection.

- Beam axis deviation: Thru-beam type within $\pm 2^\circ$, Reflective type within $\pm 3^\circ$
- Beam axis centering precision: within $\pm 150\ \mu\text{m}$

$\phi 2.2\ \text{mm}$ $\phi 0.087\ \text{in}$ standard fiber

New material
Single core standard fiber with high flexibility

Previous
In general, high-flexibility types adopt a multi-fiber core, which may result in large variation in light emission.

Expanded temperature range

Ambient temperature [-40 to +70 °C -40 to +158 °F in previous model]

-55 to +80 °C
-67 to +176 °F

1.2 times more than previous model

More flexible! **R4**

Bending radius [Previous model is R25 mm R0.984 in]

R4 mm
R0.157 in

1/6 of that of previous model

Integrated high-precision plug

The centering precision of the fiber core attached to the inserting plug is doubled. As the insertion precision is increased, the variation among units can be greatly suppressed.

- Centering precision: within $\pm 40\ \mu\text{m}$

More bendable!

Bending durability [Previous model is 1,000 times]


10 million times

10,000 times more than previous model

* Bending conditions
Bending radius: R10 mm R 0.394 in,
Reciprocating bending 180°

Max. 25 μs response time

FX-500 with its high response time contributes to improve productivity.

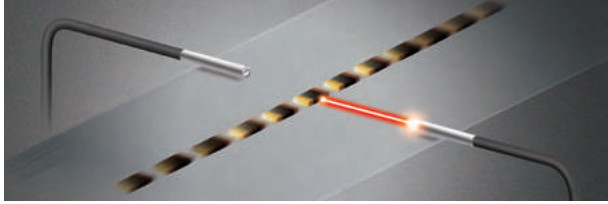

Performing minute object detection when using a small diameter fiber is now possible with a high response time and longer sensing range.

Hyper HYPR mode incorporated

FX-500 in combination with small diameter fibers which can handle challenging detections, allows long sensing range.



Max. 5.7 times! (Note)
longer than the previous model

Note: When using FD-NFM2.

So accurate! Sharp detection with suppressed hysteresis

FX-500 with its accurate detection catches fractional differences in light intensity, achieving high precision and solving low-hysteresis applications.

- Long range detection of small objects with small difference in light intensity **H-02 mode**
- Highly accurate detection while avoiding saturation **H-01 mode**

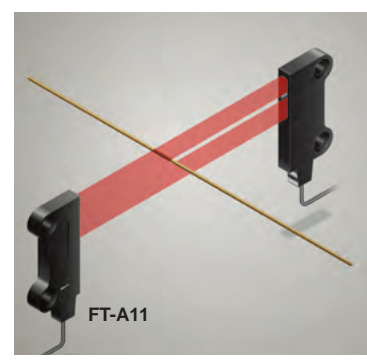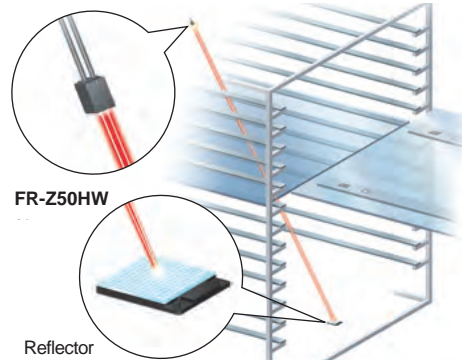

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers


Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series

INDEX

Flat display with wide viewing angle


The large and high-contrast 7-segment display of high luminance provides clear visibility from a wide angle of view.

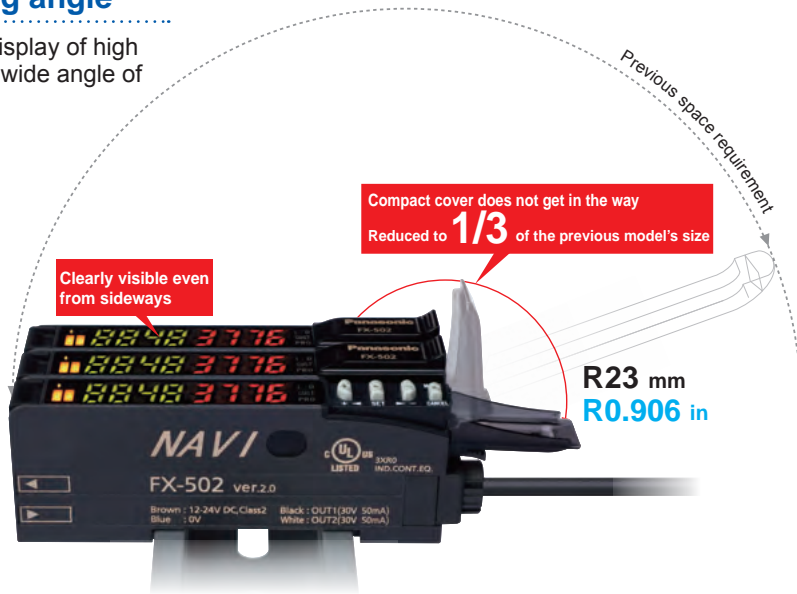

Resolves variation in displayed incident light intensity

Display adjustment setting

The variation in display can be adjusted to random values. This helps to define proper instruction in a work order.

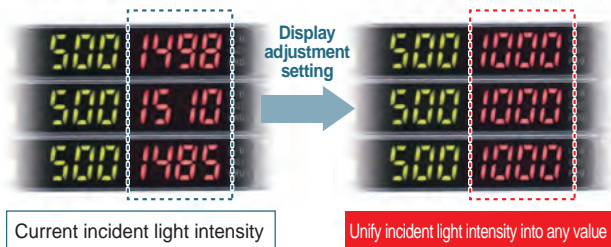

Stable detection over long and short periods

Stabilized emission amount

The “four-chemical emitting element”, which we are the first to incorporate to maintain a stable level of light emission, has now become an industry standard. **FX-500** series continues to adopt the same emitting element as well as the “APC (Auto Power Control) circuit” which improves stability in short periods such as when the power is turned on.

Saves maintenance time

Threshold tracking function

This function performs automatic setting to threshold value by checking the incident light intensity at desired intervals in order to follow the changes in the light amount resulting from changes in the environment over long periods (such as dust). This contributes to reduction in maintenance hours.

Suitable for preventative maintenance

Self-diagnosis output

FX-502(P)
FX-505(P)-C2

FX-502(P) / 505(P)-C2 can set Output 2 as a self-diagnosis output. When the teaching of Output 1's threshold value is carried out, Output 2 is set concurrently with the setting randomly shifted by the amount of surplus of threshold value. Light intensity deterioration due to fiber breakage or dust accumulation can be notified as an alarm output.

- Detect deterioration in light intensity (e.g. Useful in dusty environment)



Self-diagnosis can be used with the threshold tracking function for added effectiveness.


Stable detection while being eco-friendly

Emission power & gain setting

In cases when the incident light intensity is saturated, the light emitting amount can be adjusted to the optimal level by AUTO without changing the response time. This allows stable detection with an optimal S/N ratio and saves energy by controlling the emitting electric current.


Object present

Object absent

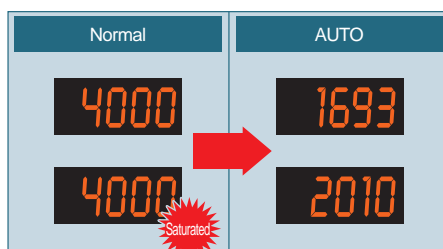

Auto mode (AUTO) and 3-level manual mode (H / M / L [fine-adjustable]) are incorporated.


- Detecting a transparent sheet




Built-in logic functions No PLC necessary, saving material and programming costs

Logical calculation functions


3 logical calculations (AND, OR, XOR) are available with fiber sensor only. 3 logical operations can be selected against Output 1. Additional controller is not required so both wire-saving and cost reduction can be achieved.




Calculation of two neighboring amplifiers



Calculation of two outputs in one amplifier FX-502(P) / 505(P)-C2




Calculation of one amplifier and external input FX-502(P) / 505(P)-C2



Equipped with 5 timer types


A wide variety of timer control operations can be carried out by fiber sensors only.

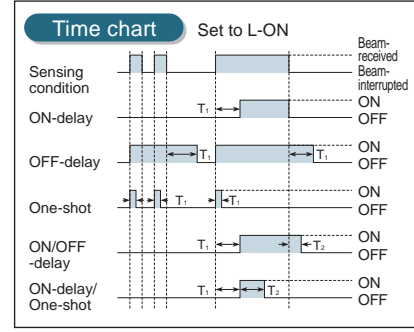

Timer period: 0.05 ms to 32 s
Output 1 has ON / OFF-delay and ON-delay / One-shot timers are available.

Analog output cable type FX-505(P)-C2

To monitor the sensing of objects, a 4 to 20 mA analog current is output in respond to the digital value of the incident light intensity.



The drifting path can be monitored as the light intensity changes.

Smooth setup changes by 8 data banks

The number of data banks used for saving the setup conditions of the amplifier is increased to eight. Setup conditions can be saved and loaded to make setup changes easy at a worksite where multiple models are manufactured.

Remote control improves work efficiency by external input FX-502(P) / FX-505(P)-C2

Work efficiency can be improved by operating via PLC output or other external signal. (FX-502(P) can operate via external signal when switching from Output 2 to external input.)

Functions operable by external input

| | |
|--------------------------------------|--|
| Full-auto / Limit / 2-point teaching | Display adjustment setting |
| Data bank load / save | Logical calculation (self-unit only) |
| Emission halt | Copying function lock (self-unit only) |


An optical communication function allows sensors to be adjusted simultaneously

The data that is currently set can be copied and saved all at once for all amplifiers connected together from the right side thanks to the optical communication function. This greatly reduces troublesome setup tasks and makes setup much smoother.



No need to specify a main unit or sub unit

All FX-500 amplifiers can be used as either a main unit or a sub unit. Just use a main cable or a sub cable to distinguish the two. This reduces the costs of inventory management.

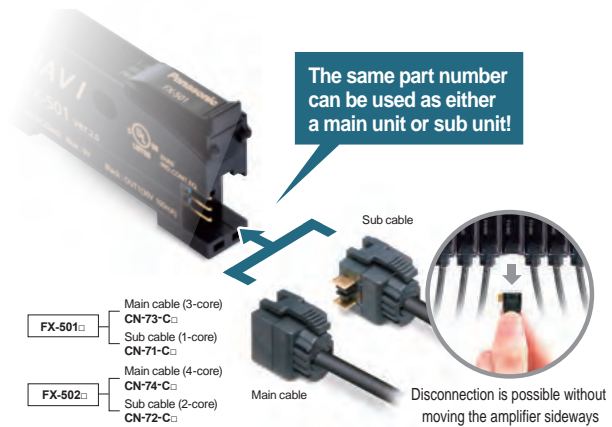

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options
Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series

INDEX

ORDER GUIDE

New product introduction
Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers



FX-500 series

FX-100 series

INDEX

Amplifiers

Quick-connection cable is not supplied with **FX-501(P)** and **FX-502(P)**. Please order it separately.

| Type | Appearance | Model No. | Emitting element | Output | External input |
|---------------|---|-------------------|--|---|---|
| Standard type |  | FX-501 | Red LED | NPN open-collector transistor | — |
| | | FX-501P | | PNP open-collector transistor | |
| 2-output type | | FX-502 | | NPN open-collector transistor 2 outputs | Incorporated (Switchable with Output 2) |
| | | FX-502P | | PNP open-collector transistor 2 outputs | |
| Cable type |  | FX-505-C2 | NPN open-collector transistor 2 outputs, analog output | Incorporated | |
| | | FX-505P-C2 | PNP open-collector transistor 2 outputs, analog output | | |


Quick-connection cables

For FX-501(P) Quick-connection cable is not supplied with the amplifier. Please order it separately.

| Type | Model No. | Description | |
|---------------------|-----------------|------------------------------|--|
| Main cable (3-core) | CN-73-C1 | Length: 1 m 3.281 ft | 0.2 mm ² 3-core cabtyre cable, with connector on one end Cable outer diameter: ø3.3 mm ø 0.130 in |
| | CN-73-C2 | Length: 2 m 6.562 ft | |
| | CN-73-C5 | Length: 5 m 16.404 ft | |
| Sub cable (1-core) | CN-71-C1 | Length: 1 m 3.281 ft | 0.2 mm ² 1-core cabtyre cable, with connector on one end Cable outer diameter: ø3.3 mm ø 0.130 in Connectable to a main cable up to 15 cables. |
| | CN-71-C2 | Length: 2 m 6.562 ft | |
| | CN-71-C5 | Length: 5 m 16.404 ft | |


Main cable

- **CN-73-C□**



Sub cable

- **CN-71-C□**




For FX-502(P) Quick-connection cable is not supplied with the amplifier. Please order it separately.

| Type | Model No. | Description | |
|---------------------|-----------------|------------------------------|--|
| Main cable (4-core) | CN-74-C1 | Length: 1 m 3.281 ft | 0.2 mm ² 4-core cabtyre cable, with connector on one end Cable outer diameter: ø3.3 mm ø 0.130 in |
| | CN-74-C2 | Length: 2 m 6.562 ft | |
| | CN-74-C5 | Length: 5 m 16.404 ft | |
| Sub cable (2-core) | CN-72-C1 | Length: 1 m 3.281 ft | 0.2 mm ² 2-core cabtyre cable, with connector on one end Cable outer diameter: ø3.3 mm ø 0.130 in Connectable to a main cable up to 15 cables. |
| | CN-72-C2 | Length: 2 m 6.562 ft | |
| | CN-72-C5 | Length: 5 m 16.404 ft | |


Main cable

- **CN-74-C□**




Sub cable

- **CN-72-C□**



End plates

End plates are not supplied with the amplifier. Please order them separately when the amplifiers are mounted in cascade.


| Appearance | Model No. | Description |
|---|-----------------|--|
|  | MS-DIN-E | When amplifiers are mounted in cascade, or when an amplifier moves depending on the way it is installed on a DIN rail, these end plates clamp amplifiers into place on both sides. Make sure to use end plates when cascading multiple amplifiers together. Two pcs. per set |

OPTIONS

| Designation | Model No. | Description |
|----------------------------|-----------------|--------------------------------|
| Amplifier mounting bracket | MS-DIN-2 | Mounting bracket for amplifier |


Amplifier mounting bracket

- MS-DIN-2



Accessory

- **FX-MB1** (Amplifier protection seal)
10 sets of 2 communication window seals and 1 connector seal



New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers

Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series

INDEX

SPECIFICATIONS

| Item | Model No. | Type | Standard type | 2-output type | Cable type (Analog output type) |
|---|----------------------------------|------------|---|---|---|
| | | NPN output | FX-501 | FX-502 | FX-505-C2 |
| | | PNP output | FX-501P | FX-502P | FX-505P-C2 |
| Supply voltage | | | 12 to 24 V DC ⁺¹⁰ / ₋₁₅ % Ripple P-P 10 % or less | | |
| Power consumption | | | Normal operation: 960 mW or less (current consumption 40 mA or less at 24 V supply voltage, excluding analog output of cable type) ECO mode: 680 mW or less (current consumption 28 mA or less at 24 V supply voltage, excluding analog output of cable type) | | |
| Output (2-output type and cable type: Output 1, Output 2) | | | <NPN output type> NPN open-collector transistor • Maximum sink current: 100 mA (2-output type and cable type are 50 mA) (Note 2) • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 2 V or less (Note 3) (at maximum sink current) | <PNP output type> PNP open-collector transistor • Maximum source current: 100 mA (2-output type and cable type are 50 mA) (Note 2) • Applied voltage: 30 V DC or less (between output and +V) • Residual voltage: 2 V or less (Note 3) (at maximum source current) | |
| | Output points | | 1 point | 2 points | |
| | Output operation | | Switchable either Light-ON or Dark-ON by L/D mode | | |
| | Short-circuit protection | | Incorporated | | |
| Response time | | | H-SP: 25 μs or less, FAST: 60 μs or less, STD: 250 μs or less, LONG: 2 ms or less, U-LG: 4 ms or less, HYPR: 24 ms or less, selectable | | |
| Analog output (Cable type only) | | | Output current: 4 to 20 mA approx. [H-SP, FAST, STD: At 0 to 4,000 digits, LONG: At 0 to 8,000 digits (Note 4)], Response time: 2 ms or less, Zero point: Within 4 mA ±1 % F.S., Span: Within 16 mA ±5 % F.S., Linearity: Within ±3 % F.S., Load resistance: 0 to 250 Ω | | |
| External input (2-output type only, switchable with Output 2) | | | <NPN output type> NPN non-contact input • Signal condition High: +8 V to +V DC or Open Low: 0 to +1.2 V DC (at 0.5 mA source current) • Input impedance: 10 kΩ approx. | <PNP output type> PNP non-contact input • Signal condition High: +4 V to +V DC (at 3 mA sink current) Low: 0 to +0.6 V DC or Open • Input impedance: 10 kΩ approx. | |
| | Possible external input function | | Emission halt / Teaching (Full-auto, Limit, 2-point) / Logic operation setting / Copy lock / Display adjustment / Data bank load / Data bank save, selectable | | |
| Sensitivity setting | | | 2-point teaching / Limit teaching / Full-auto teaching / Manual adjustment | | |
| Incident light intensity display range | | | H-SP / FAST / STD: 0 to 4,000, LONG: 0 to 8,000, U-LG / HYPR: 0 to 9,999 | | |
| Timer function | | | <Output 1> Incorporated with variable OFF-delay / ON-delay / One-shot / ON OFF-delay / ON-delay • One-shot timer, switchable either effective or ineffective | | |
| | Timer period | | <Output 2> Incorporated with variable OFF-delay / ON-delay / One-shot timer, switchable either effective or ineffective | | |
| Light emitting amount selection function | | | Incorporated, 3 levels (each level 25 to 100 %) + Auto setting [1 level (25 to 100 %) when using H-SP mode] | | |
| Interference prevention function | | | Incorporated (Note 5), selectable either automatic interference prevention or different frequency | | |
| Various settings | | | Hysteresis setting / Shift amount setting / Emission power setting / Display turning setting / ECO setting / Data bank loading saving setting / Copying setting / Code setting / Reset setting / Logical calculation setting / Threshold tracking setting, etc. | | |
| Protection | | | IP40 (IEC) | | |
| Ambient temperature | | | -10 to +55 °C +14 to +131 °F [If 4 to 7 units are mounted in cascade: -10 to +50 °C +14 to +122 °F or if 8 to 16 units (cable type: 8 to 12 units) are mounted in cascade: -10 to +45 °C +14 to +113 °F] (No dew condensation or icing allowed), Storage: -20 to +70 °C -4 to +158 °F | | |
| Emitting element (modulated) | | | Red LED (Peak emission wavelength: 643 nm 0.025 mil) | | |
| Material | | | Enclosure, Case cover: Polycarbonate, Switch: TPEE | | |
| Cable | | | | | 0.2 mm ² 6-core cabtyre cable, 2 m 6.562 ft long |
| Cable extension | | | | | Extension up to total 100 m 328.084 ft is possible with 0.3 mm ² , or more, cable. (however, supply voltage 12 V DC) |
| Weight | | | Net weight: 15 g approx., Gross weight: 70 g approx. | | Net weight: 60 g approx., Gross weight: 100 g approx. |
| Accessory | | | FX-MB1 (Amplifier protection seal): 1 set | | |

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C +73.4 °F.

2) 50 mA max. if 5 or more standard types are connected together. (25 mA in case of 2-output type and cable type)

3) In case of using the quick-connection cable (cable length 5 m 16.404 ft) (optional).

4) If display adjustment was conducted, it is not in this range.


5) Number of sensor heads which is possible to be mounted closely in auto interference prevention function depends on response time as shown in table below. Number of sensor heads which is possible to be mounted closely in different frequency Interference prevention function is up to 3 units.

• Number of sensor heads mountable closely (Unit: set)


| Response time | H-SP | FAST | STD | LONG | U-LG | HYPR |
|---------------|------|------|-----|------|------|------|
| IP-1 | 0 | 2 | 4 | 8 | 8 | 12 |

I/O CIRCUIT AND WIRING DIAGRAMS


FX-501 NPN output type

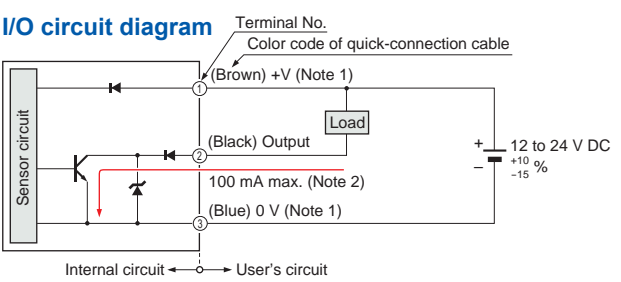


Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
 2) 50 mA max., if five amplifiers or more, are connected together.

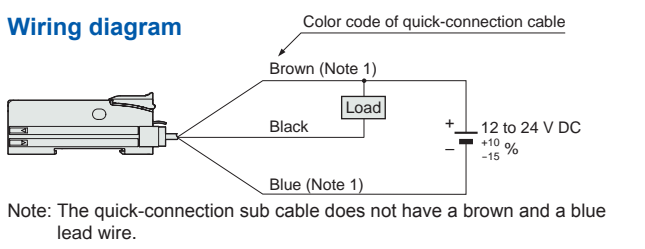


Note: The quick-connection sub cable does not have a brown and a blue lead wire.

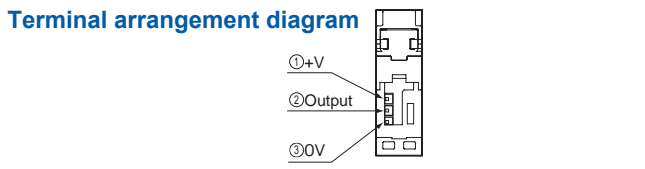


FX-501P PNP output type

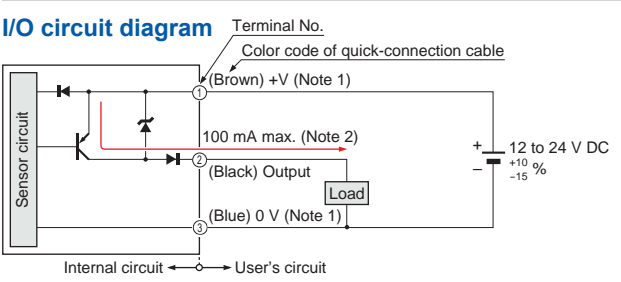


Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
 2) 50 mA max., if five amplifiers or more, are connected together.

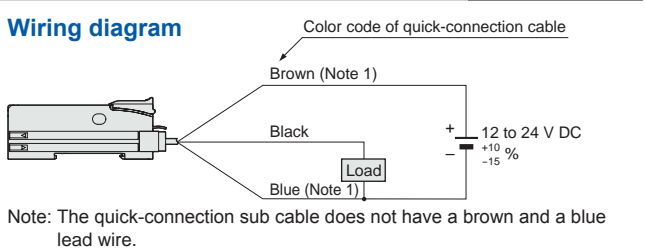


Note: The quick-connection sub cable does not have a brown and a blue lead wire.

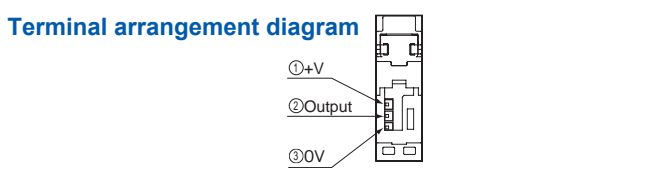


FX-502 NPN output type

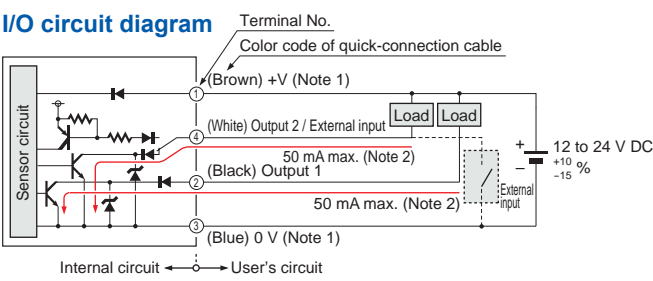


Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
 2) 25 mA max., if five amplifiers or more, are connected together.

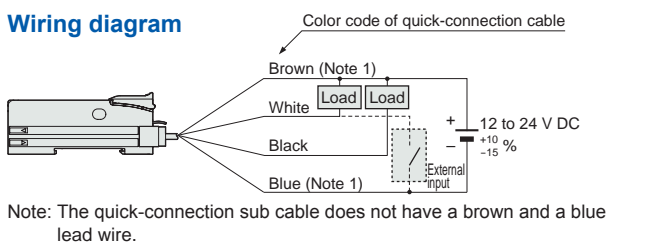


Note: The quick-connection sub cable does not have a brown and a blue lead wire.

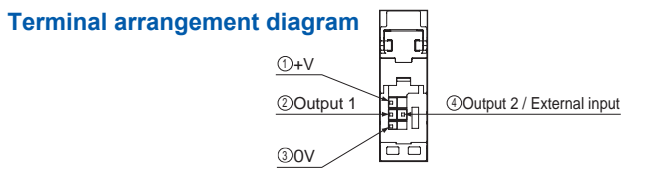


FX-502P PNP output type

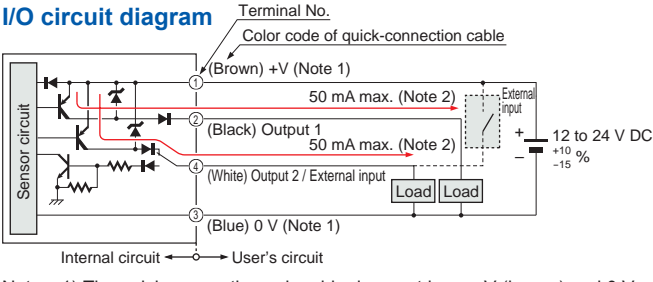

Notes: 1) The quick-connection sub cable does not have +V (brown) and 0 V (blue). The power is supplied from the connector of the main cable.
 2) 25 mA max., if five amplifiers or more, are connected together.

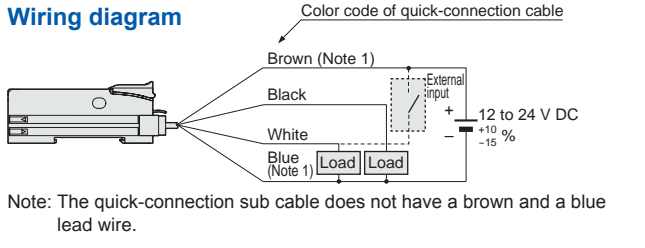

Note: The quick-connection sub cable does not have a brown and a blue lead wire.

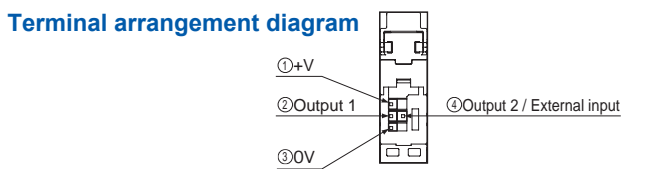

New product introduction
 Tough Fiber
 Fiber Selection Guide
 Model
 Choose by shape/application
 How to read Model No.
 Earlier models comparison table

Fibers
 Super Quality
 Threaded Type
 Square Head Type
 Cylindrical Type
 Sleeve
 Flat Type
 Small Spot
 Narrow Beam
 Wide Beam
 Convergent Reflective Type
 Retroreflective Type
 Chemical / Oil-resistant
 Heat-resistant
 Vacuum-resistant
 Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
 Thru-beam Type
 Retroreflective Type
 Reflective Type
 Others

Amplifiers
 FX-500 series
 FX-100 series

INDEX

I/O CIRCUIT AND WIRING DIAGRAMS

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others


Amplifiers
FX-500 series
FX-100 series

INDEX


FX-505-C2

NPN output type

I/O circuit diagram

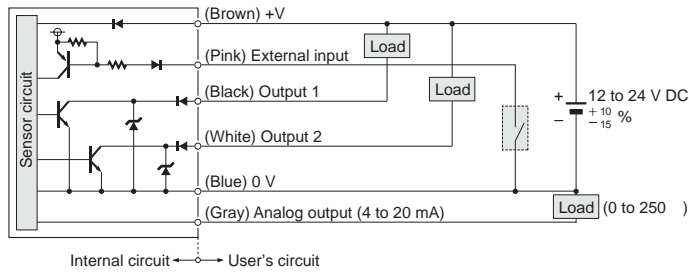


Wiring diagram

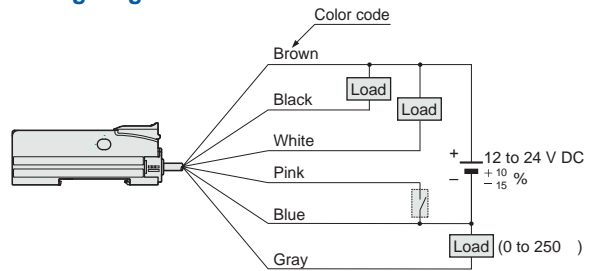


FX-505P-C2

PNP output type

I/O circuit diagram

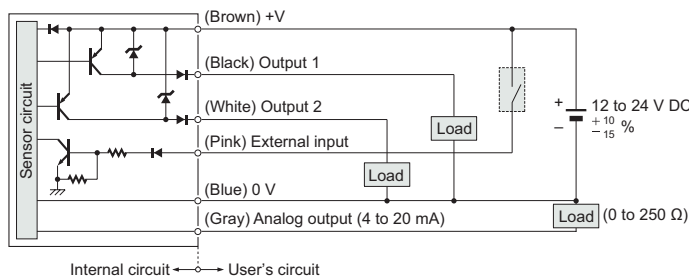





Wiring diagram

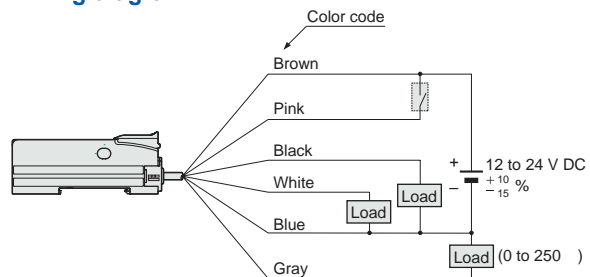





SENSING CHARACTERISTICS (TYPICAL)

Thru-beam type Parallel deviation Sensing characteristics are listed in the alphabetic order of the Model No.




FT-140 Thru-beam type **FT-30** Thru-beam type **FT-31** Thru-beam type **FT-31S** Thru-beam type

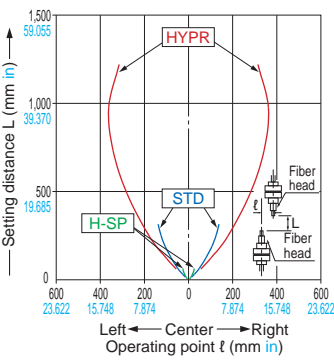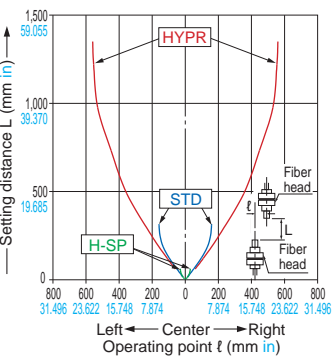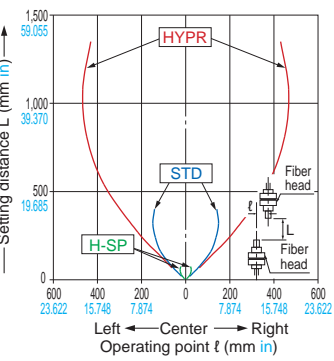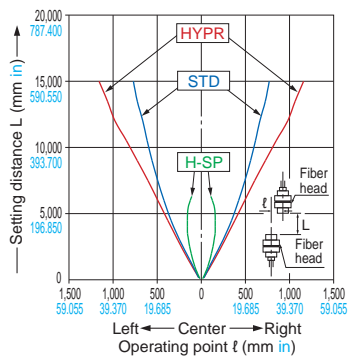





FT-31W Thru-beam type **FT-40** Thru-beam type **FT-42** Thru-beam type **FT-42S** Thru-beam type

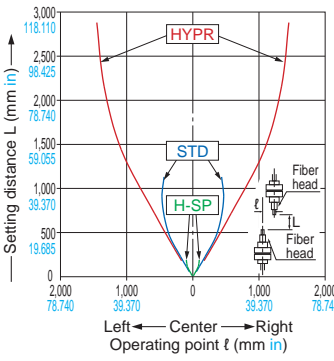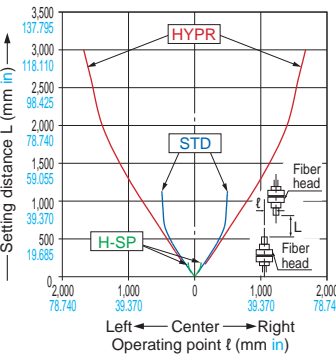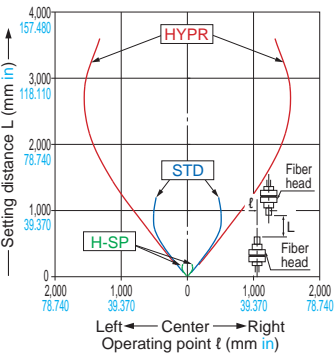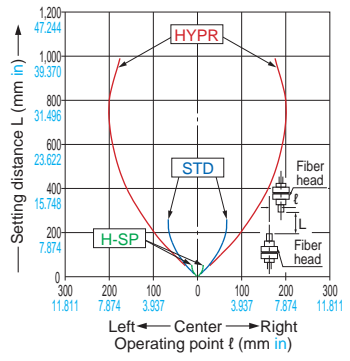

FT-42W Thru-beam type **FT-43** Thru-beam type **FT-45X** Thru-beam type

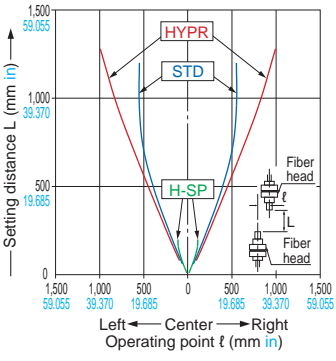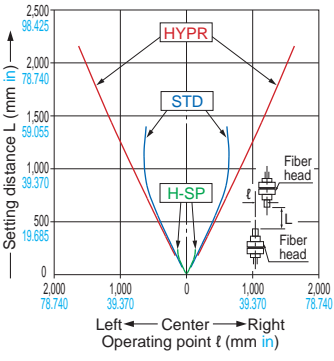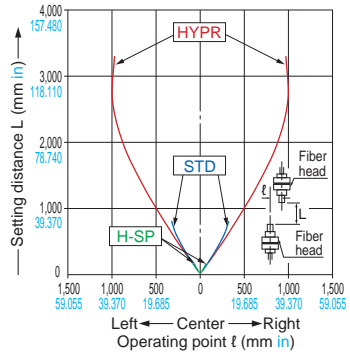

FT-A11 Thru-beam type **FT-A11W** Thru-beam type

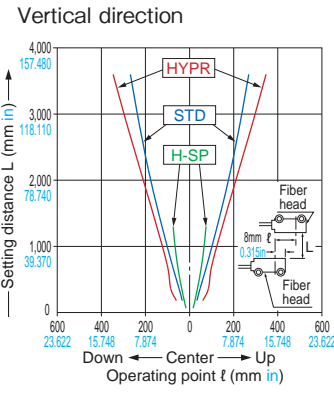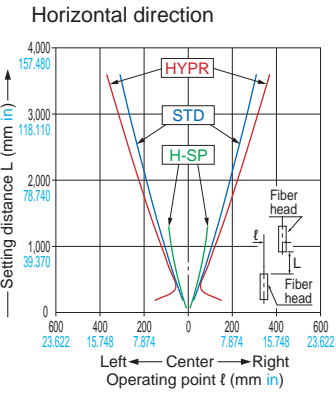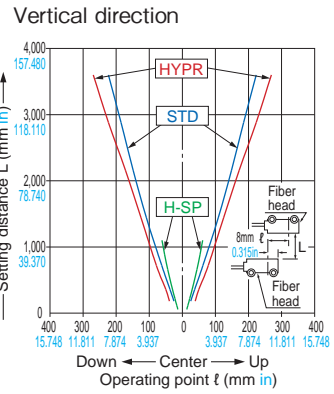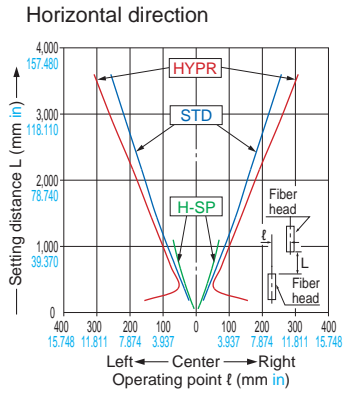

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options
Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series

INDEX


SENSING CHARACTERISTICS (TYPICAL)

Thru-beam type Parallel deviation Sensing characteristics are listed in the alphabetic order of the Model No. (Models with same sensing characteristics are grouped together.)


FT-A32

Thru-beam type

Horizontal direction

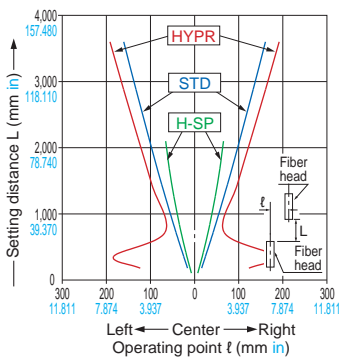


Vertical direction

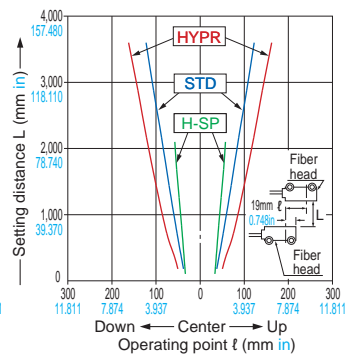


FT-A32W

Thru-beam type

Horizontal direction

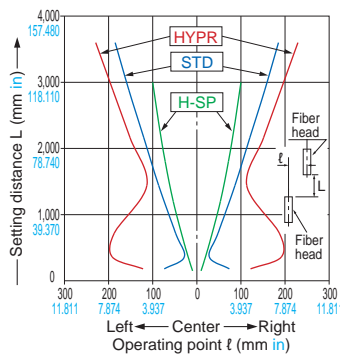


Vertical direction

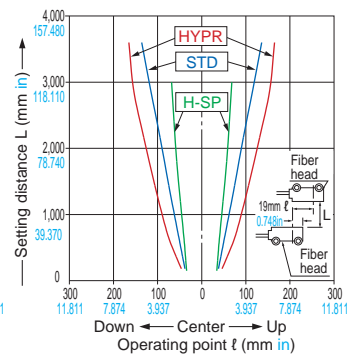


FT-AL05

Thru-beam type

Horizontal direction

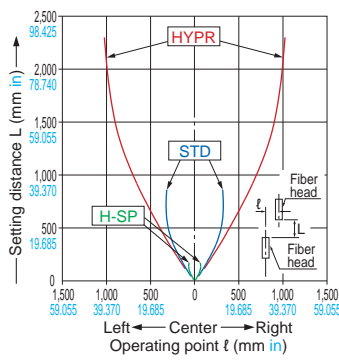


Vertical direction

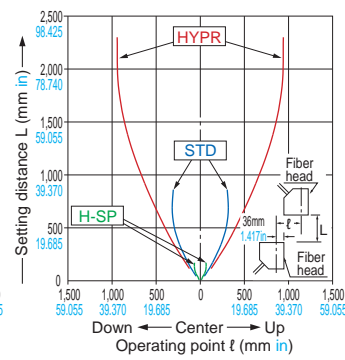


FT-E13

Thru-beam type

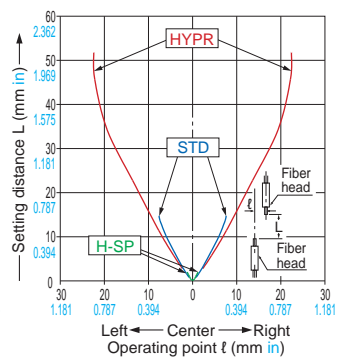


FT-E23

Thru-beam type

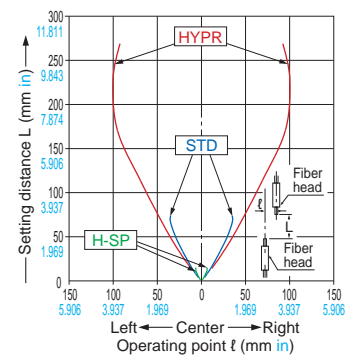


FT-H13-FM2

Thru-beam type

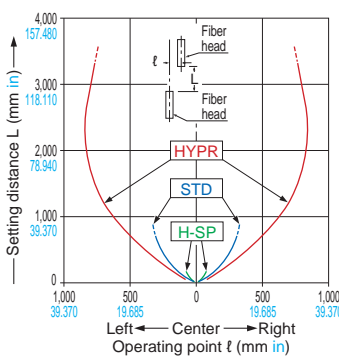


FT-H20-J20-S FT-H20-J30-S FT-H20-J50-S

Thru-beam type

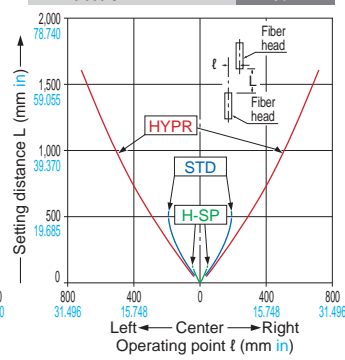

FT-H20-M1


Thru-beam type

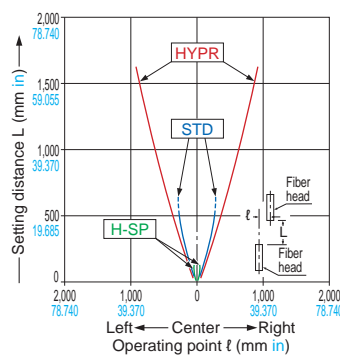


FT-H20-VJ50-S FT-H20-VJ80-S

Thru-beam type

Horizontal direction

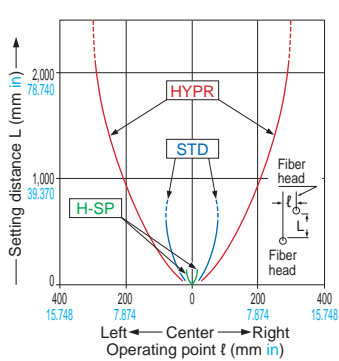


Vertical direction

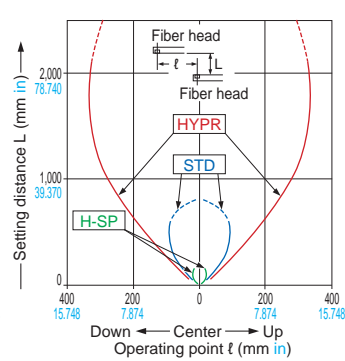


FT-H20W-M1

Thru-beam type

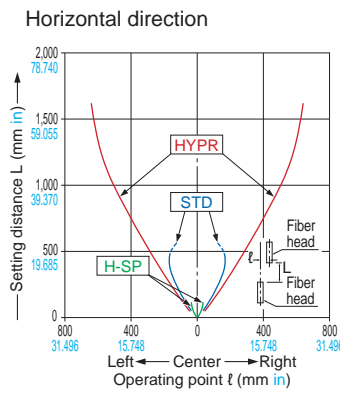

FT-H30-M1V-S


Thru-beam type

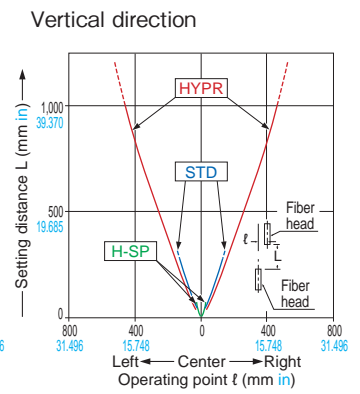


SENSING CHARACTERISTICS (TYPICAL)

Thru-beam type Parallel deviation Sensing characteristics are listed in the alphabetic order of the Model No. (Models with same sensing characteristics are grouped together.)


FT-H35-M2 Thru-beam type
FT-H35-M2S6

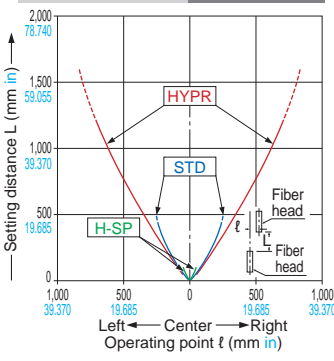



FT-HL80Y Thru-beam type

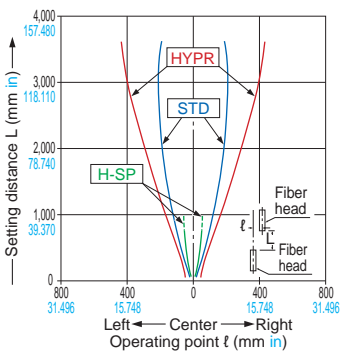



FT-KS40 Thru-beam type

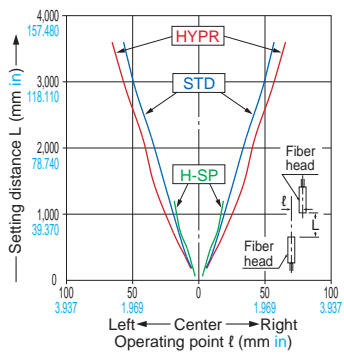



FT-KV26 Thru-beam type

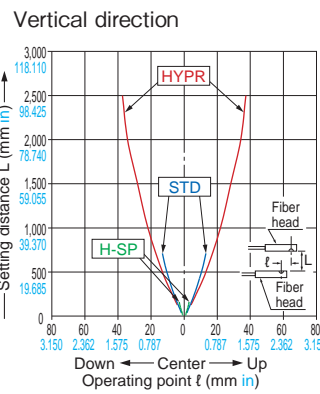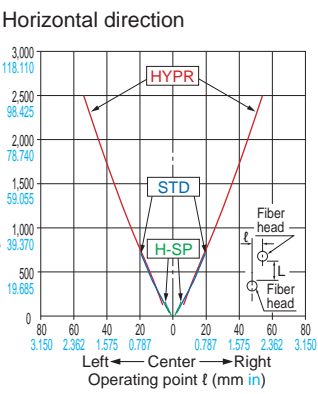


FT-KV40 Thru-beam type

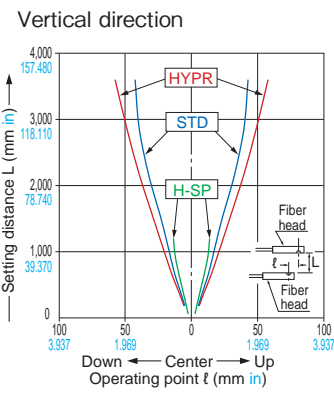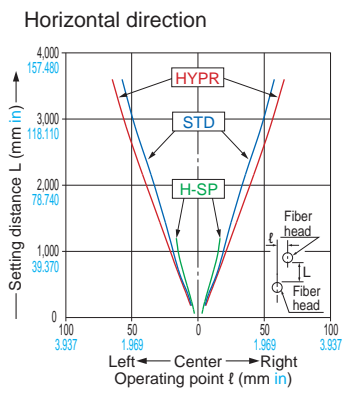


FT-KV40W Thru-beam type

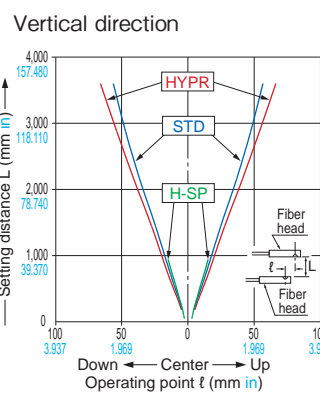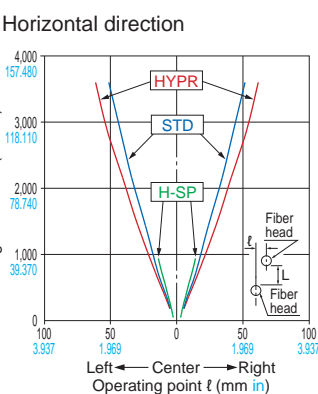



FT-L80Y Thru-beam type

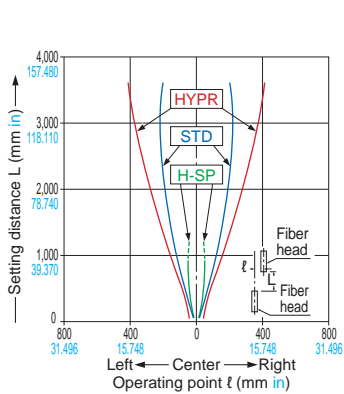



FT-R40 Thru-beam type

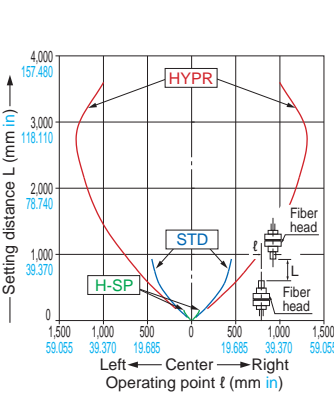

FT-R41W Thru-beam type

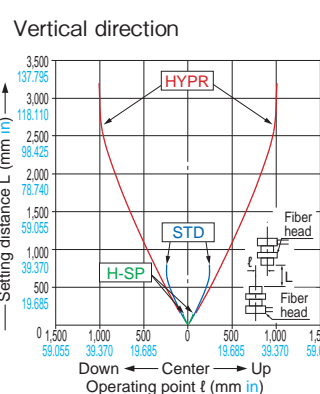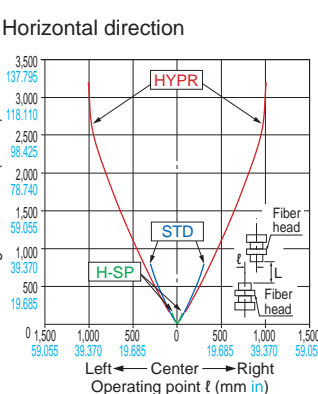

FT-R42W Thru-beam type

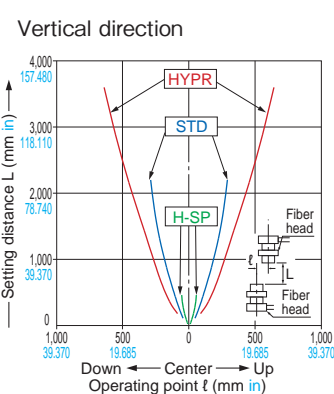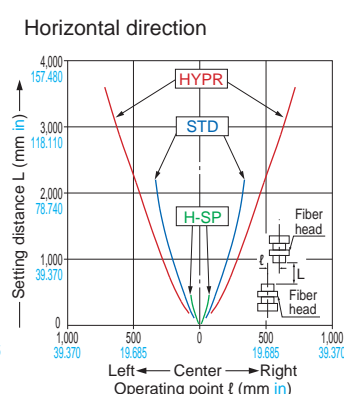

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others


Amplifiers
FX-500 series
FX-100 series

INDEX


SENSING CHARACTERISTICS (TYPICAL)

Thru-beam type Parallel deviation Sensing characteristics are listed in the alphabetic order of the Model No.


FT-R44Y Thru-beam type

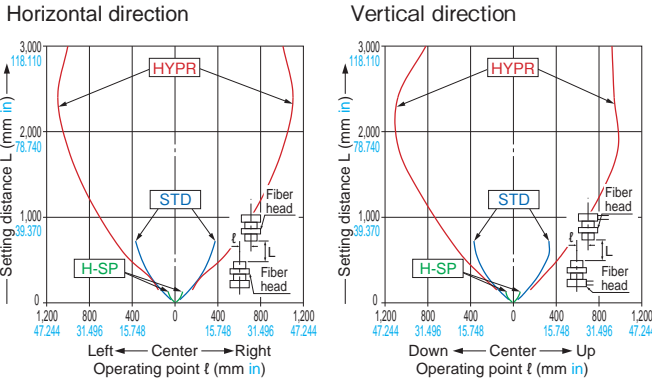


FT-R60Y Thru-beam type

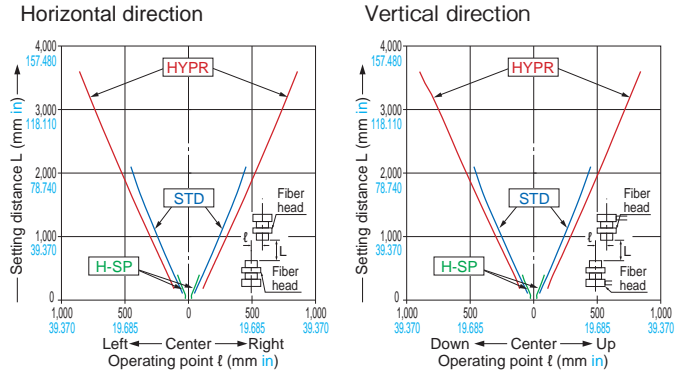


FT-S11 Thru-beam type

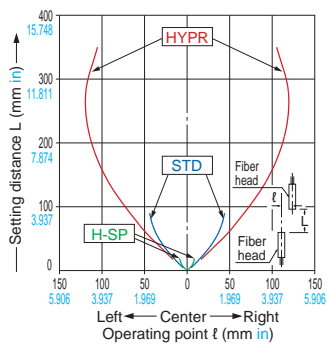


FT-S20 Thru-beam type

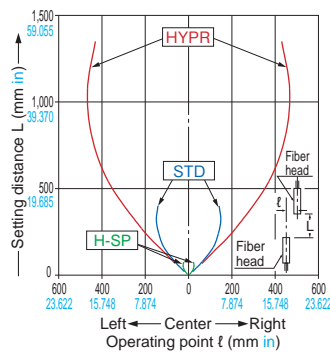


FT-S21 Thru-beam type

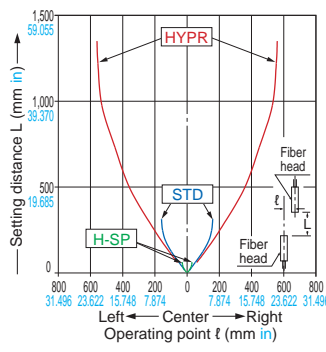


FT-S21W Thru-beam type

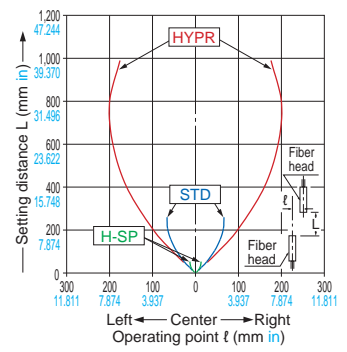


FT-S30 Thru-beam type

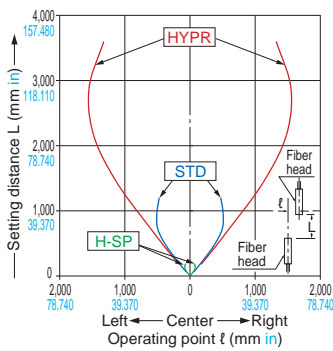


FT-S31W Thru-beam type

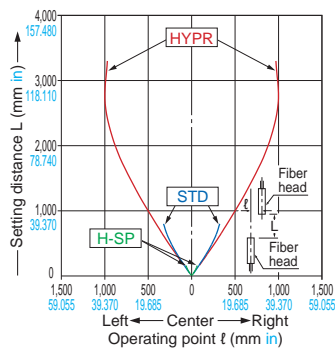


FT-S32 Thru-beam type

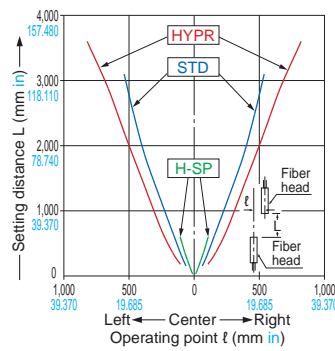

FT-V23 Thru-beam type

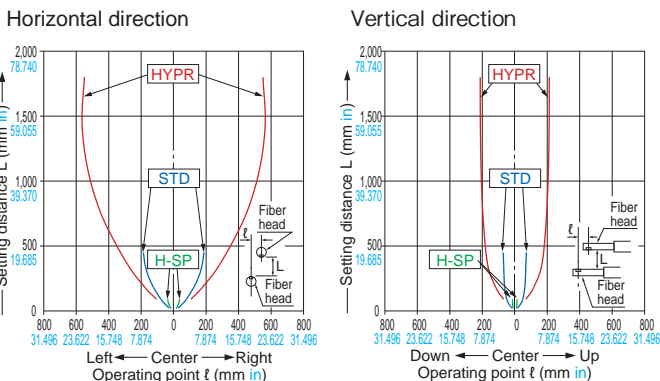



FT-V24W Thru-beam type

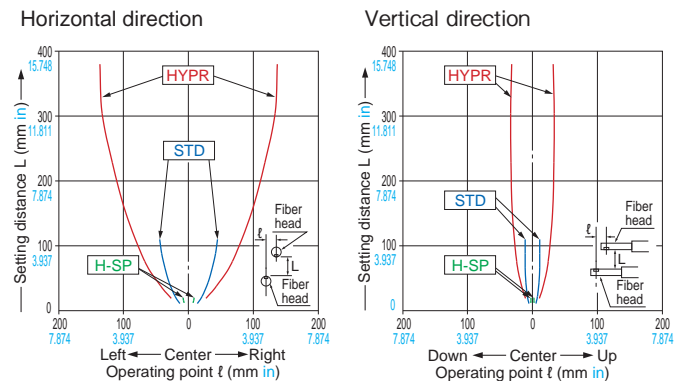



SENSING CHARACTERISTICS (TYPICAL)

Thru-beam type Parallel deviation Sensing characteristics are listed in the alphabetic order of the Model No.



FT-V25 Thru-beam type

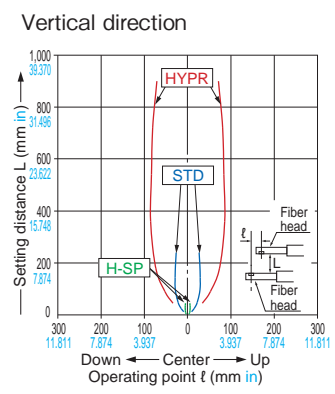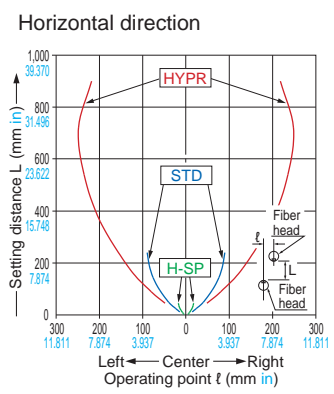



FT-V30 Thru-beam type

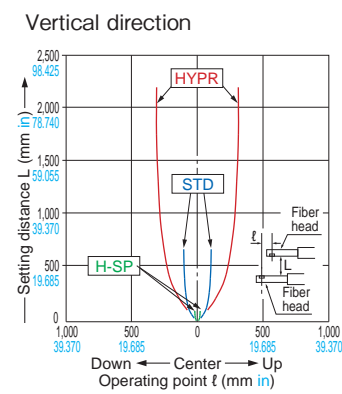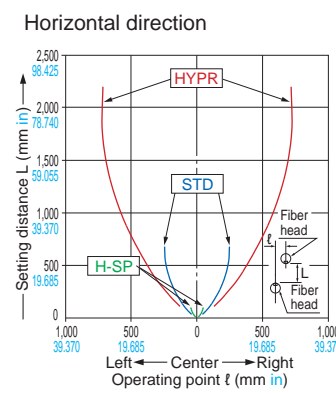


FT-V40 Thru-beam type

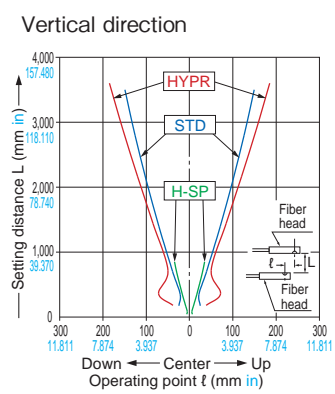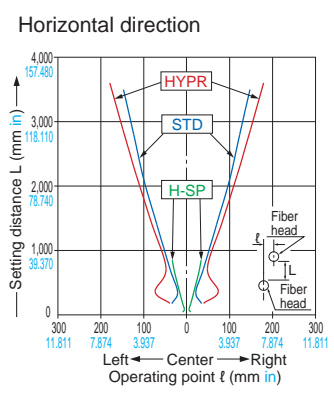



FT-V80Y Thru-beam type

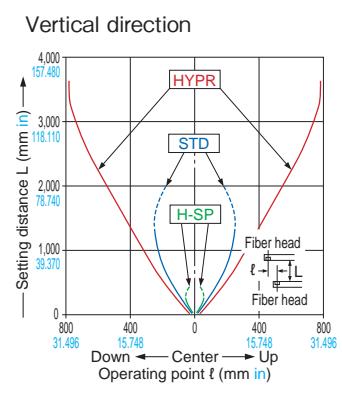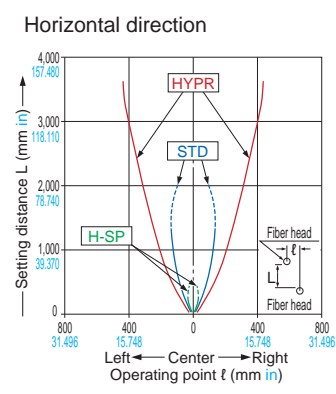


FT-Z20HBW Thru-beam type

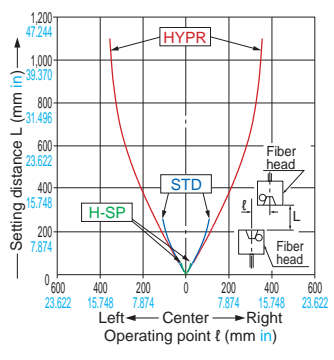



FT-Z20W Thru-beam type

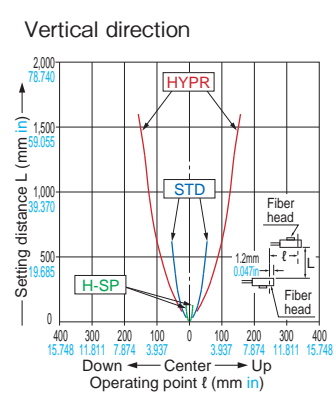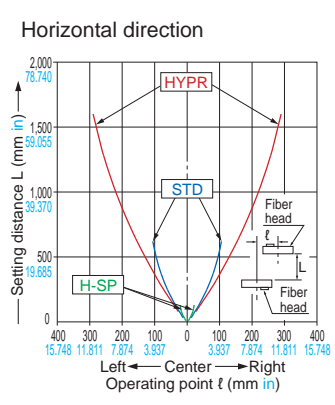

FT-Z30 Thru-beam type

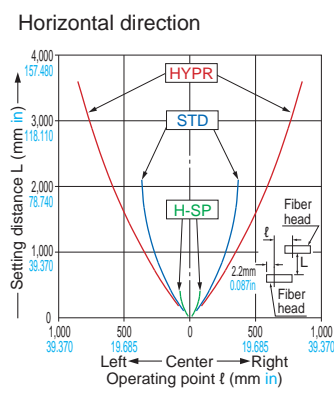

FT-Z30E Thru-beam type

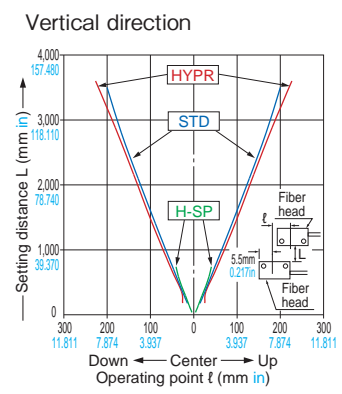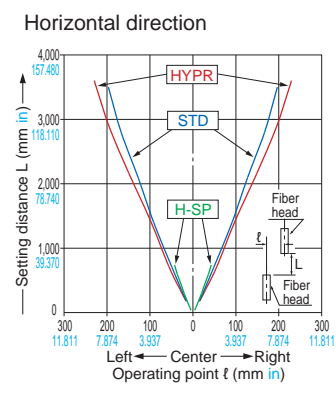

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options
Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others



Amplifiers
FX-500 series
FX-100 series

INDEX



SENSING CHARACTERISTICS (TYPICAL)

Thru-beam type Parallel deviation Sensing characteristics are listed in the alphabetic order of the Model No.



FT-Z30EW Thru-beam type

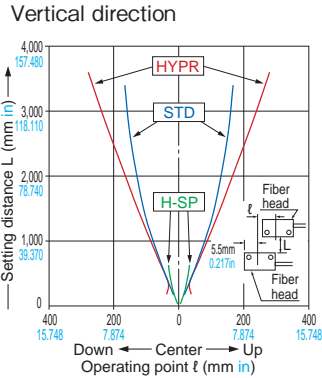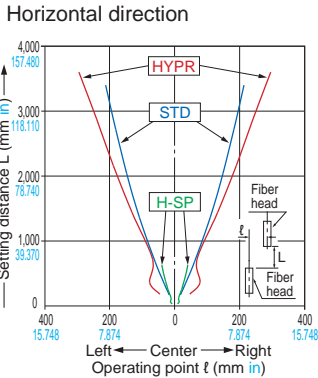



FT-Z30H Thru-beam type

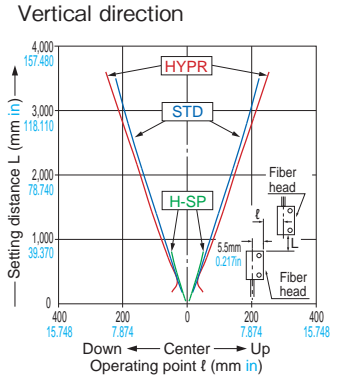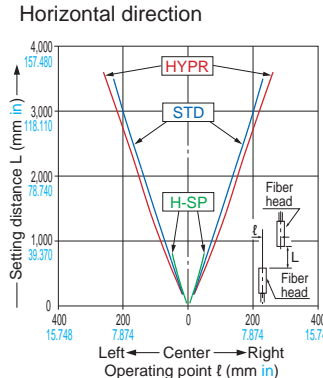



FT-Z30HW Thru-beam type

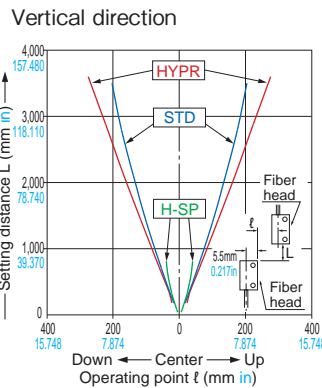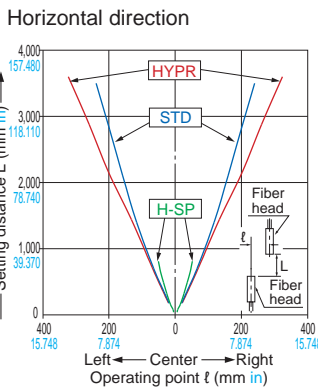


FT-Z30W Thru-beam type

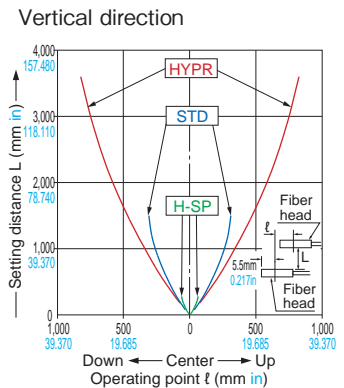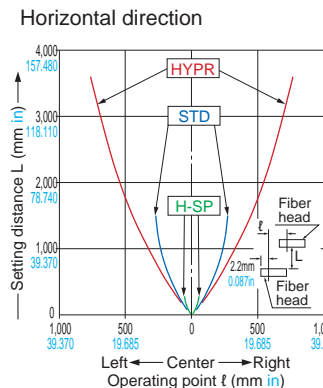


FT-Z40W Thru-beam type

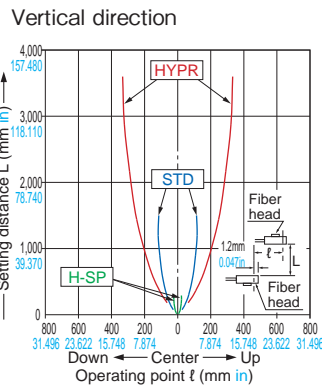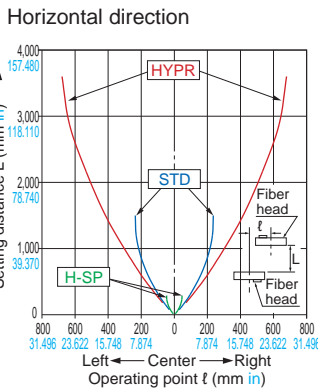

FT-Z40HBW Thru-beam type


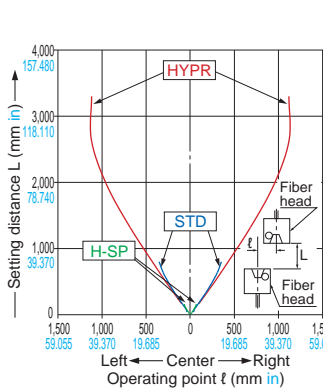


FT-Z802Y Thru-beam type


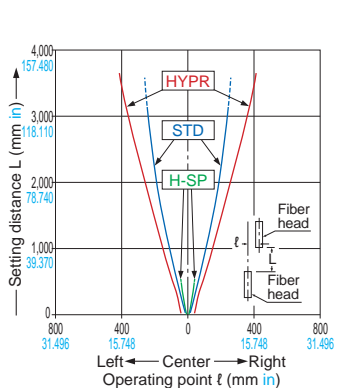


Retroreflective type Parallel deviation Sensing characteristics are listed in the alphabetic order of the Model No.

FR-KZ22E Retroreflective type

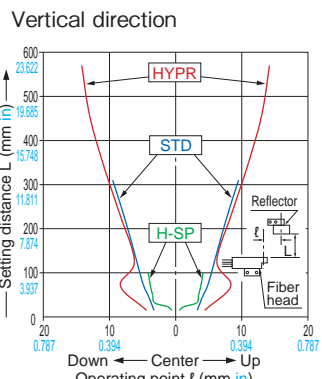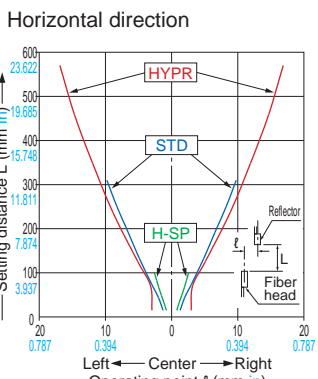

FR-KZ50E Retroreflective type

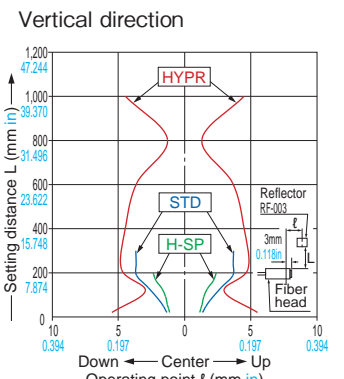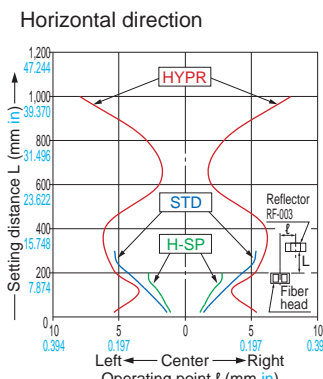


- New product introduction
- Tough Fiber
- Fiber Selection Guide
- Model
- Choose by shape/application
- How to read Model No
- Earlier models comparison table
- Fibers
- Super Quality
- Threaded Type
- Square Head Type
- Cylindrical Type
- Sleeve
- Flat Type
- Small Spot
- Narrow Beam
- Wide Beam
- Convergent Reflective Type
- Retroreflective Type
- Chemical / Oil-resistant
- Heat-resistant
- Vacuum-resistant
- Liquid Leak / Liquid Detection
- Fiber Options
- Semi-custom fibers
- Fiber Dimensions
- Thru-beam Type
- Retroreflective Type
- Reflective Type
- Others
- Amplifiers
- FX-500 series
- FX-100 series
- INDEX


SENSING CHARACTERISTICS (TYPICAL)

Retroreflective type Parallel deviation Sensing characteristics are listed in the alphabetic order of the Model No.

FR-KZ50H Retroreflective type

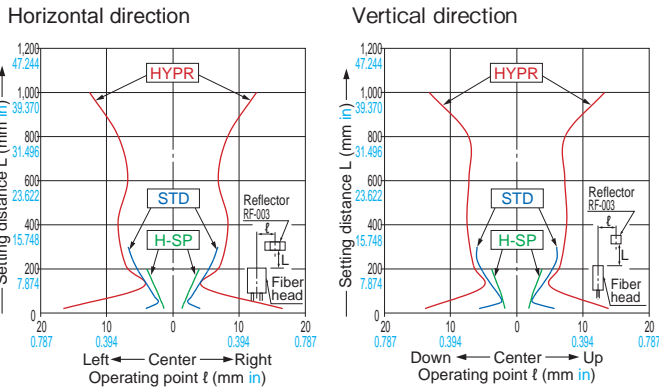


FR-Z50HW Retroreflective type

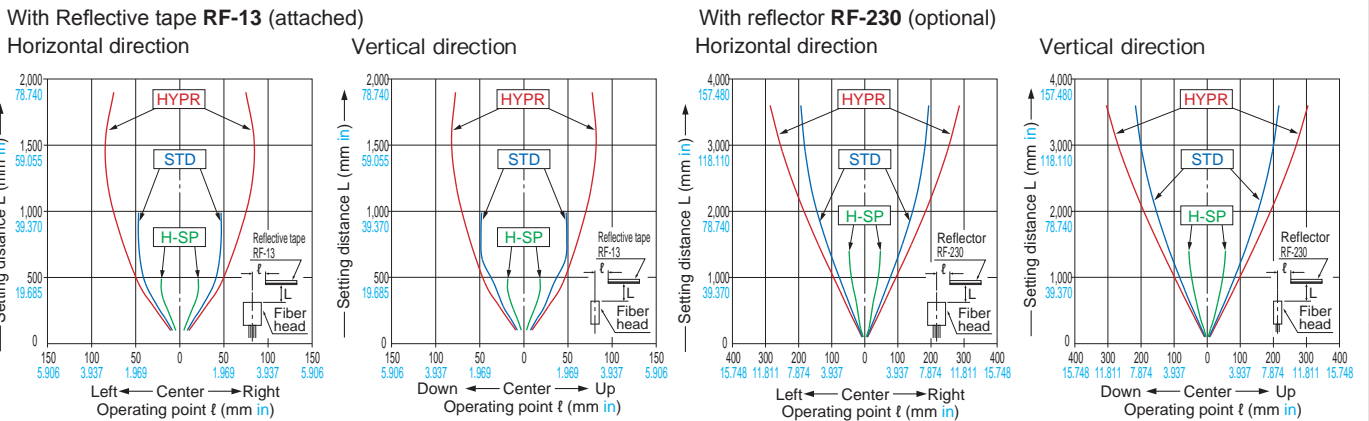


Reflective type Sensing field Sensing characteristics are listed in the alphabetic order of the Model No.


FD-30 Reflective type

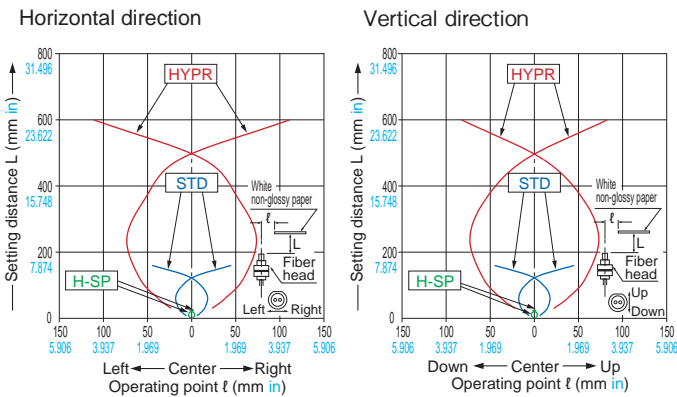


FD-31 Reflective type

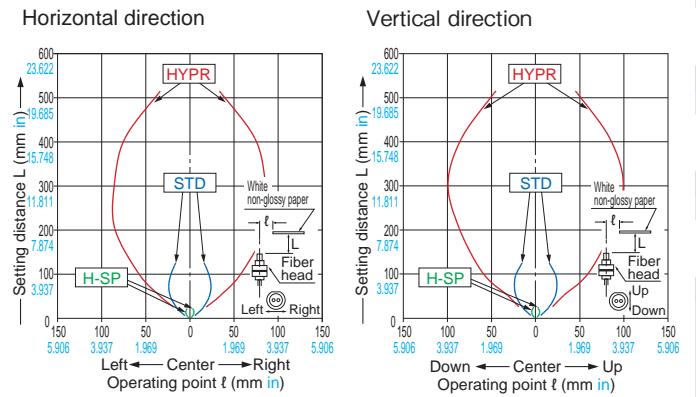

FD-31W Reflective type

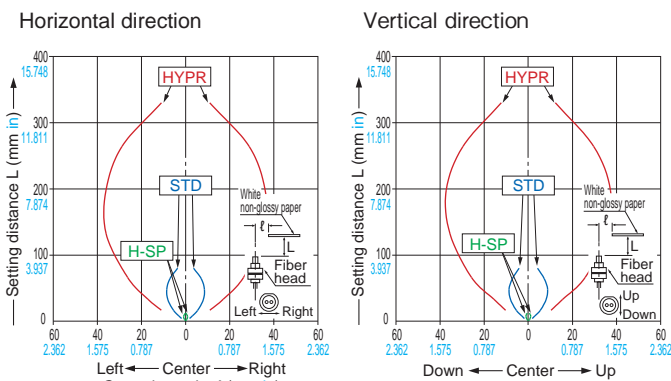

FD-32G Reflective type



New product introduction
Tough Fiber
Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Reflective Type

Others

Amplifiers


FX-500 series
FX-100 series

INDEX

SENSING CHARACTERISTICS (TYPICAL)


Reflective type Sensing field Sensing characteristics are listed in the alphabetic order of the Model No.

FD-32GX Reflective type

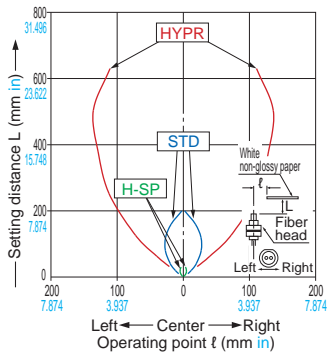


FD-40 Reflective type

Horizontal direction




Vertical direction




FD-41 Reflective type

Horizontal direction

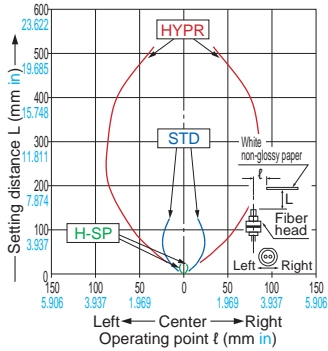


Vertical direction

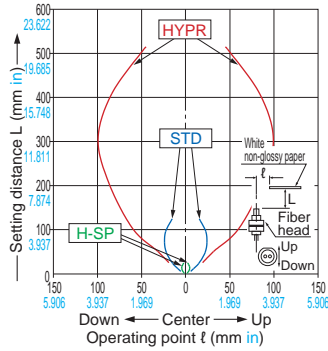


FD-41S Reflective type

Horizontal direction

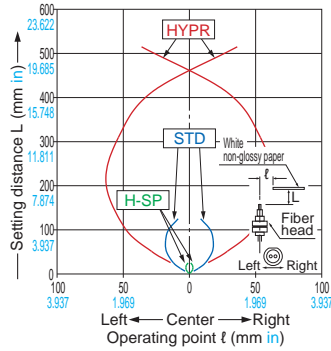


Vertical direction

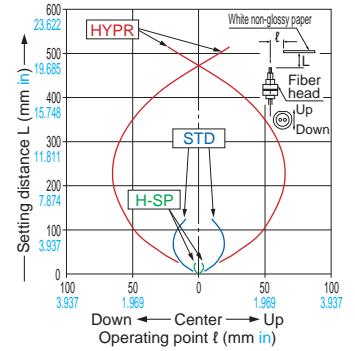


FD-41SW Reflective type

Horizontal direction




Vertical direction




FD-41W Reflective type


Horizontal direction




Vertical direction

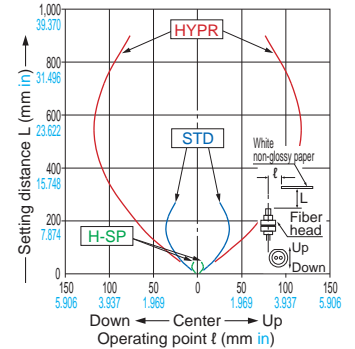

FD-42G Reflective type




FD-42GW Reflective type




FD-60 Reflective type

Horizontal direction



Vertical direction

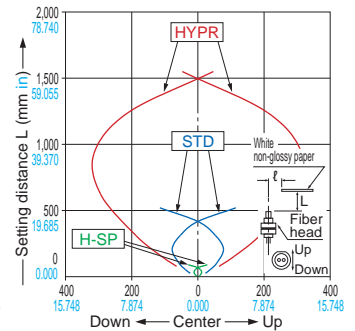


SENSING CHARACTERISTICS (TYPICAL)

Reflective type Sensing field Sensing characteristics are listed in the alphabetic order of the Model No.


FD-61

Reflective type

Horizontal direction

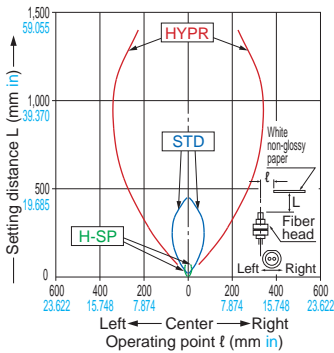


Vertical direction

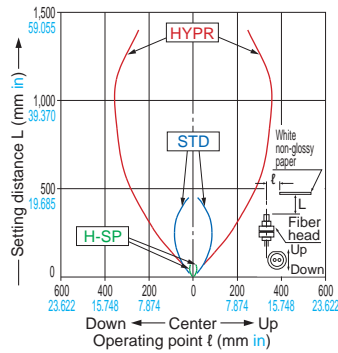

FD-61G


Reflective type

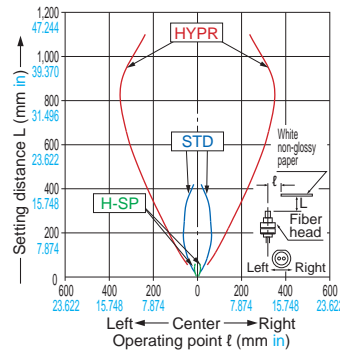


FD-61S

Reflective type

Horizontal direction

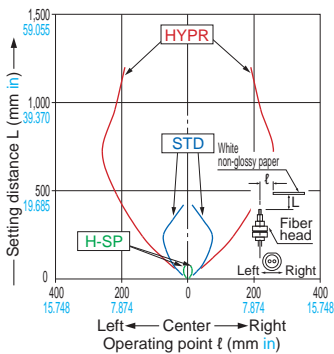


Vertical direction

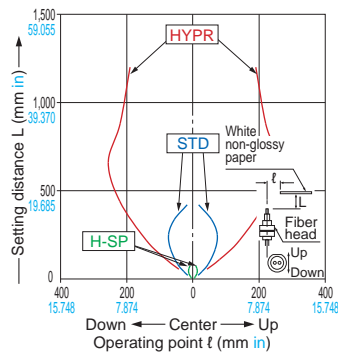


FD-61W

Reflective type

Horizontal direction

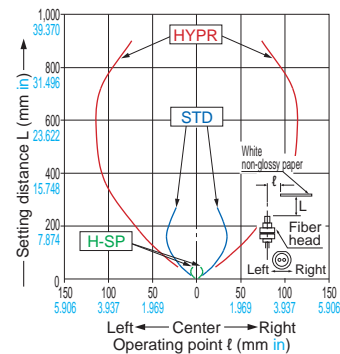


Vertical direction

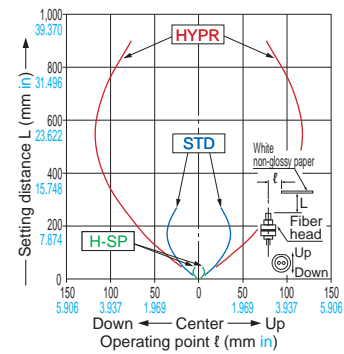


FD-62

Reflective type

Horizontal direction

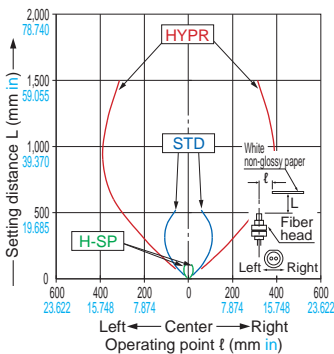


Vertical direction

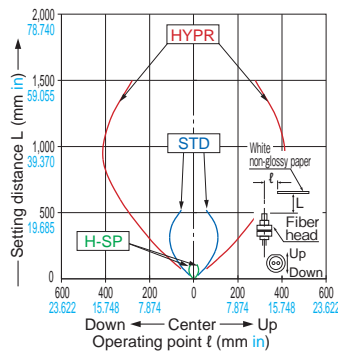


FD-64X

Reflective type

Horizontal direction

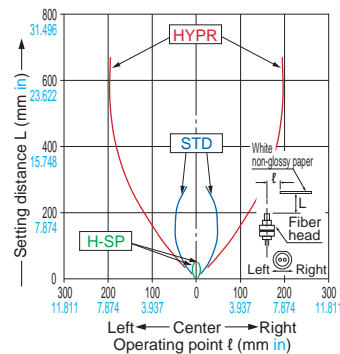


Vertical direction

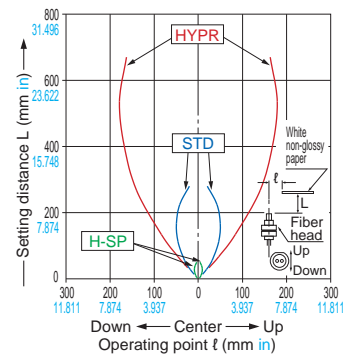


FD-A16

Reflective type

Horizontal direction

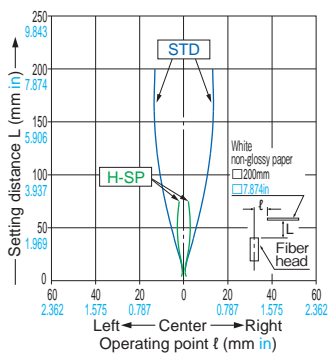


Vertical direction

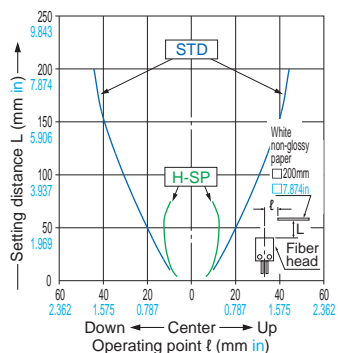


FD-AL11

Reflective type

Horizontal direction

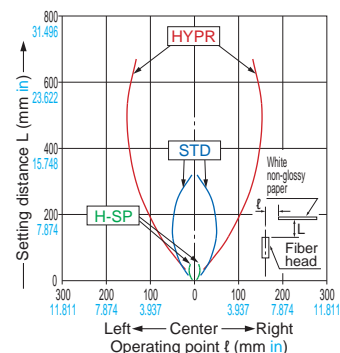

Vertical direction

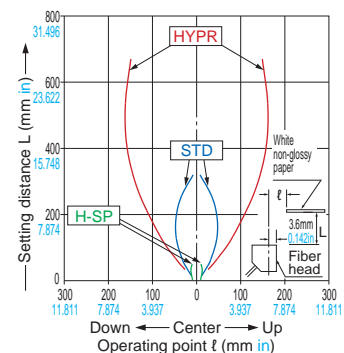

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others


Amplifiers
FX-500 series
FX-100 series

INDEX


SENSING CHARACTERISTICS (TYPICAL)

Reflective type Sensing field Sensing characteristics are listed in the alphabetic order of the Model No.


FD-E13 Reflective type

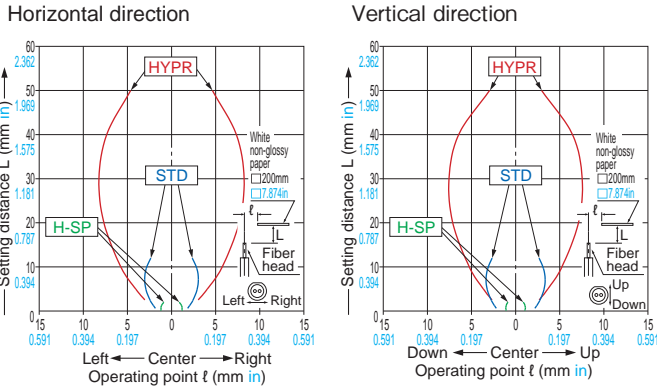


FD-E23 Reflective type

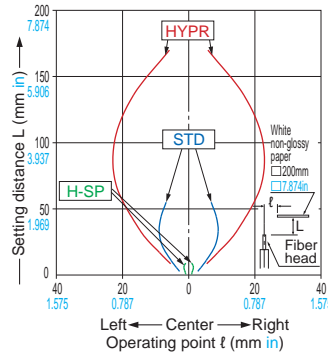


FD-EG30 Reflective type

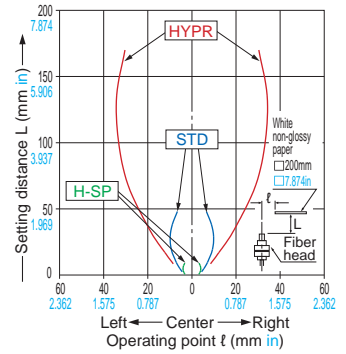


FD-EG30S Reflective type

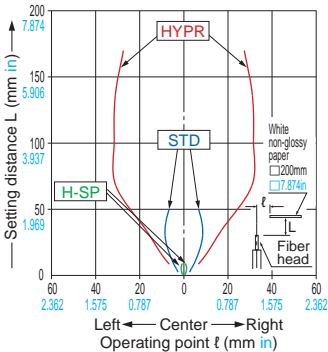


FD-EG31 Reflective type

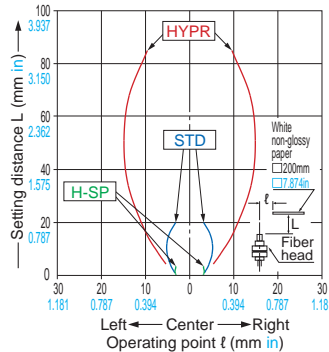


FD-H13-FM2 Reflective type

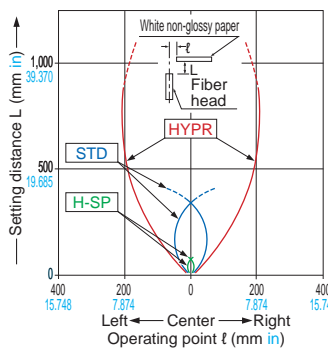


FD-H18-L31 Reflective type

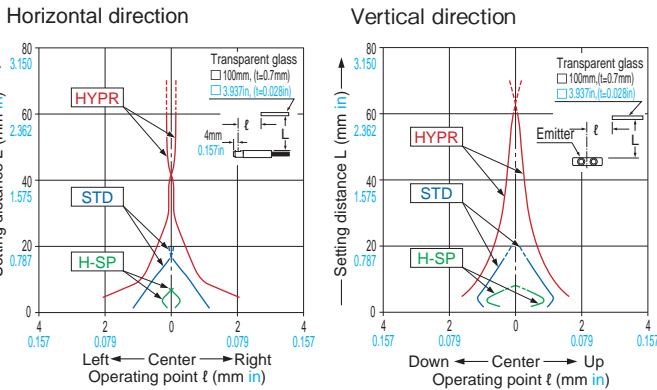


FD-H20-21 Reflective type



FD-H20-M1 Reflective type




FD-H25-L43 Reflective type

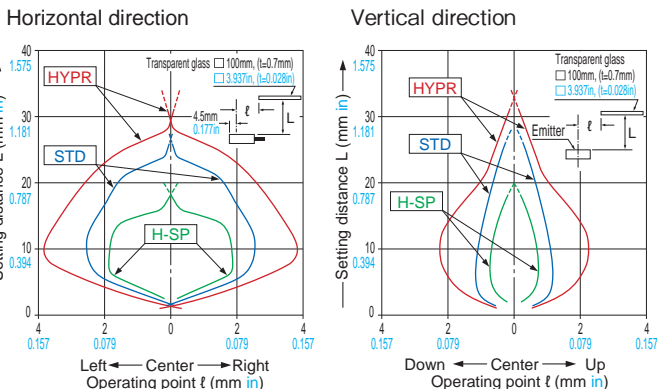


SENSING CHARACTERISTICS (TYPICAL)

Reflective type Sensing field Sensing characteristics are listed in the alphabetic order of the Model No. (Models with same sensing characteristics are grouped together.)


FD-H25-L45 Reflective type

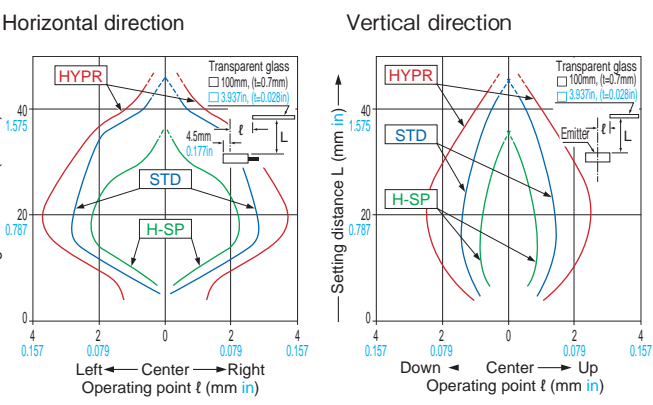


FD-H30-L32 Reflective type

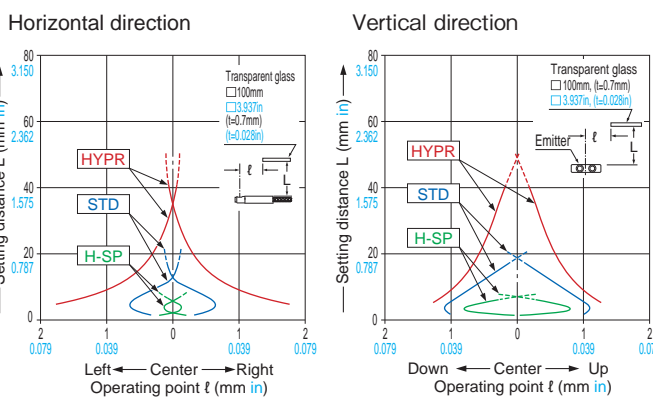


FD-H30-L32V-S Reflective type

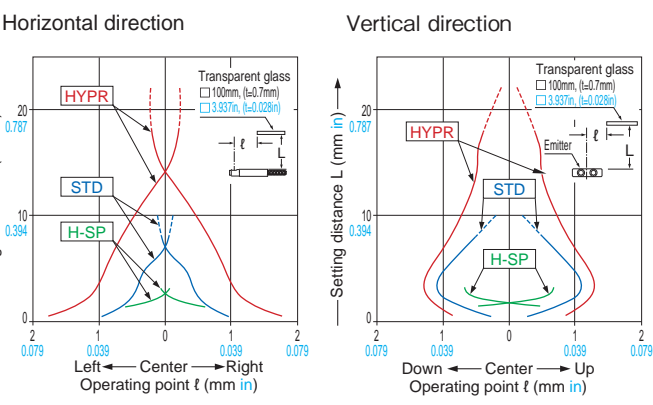


FD-H35-20S Reflective type

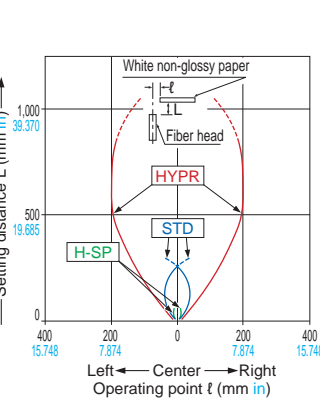


FD-H35-M2 Reflective type
FD-H35-M2S6

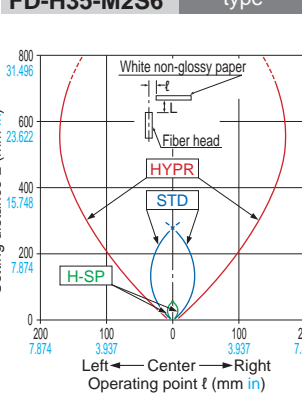


FD-L10 Reflective type

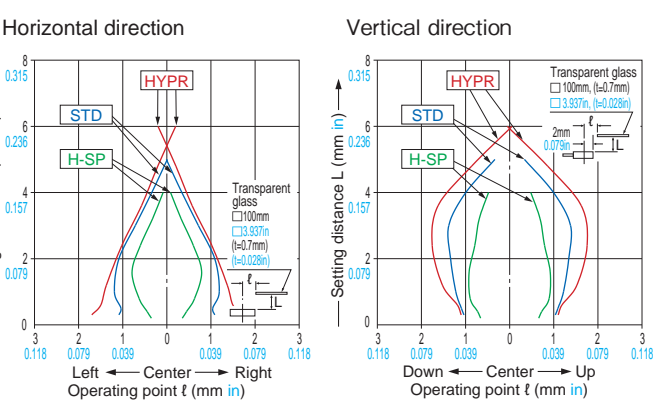


FD-L11 Reflective type

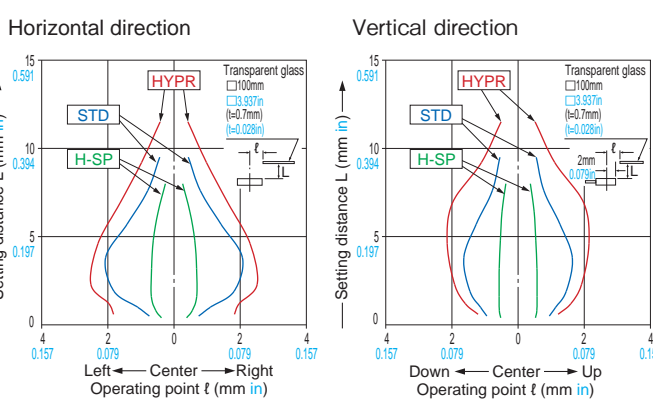

FD-L12W Reflective type

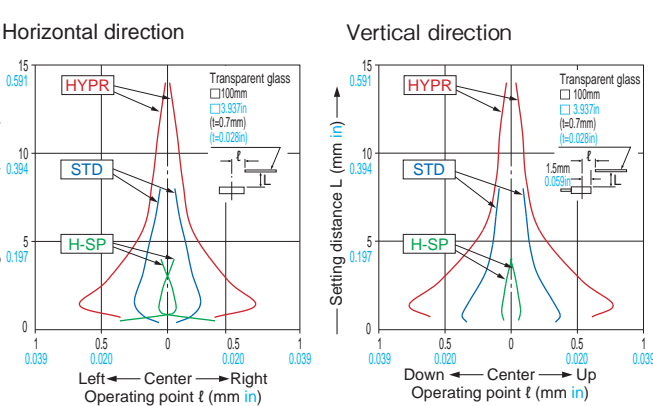

FD-L20H Reflective type

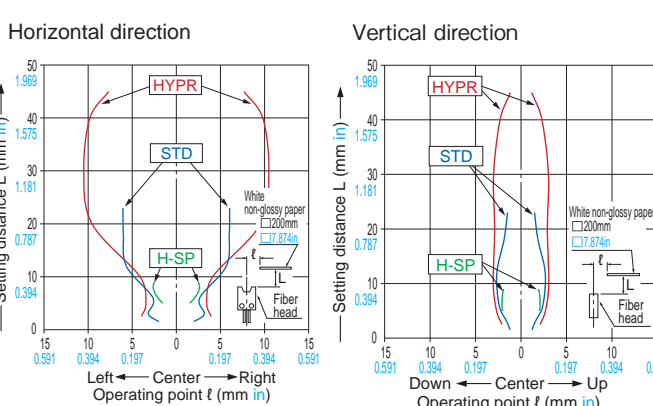

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options
Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others


Amplifiers
FX-500 series
FX-100 series

INDEX


SENSING CHARACTERISTICS (TYPICAL)

Reflective type Sensing field Sensing characteristics are listed in the alphabetic order of the Model No.


FD-L21 Reflective type

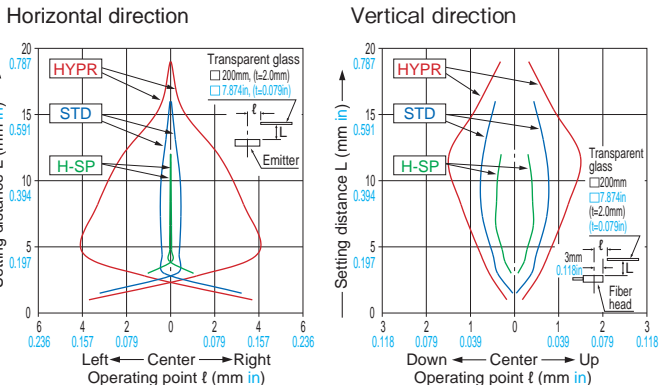


FD-L21W Reflective type

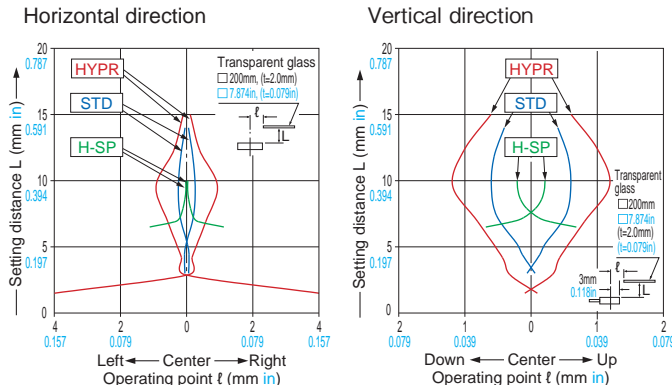


FD-L22A Reflective type

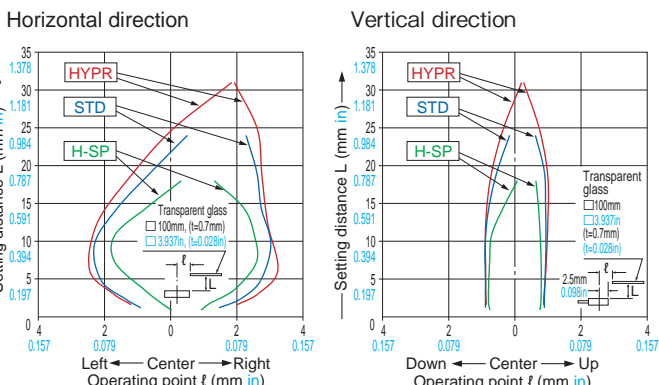


FD-L23 Reflective type

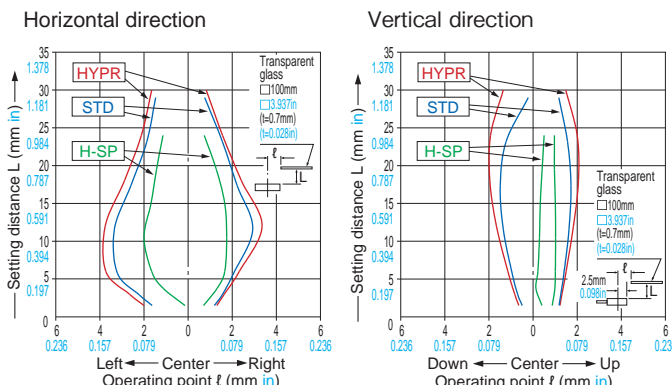


FD-L30A Reflective type

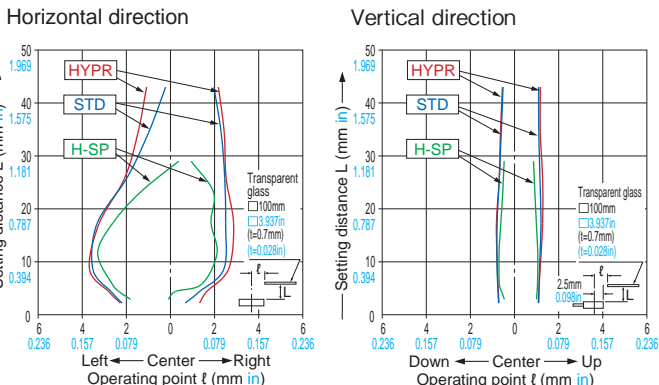


FD-L31A Reflective type

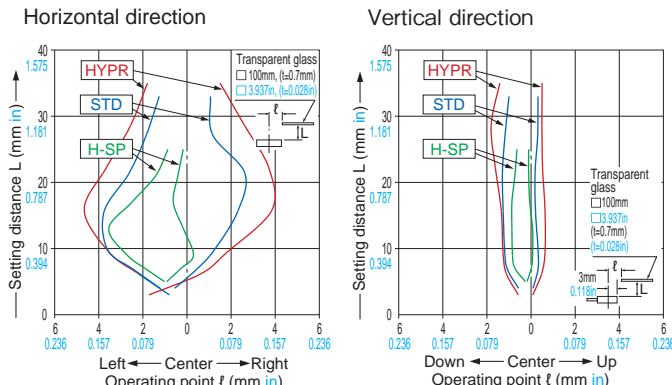

FD-L32H Reflective type

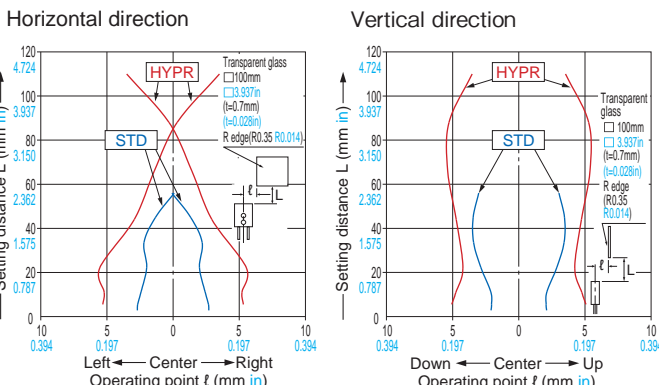

FD-R60 Reflective type

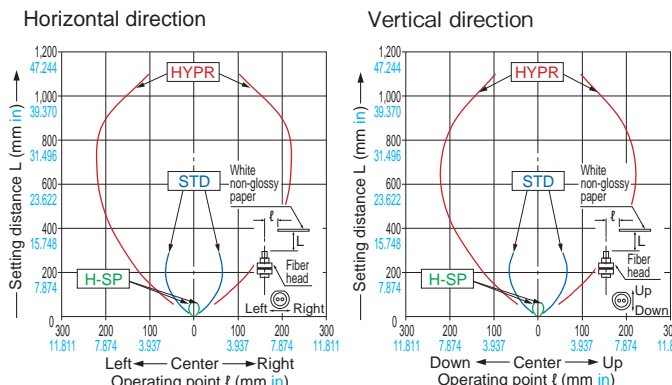


- Fiber Selection Guide
- Model
- Choose by shape/application
- How to read Model No
- Earlier models comparison table
- Fibers
- Super Quality
- Threaded Type
- Square Head Type
- Cylindrical Type
- Sleeve
- Flat Type
- Small Spot
- Narrow Beam
- Wide Beam
- Convergent Reflective Type
- Retroreflective Type
- Chemical / Oil-resistant
- Heat-resistant
- Vacuum-resistant
- Liquid Leak / Liquid Detection
- Fiber Options
- Semi-custom fibers
- Fiber Dimensions
- Thru-beam Type
- Retroreflective Type
- Reflective Type
- Others
- Amplifiers
- FX-500 series
- FX-100 series
- INDEX


SENSING CHARACTERISTICS (TYPICAL)

Reflective type Sensing field Sensing characteristics are listed in the alphabetic order of the Model No.


FD-R61Y Reflective type

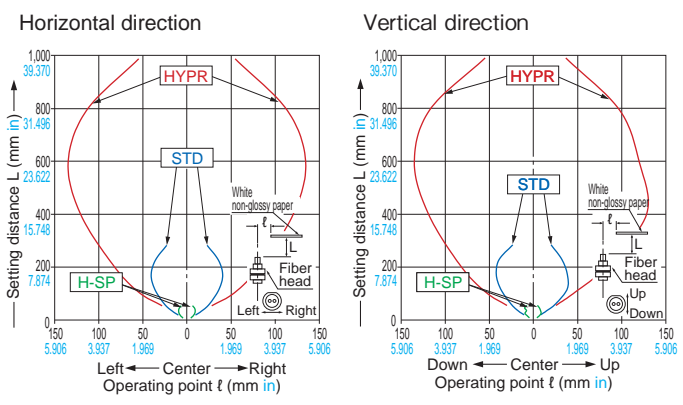


FD-S21 Reflective type

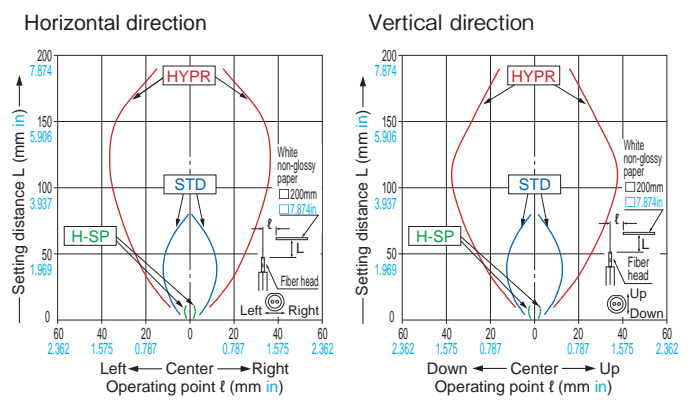


FD-S30 Reflective type

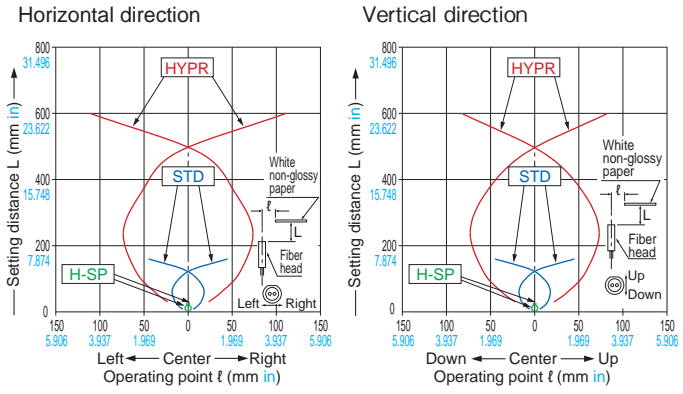


FD-S31 Reflective type

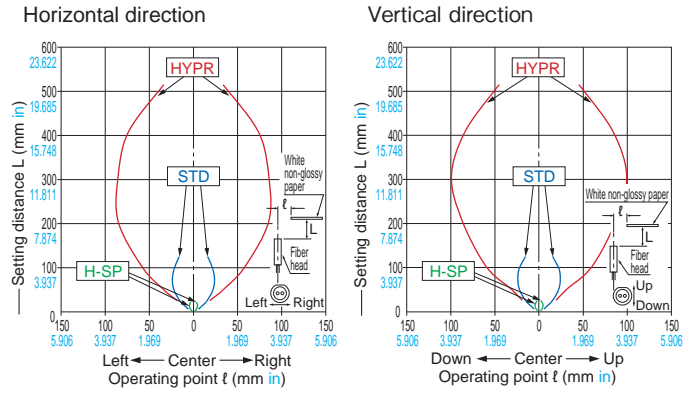


FD-S32 Reflective type

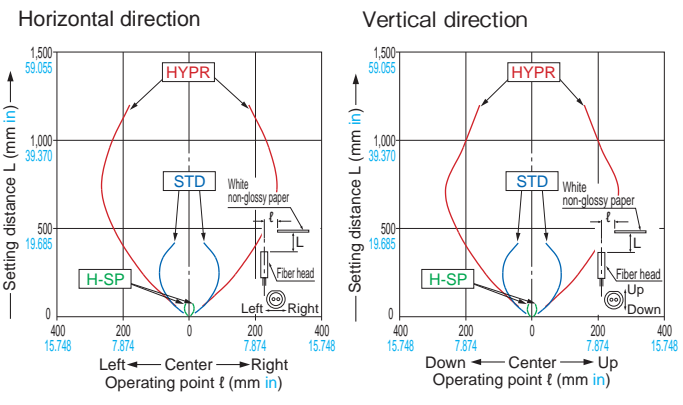


FD-S32W Reflective type

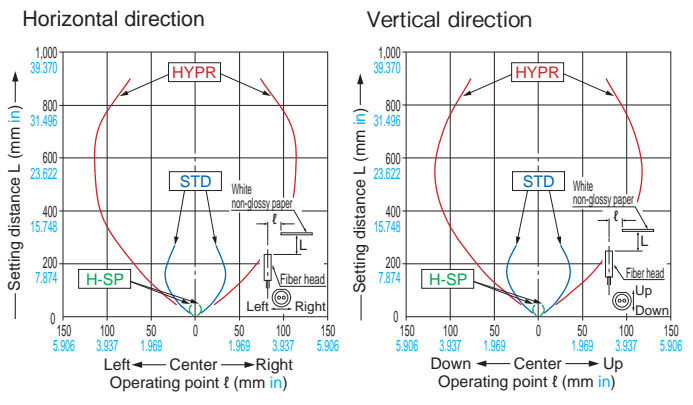

FD-S33GW Reflective type

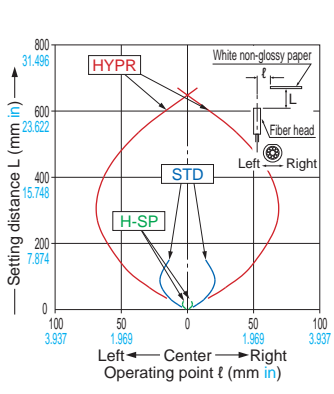

FD-S60Y Reflective type

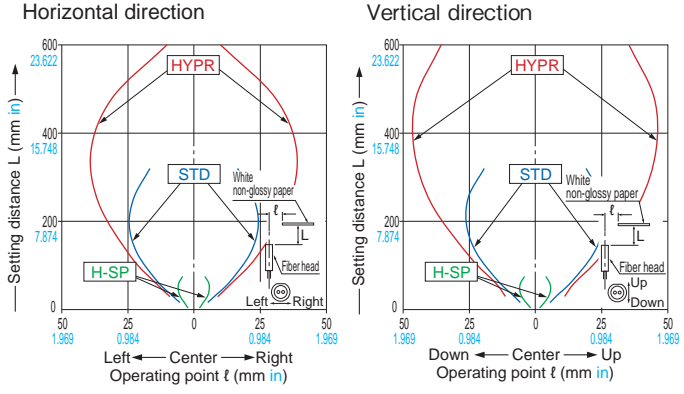

New product introduction

Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No.

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers

FX-500 series


FX-100 series

INDEX


SENSING CHARACTERISTICS (TYPICAL)

Reflective type Sensing field Sensing characteristics are listed in the alphabetic order of the Model No.


FD-V30 Reflective type

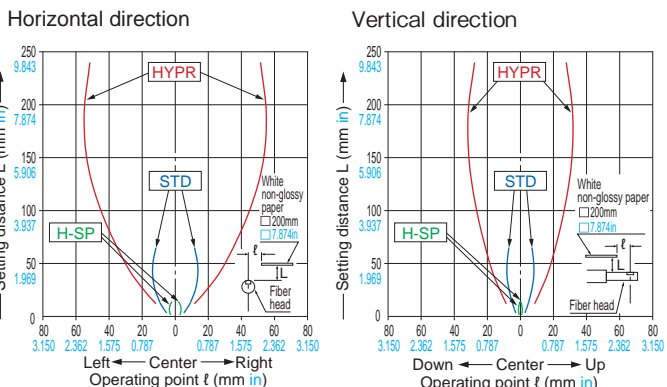


FD-V30W Reflective type

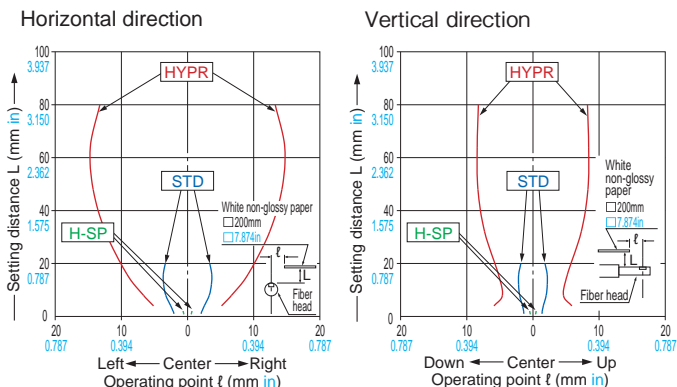


FD-V50 Reflective type

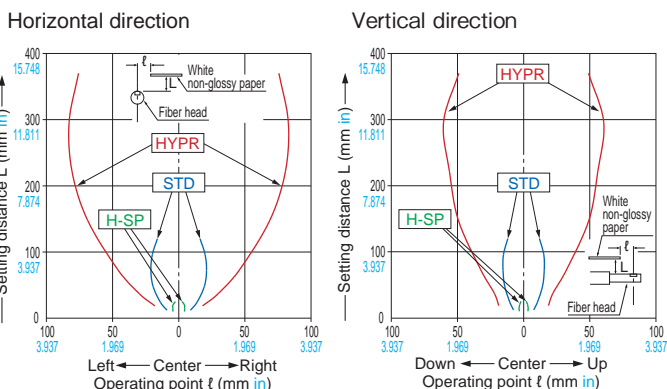


FD-Z20HBW Reflective type

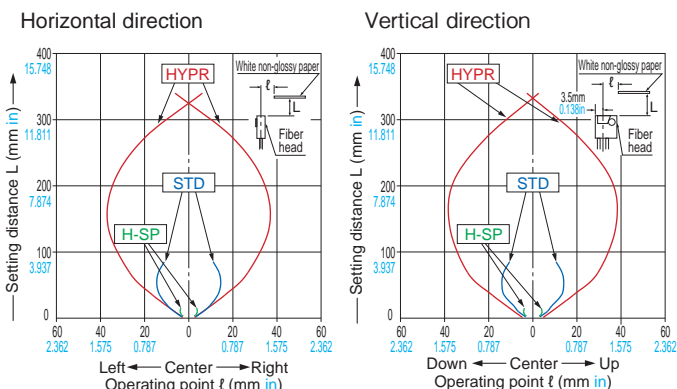


FD-Z20W Reflective type

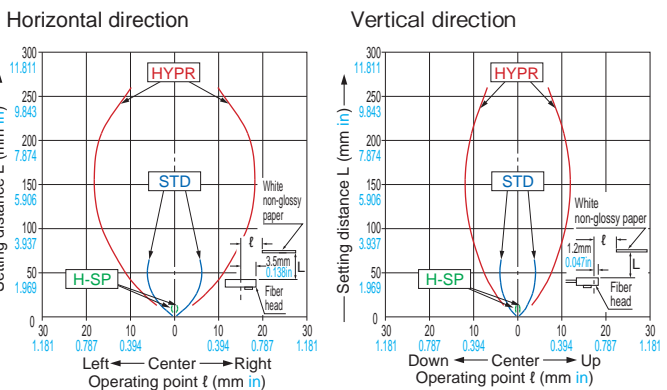


FD-Z40HBW Reflective type

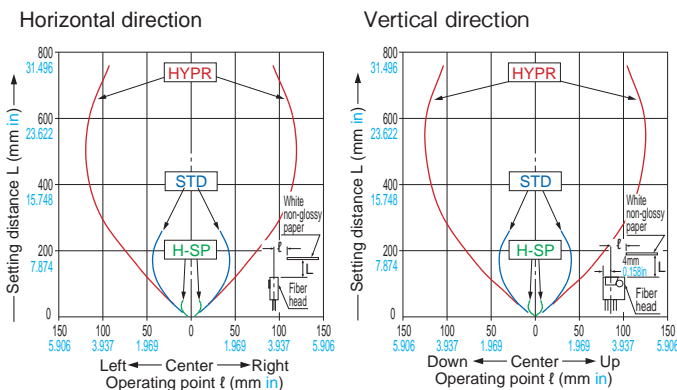

FD-Z40W Reflective type

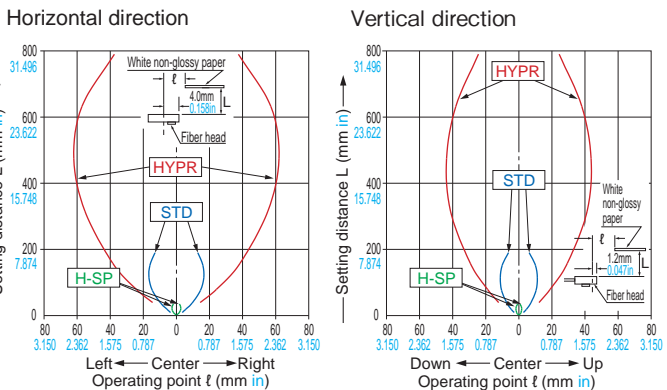

FD-Z50HW Reflective type

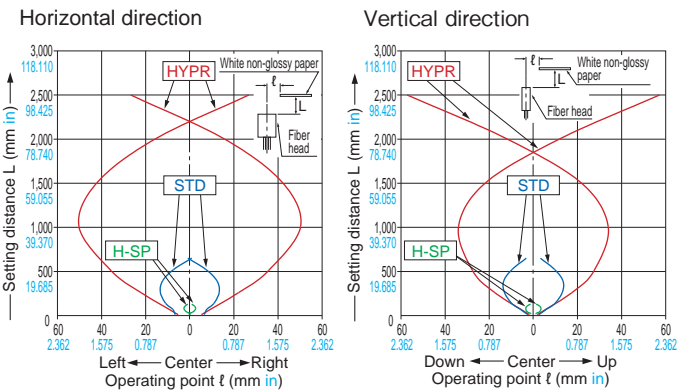

PRECAUTIONS FOR PROPER USE

Refer to the "PRO mode operation manual" on our website for details.



- Never use this product as a sensing device for personnel protection.
- In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.

Wiring

- Make sure that the power supply is OFF while adding or removing the amplifiers.
- Note that if a voltage exceeding the reted range is applied, or if an AC power supply is directly connected, the product may get burnt or damaged.
- Note that short-circuit of the load or wrong wiring may burn or damage the product.
- Do not run the wires together with high-voltage lines or power lines, or put them in the same raceway. This can cause malfunction due to induction.
- Verify that the supply voltage variation is within the rating.
- If power is supplied from a commercial switching regulator, ensure that the frame ground (F.G.) terminal of the power supply is connected to an actual ground.
- In case noise generating equipment (switching regulator, inverter motor, etc.) is used in the vicinity of this product, connect the frame ground (F.G.) terminal of the equipment to an actual ground.
- Make sure to use the quick-connection cable (optional) for the connection of the controller. Extension up to total 100 m [328.084 ft](#) is possible with 0.3 mm² or more, cable. However, in order to reduce noise, make the wiring as short as possible.
- Make sure that stress by forcible bending or pulling is not applied to the sensor cable joint and fiber cable.

Others

- Our products have been developed / produced for industrial use only.
- The specification may not be satisfied in a strong magnetic field.
- The ultra long distance (U-LG, HYPR) mode is more likely to be affected by extraneous noise since the sensitivity of that is higher than the other modes. Make sure to check the environment before use.
- Do not use during the initial transient time (H-SP, FAST, STD: 0.5 sec., LONG, U-LG, HYPR: 1 sec.) after the power supply is switched ON.
- These sensors are only for indoor use.
- Avoid dust, dirt, and steam.
- Make sure that the product does not come in contact with oil, grease, organic solvents such as thinner, etc., strong acid or alkaline.
- This product cannot be used in an environment containing inflammable or explosive gases.
- Never disassemble or modify this product.
- This product adopts EEPROM. Settings cannot be done a million times or more because of the EEPROM's lifetime.

New product introduction

Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No.

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers

FX-500 series


FX-100 series

INDEX


PRECAUTIONS FOR PROPER USE

Abstract from "PRO MODE OPERATION MANUAL"

PRO mode

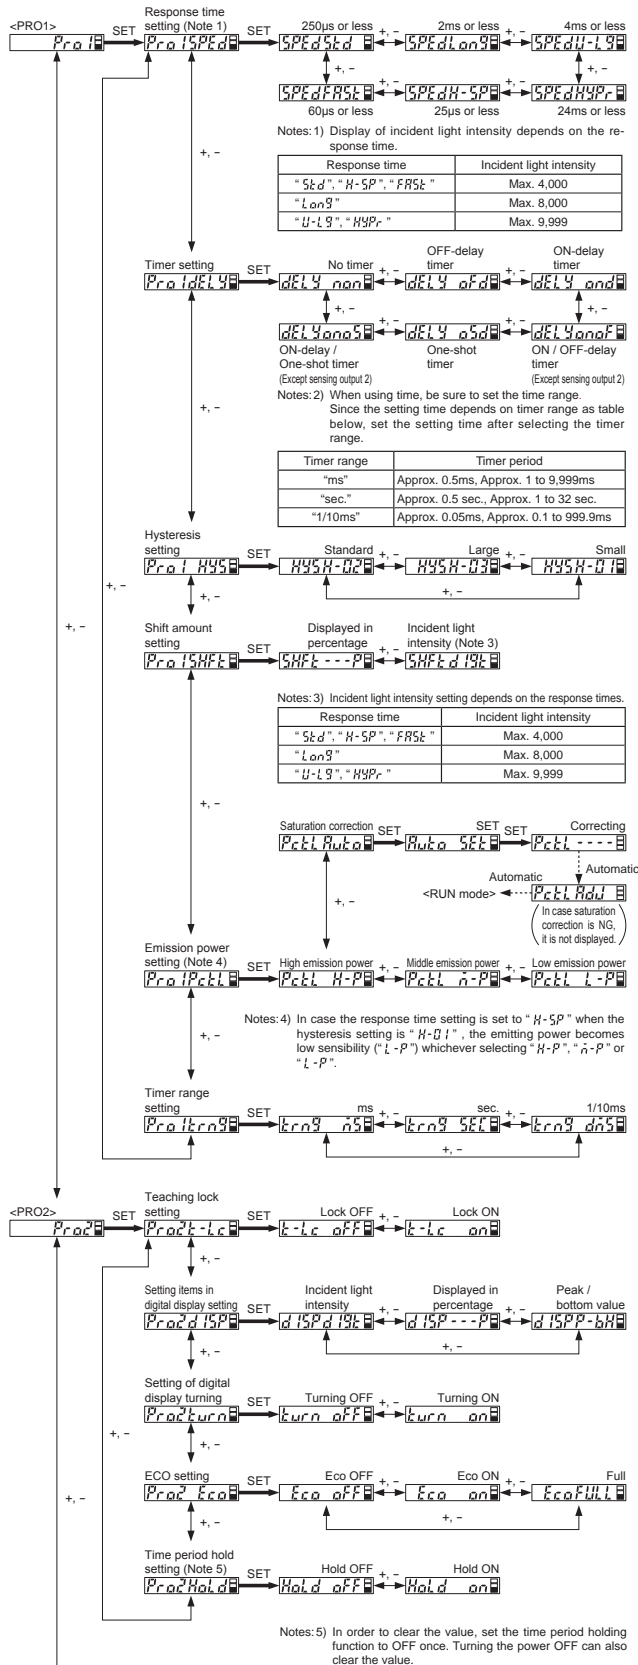


Part description



Symbol explanation

- SET → Press the SET key.
- +/- → Press the UP (+) key or DOWN (-) key.
- Automatic → Automatically move to next

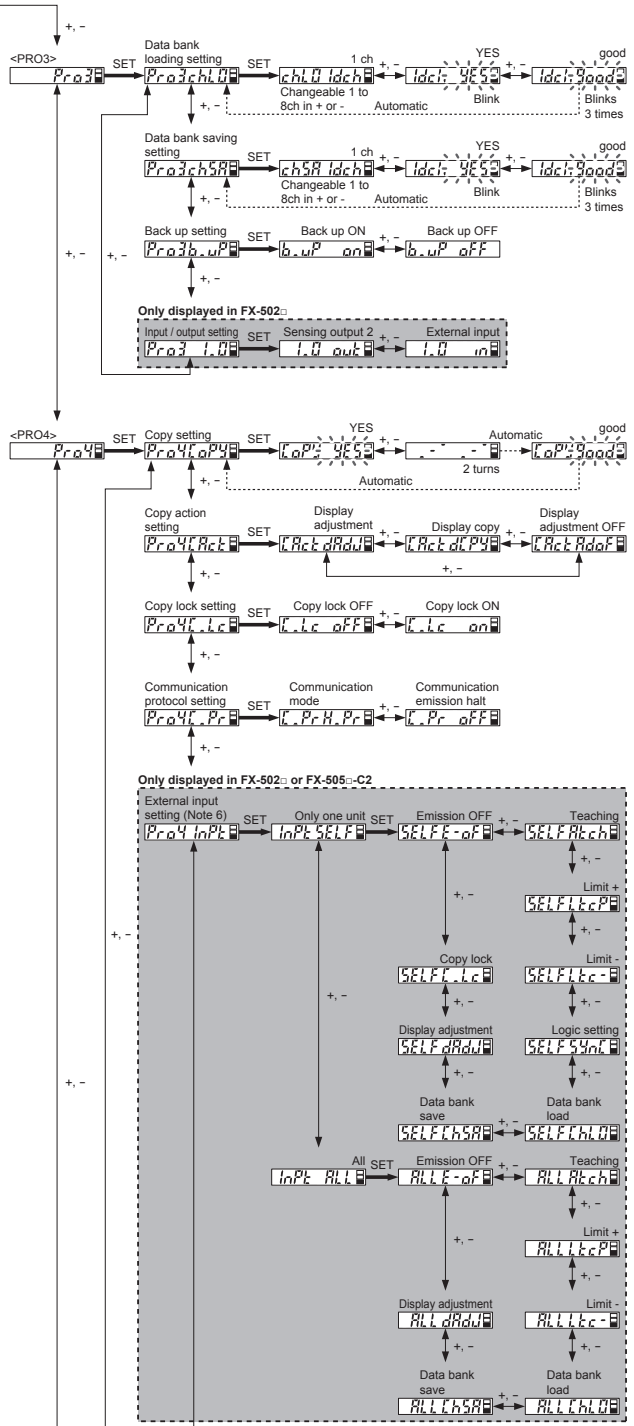

Notes: 6) The signal input time from outside is as follows.

| | Input time |
|-----------------------------|--|
| 2 point teaching | 20 to under 500ms |
| Limit teaching | |
| Display adjust | |
| Full auto teaching | 600ms or more (sampling during input) |
| Emission OFF, Logic setting | 2ms or more (conducted during inputting) |
| Copy lock | |
| Data bank loading | Input pulse of the specified channel number (1 pulse: 16 to 300ms). However, the pulse cycle is under 500ms. |
| Data bank saving | |

PRECAUTIONS FOR PROPER USE

Abstract from "PRO MODE OPERATION MANUAL"

New product introduction
Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers

Super Quality
Threaded Type
Square Head Type
Cylindrical Type

Sleeve
Flat Type
Small Spot

Narrow Beam
Wide Beam

Convergent Reflective Type
Retroreflective Type

Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions



Thru-beam Type
Retroreflective Type
Reflective Type

Others

Amplifiers


FX-500 series
FX-100 series

INDEX

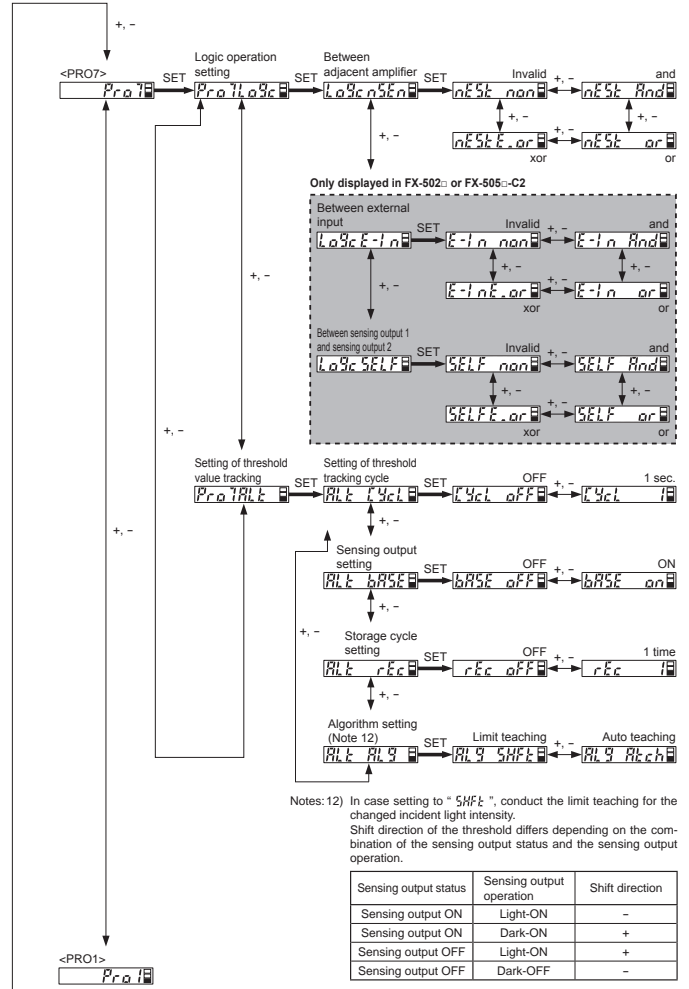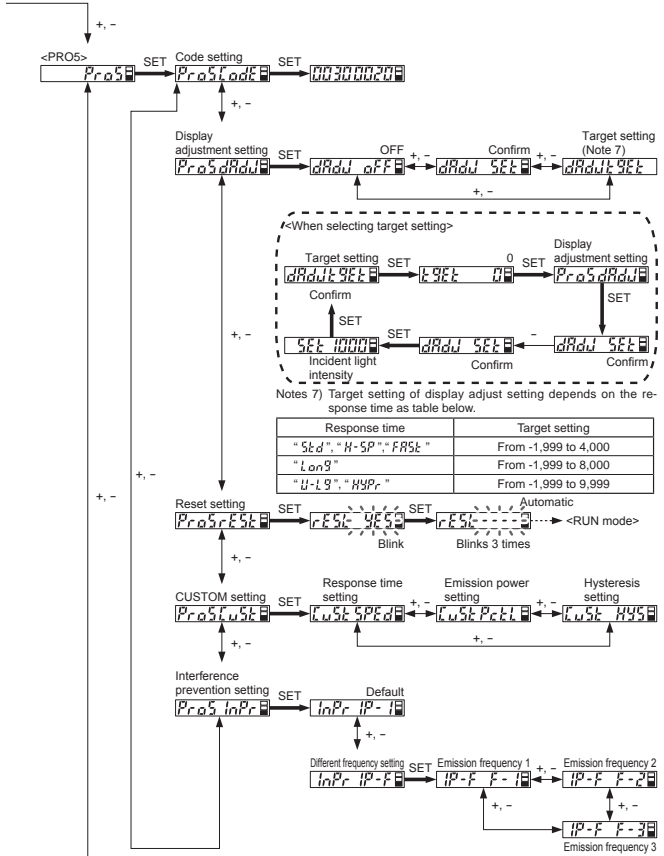

Notes: 12) In case setting to "SHt", conduct the limit teaching for the changed incident light intensity.
Shift direction of the threshold differs depending on the combination of the sensing output status and the sensing output operation.

| Sensing output status | Sensing output operation | Shift direction |
|-----------------------|--------------------------|-----------------|
| Sensing output ON | Light-ON | - |
| Sensing output ON | Dark-ON | + |
| Sensing output OFF | Light-ON | + |
| Sensing output OFF | Dark-OFF | - |

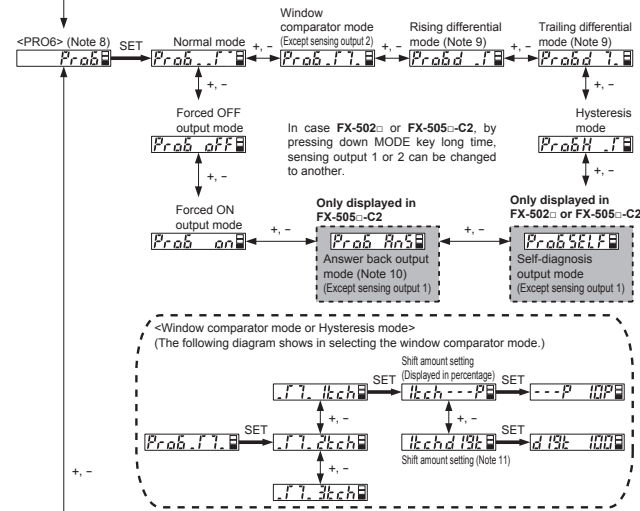

- Notes: 8) Set the sensing output setting after input / output setting for FX-502.
 - 9) In case using in differential mode, set threshold value 20 or more when the hysteresis setting is "H-01" and set threshold value 80 or more when the hysteresis setting is "H-02" or "H-03".
 - 10) After external input, the time given until an answer back output is as follows. However, in case timer of the sensing output 2 is valid, the output time is different from the following table.
- | | Input time |
|--------------------|--|
| 2 point teaching | After 20ms from the input end, the answer back output is read out when result of the teaching is "Good". |
| Limit teaching | |
| Full auto teaching | |
| Display adjust | After 20ms from the input end, the answer back output is read out. |
| Data bank loading | After 520ms from rising of fast input pulse, the answer back output (pulse) of the number of channel in the data bank is read out. |
| Data bank saving | |

11) Incident light intensity depends on the response time as table below.


| Response time | Incident light intensity |
|-----------------------|--------------------------|
| "Std", "H-SP", "FRSt" | Max. 4,000 |
| "Long" | Max. 8,000 |
| "U-LG", "HYPr" | Max. 9,999 |

DIMENSIONS (Unit: mm in)

Refer to p.48 ~ for details of fiber dimensions.


The CAD data in the dimensions can be downloaded from our website.

FX-501(P) FX-502(P) Amplifier

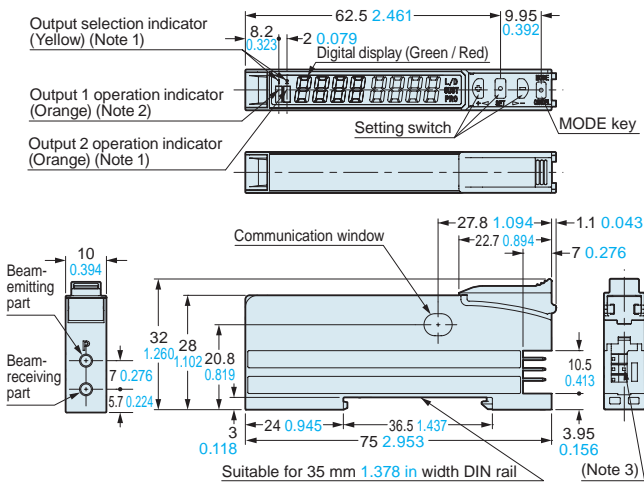

- Notes: 1) FX-502(P) only
- 2) FX-501(P): Operation indicator
- 3) FX-501(P): 3-pin, FX-502(P): 4-pin



FX-505-C2 FX-505P-C2 Amplifier

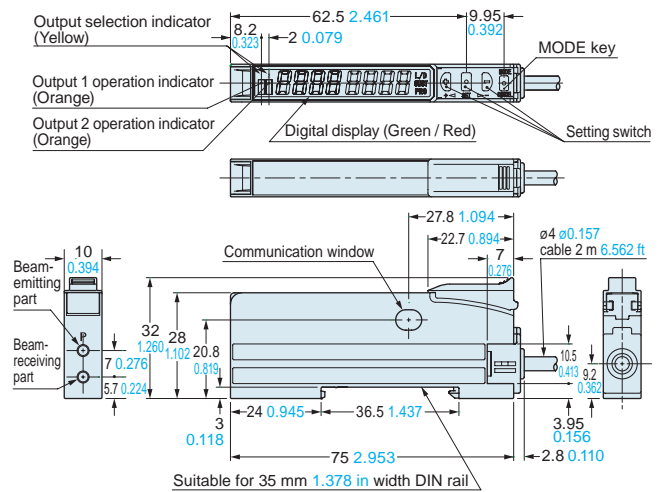

CN-73-C□ CN-74-C□ Main cable (Optional)

• Length L

| Model No. | Length L |
|-------------|---------------|
| CN-73/74-C1 | 1,000 39.370 |
| CN-73/74-C2 | 2,000 78.740 |
| CN-73/74-C5 | 5,000 196.850 |

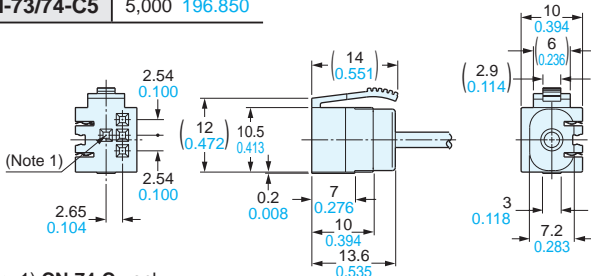



- Notes: 1) CN-74-C□ only
- 2) CN-73-C□: 3-core

CN-71-C□ CN-72-C□ Sub cable (Optional)


• Length L

| Model No. | Length L |
|-------------|---------------|
| CN-71/72-C1 | 1,000 39.370 |
| CN-71/72-C2 | 2,000 78.740 |
| CN-71/72-C5 | 5,000 196.850 |

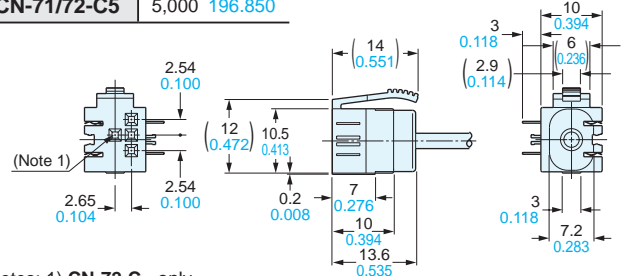


- Notes: 1) CN-72-C□ only
- 2) CN-71-C□: 1-core

MS-DIN-2 Amplifier mounting bracket (Optional)

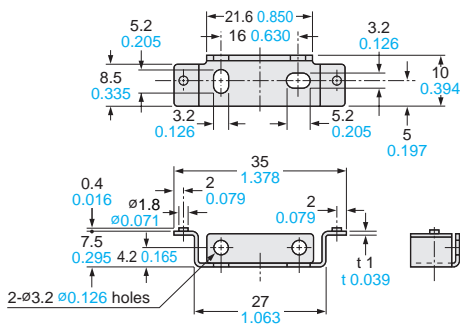

Material: Cold rolled carbon steel (SPCC) (Uni-chrome plated)

MS-DIN-E End plate (Optional)

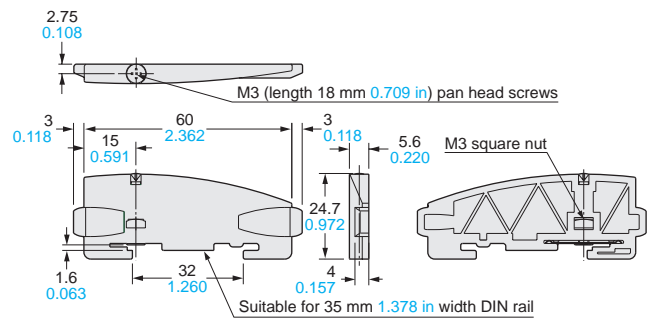

Material: Polycarbonate

New product introduction
Tough Fiber

Fiber Selection Guide

Model
Choose by shape/application
How to read Model No
Earlier models comparison table

Fibers

Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions


Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers


FX-500 series
FX-100 series

INDEX

Taking fiber sensors to the next level

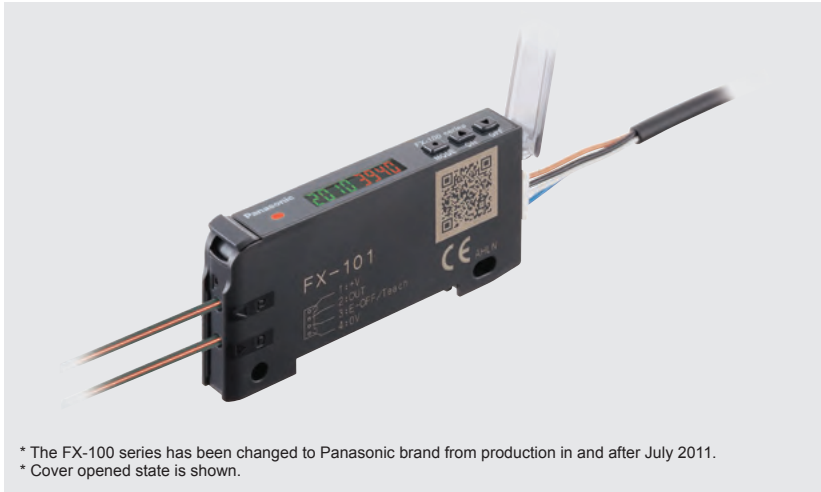

* The FX-100 series has been changed to Panasonic brand from production in and after July 2011.
* Cover opened state is shown.

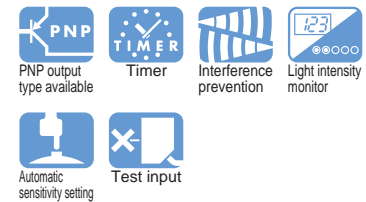

Good dual digital display

The threshold value and incident light intensity can be both confirmed at the same time, bringing good operability when making changes of each setting.




Commercially-available connectors reduce lead time and spare part numbers

Compatible with commercially-available connectors, so that processing costs and lead time required for processing after purchase can be greatly reduced. The connection parts same as the DP-100 series digital pressure sensors and the PM-64 series micro photoelectric sensors can be commonly used.



Commercially-available crimping connectors are used, so that the processing costs for connection cables can be greatly reduced.

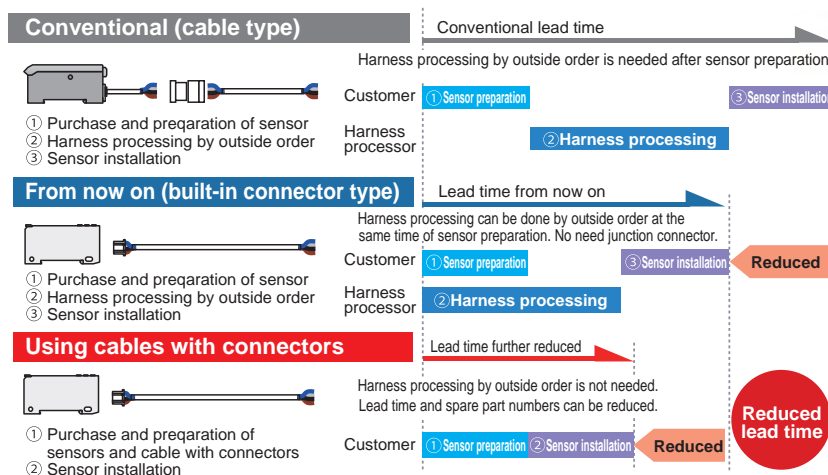


Saving-space with a width of 9 mm 0.354 in

Very slim body at only 9 mm 0.354 in. This is much thinner than existing fiber sensors. This makes a very large difference when using many units, even if the difference of one unit is small.




Improved stability over long terms

Utilizes "Four-chemical emitting element" for light emission. The light emission is guaranteed to be stable over long periods of time.

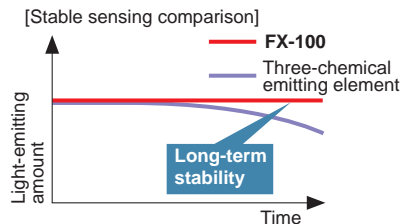

Simple operation due to clear configuration system

Continued to use the configuration system of digital pressure sensor DP-100 series, which has received high popularity since its release. We have separated the settings into three levels: RUN mode, SET mode, and PRO mode, making operation simpler and easier.

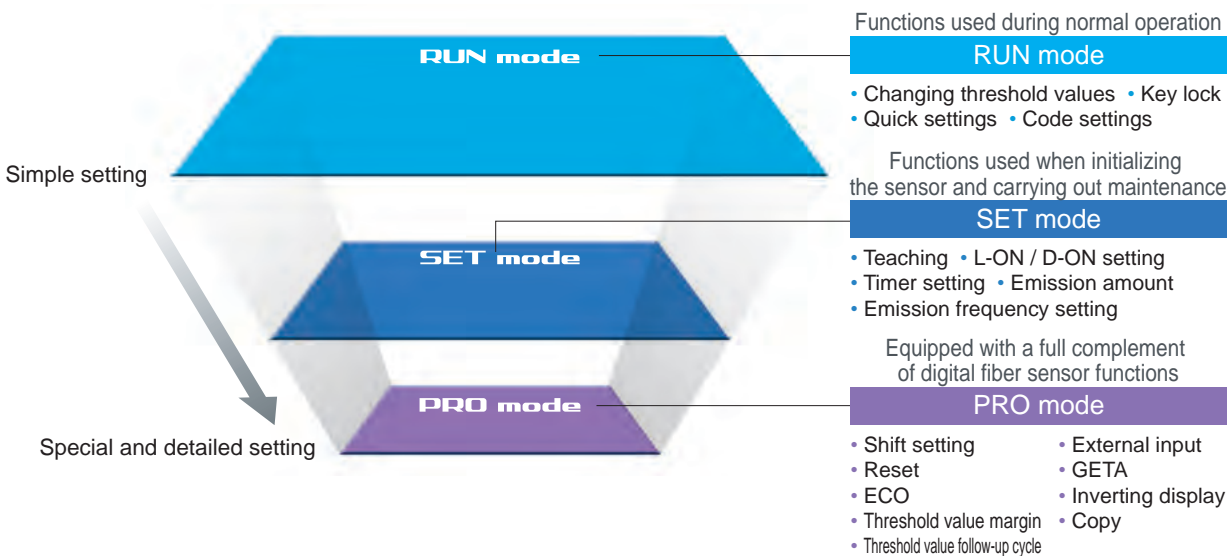

Quick code input function

RUN mode

Simply inputting the default setting "code (number)" will enable sensor settings. Even if the settings are accidentally changed, inputting the code will restore the default settings.

Confirmation can be carried out smoothly via telephone by simply quoting numbers. This can be of great assistance when dealing with foreign country customers.



Quick setting: Press **▲** and **▼** simultaneously for 2 sec.

Code setting: Press **▲** and **▼** simultaneously for 4 sec.

Quick setting numbers (abstract)

| No | Output operation | Timer | Emission amount setting |
|------|------------------|-----------------|-------------------------|
| -00- | Dark-ON | None | OFF |
| -01- | Dark-ON | None | ON |
| -02- | Dark-ON | OFF-delay 10 ms | OFF |
| -03- | Dark-ON | OFF-delay 10 ms | ON |
| -10- | Light-ON | ON-delay 40 ms | ON |
| -11- | Light-ON | ON-delay 40 ms | OFF |
| -12- | Light-ON | ON-delay 10 ms | ON |
| -13- | Light-ON | ON-delay 10 ms | OFF |

Refer to "Quick setting function" and "Code setting function" in "PRECAUTIONS FOR PROPER USE" for details.

New product introduction
Tough Fiber

Fiber Selection Guide
Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers
Super Quality
Threaded Type
Square Head Type
Cylindrical Type
Sleeve
Flat Type
Small Spot
Narrow Beam
Wide Beam
Convergent Reflective Type
Retroreflective Type
Chemical / Oil-resistant
Heat-resistant
Vacuum-resistant
Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions
Thru-beam Type
Retroreflective Type
Reflective Type
Others

Amplifiers
FX-500 series
FX-100 series


INDEX

Teaching with ON / OFF keys SET mode


Simply press the ON key when an object is present, and OFF when it is not, and teaching is completed. There is no need to consider difference between Light-ON and Dark-ON.

<Setting example>

Thru-beam type / Retroreflective type

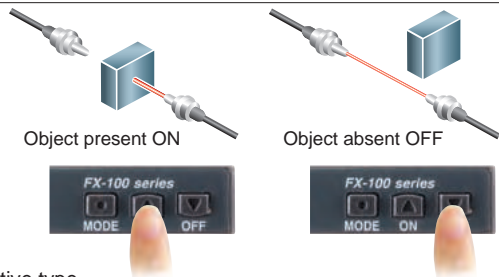

Reflective type

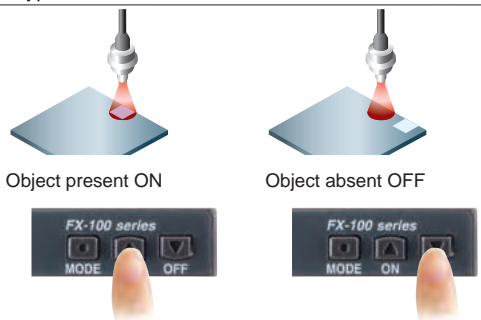


Teaching even without an object — Limit teaching function

Threshold value can be set by performing teaching only when an object is absent (when the incident light amount is stable). This is useful when there are other objects in the background also when detecting a minute objects. Teaching can also be carried out using external input.

Threshold value follow-up cycle setting function PRO mode

This function performs automatic setting to threshold value by checking the incident light intensity at desired intervals in order to follow the changes in the light amount resulting from changes in the environment over long periods (such as dust). Contributes to reduction in maintenance hours.

* Effective when the output operation is set to Dark-ON, and when using thru-beam type or retroreflective type fibers.



Resolves variation in incident light intensity display GETA function PRO mode

Even when performing the same sensing operation, there may be variances in the digital values of the fiber amp. There is no problem with the sensor itself, but the operator may find it troubling.

Given value can be corrected with the GETA function, so the apparent variation can be eliminated and the creation of operation manuals can proceed smoothly.


Variations in the amount of light received



Unify at 500 using the GETA function




Example of current incident light intensity display of '500' is adjusted to '1000'

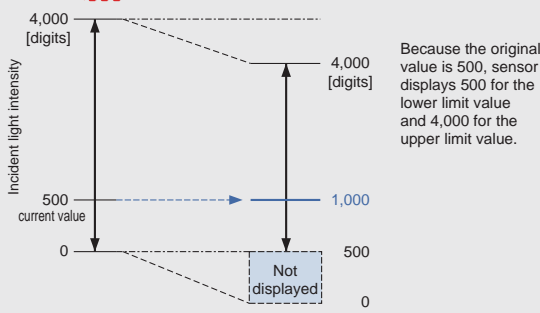

Emission amount setting function SET mode

Emission amount can be reduced in order to achieve stable detection when the receiving light level is saturated, such as detection at close range and detection of transparent or minute objects. Previously, the emission amount level was only one, but from production in December 2007, four level setting (three level + auto setting) has become available. This function brings easier settings than before.


【Light receiving level saturated】

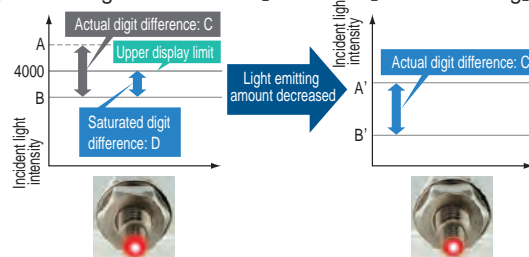

Emission frequency setting mode SET mode

Mutual interference is prevented for max. 3 units for standard type **FX-101** and max. 4 units in case of long sensing range type **FX-102**. During setting of interference prevention, emitter and output indicator both flash, so it is convenient to confirm which fiber is in the setting process at a glance. Emitter flashes even when an amplifier is not installed close together.


* When the emission frequency is changed, a response time is also changed.

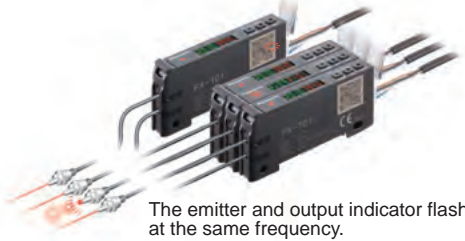

External input setting mode PRO mode


External input can be selected from emission halt, limit teaching / full-auto teaching / 2-level teaching, ECO or emission amount test. Threshold value set at each teaching is also memorized.

* 2-level teaching, emission amount test and threshold value storing setting are available in amplifiers manufactured after December 2007.

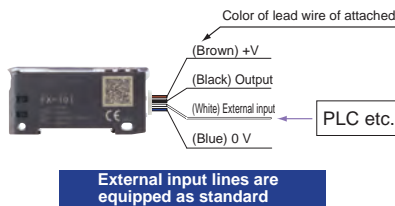

Digital display inversion setting PRO mode


The viewing orientation of the digital display can be inverted in accordance with the setting direction of the amplifier.

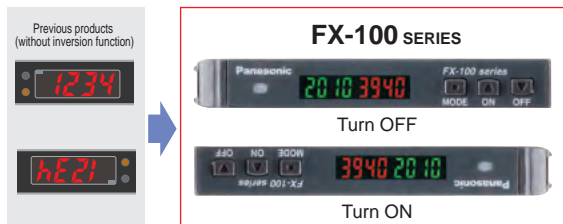

Alert function PRO mode

When the amount light received approaches the threshold value, the display can be made to blink in order to alert the operator.

<When using at a shift amount of 20% and a threshold value of 1,000>
The amount of light received ranges from about 900 to 1,100 when the digital indicator flashes.

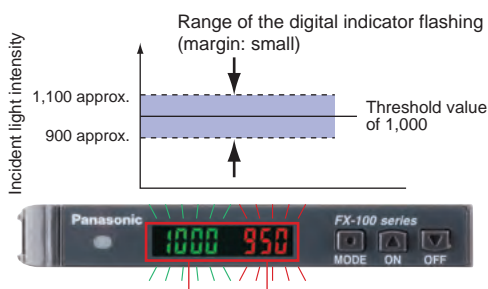


Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com

Setting copy function to reduce man-hours and human error PRO mode

By connecting a fiber sensor to the master fiber sensor, the master sensor settings can be copied along with data communications. When the same settings are input to several units, trouble from setting errors can be prevented, also changes to the work order will be small when equipment design is changed.

<Wiring to copy settings>

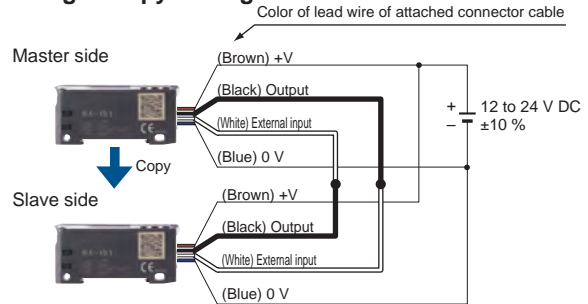

These settings can be copied

Threshold value, output operation, timer operation, timer emission amount, shift, external input, threshold value-storing, ECO inverting digital display, and threshold value margin

Without mounting bracket

Selectable either mounting on DIN rail or direct mounting with through hole. Direct mounting brings stability even on a movable parts or installation of a single unit.



Available from standard type or long sensing range type

Standard type and long sensing range type are available which has various response time and sensing range. The model best meet application needs can be selected.

| Model No. | Type | Sensing range (FT-B8) | Response time |
|---------------|-------------------------|-----------------------|---------------|
| FX-101 | Standard type | 400 mm 15.748 in | Max. 250 μs |
| FX-102 | Long sensing range type | 1,150 mm 45.276 in | Max. 2.5 ms |

Power consumption saving with ECO mode

When there is no key operations in approximately 20 seconds, digital display turns off and power consumption can be reduced to 600mW or less (720mW in normal mode).



New product introduction
Tough Fiber

Fiber Selection Guide

Model
Choose by shape/application
How to read Model No.
Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers


FX-500 series

FX-100 series

INDEX

ORDER GUIDE

Amplifiers

| Type | Appearance | Model No. | Emitting element | Output | |
|---------------------------|---|---------------------------|------------------|-------------------------------|---|
| Standard type |  | FX-101 (Note 2) | Red LED | NPN open-collector transistor | |
| | | FX-101-Z (Note 3) | | NPN open-collector transistor | |
| | | FX-101P (Note 2) | | PNP open-collector transistor | |
| M8 plug-in connector type | | FX-101P-Z (Note 3) | | PNP open-collector transistor | |
| | | Cable set (Note 1) | | FX-101-CC2 | NPN open-collector transistor |
| | | | | FX-101P-CC2 | PNP open-collector collector transistor |
| FX-102 (Note 2) | | | | NPN open-collector transistor | |
| Long sensing range type | | FX-102-Z (Note 3) | | NPN open-collector transistor | |
| | | M8 plug-in connector type | | FX-102P (Note 2) | PNP open-collector transistor |
| | Cable set (Note 1) | | | FX-102P-Z (Note 3) | PNP open-collector transistor |
| | | | | FX-102-CC2 | NPN open-collector transistor |
| | | FX-102P-CC2 | | PNP open-collector transistor | |

Notes: 1) The connector attached cable 2 m **CN-14A-C2** is supplied with the amplifier.

2) Make sure to use the optional connector attached cable **CN-14A(-R)-C□** or the connector **CN-14A**, or a connector manufactured by J.S.T. Mfg. Co., Ltd. (contact: SPHD-001T-P0.5, housing: PAP-04V-S)

3) Make sure to use the optional M8 connector attached cable **CN-24A-C□**.

Accessory

• CN-14A-C2


(Connector attached cable 2 m 6.562 ft)

* Only include cable set type



• FC-FX-1 (Protection cover)

* It has been attached from the production at July, 2011.




OPTIONS

| Designation | Model No. | Description | |
|--|-------------------------|--|--|
| Connector attached cable | CN-14A-C1 | 1 m 3.281 ft | 0.2 mm ² 4-core cabyre cable with connector on one end Cable outer diameter: ø3.7 mm ø0.146 in |
| | CN-14A-C2 (Note) | 2 m 6.562 ft | |
| | CN-14A-C3 | 3 m 9.843 ft | |
| | CN-14A-C5 | 5 m 16.404 ft | |
| Connector attached cable (Flexible type) | CN-14A-R-C1 | 1 m 3.281 ft | |
| | CN-14A-R-C2 | 2 m 6.562 ft | |
| | CN-14A-R-C3 | 3 m 9.843 ft | |
| | CN-14A-R-C5 | 5 m 16.404 ft | |
| M8 connector attached cable | CN-24A-C2 | 2 m 6.562 ft | For M8 plug-in connector type The connector on one end Cable outer diameter: ø4 mm ø0.157 in |
| | CN-24A-C5 | 5 m 16.404 ft | |
| Connector | CN-14A | Set of 10 housings and 40 contacts | |
| Amplifier mounting bracket | MS-DIN-4 | Mounting bracket for amplifier | |
| End plates | MS-DIN-E | When it moves depending on the way it is installed on a DIN rail, these end plates ensure that all amplifiers are mounted together in a secure and fully connected manner. | |
| | | Two pcs. per set | |

Note: The connector attached cable **CN-14A-C2** is supplied with the cable set type **FX-10□-CC2**.


M8 connector attached cable

• CN-24A-C□




Amplifier mounting bracket

• MS-DIN-4




Connector attached cable

• CN-14A(-R)-C□



Connector

• CN-14A



Recommended connector

Contact: SPHD-001T-P0.5, Housing: PAP-04V-S (Manufactured by J.S.T. Mfg. Co., Ltd.)

Note: Contact the manufacturer for details of the recommended products.

Recommended crimping tool

Model No.: YC-610R (Manufactured by J.S.T. Mfg. Co., Ltd.)

Note: Contact the manufacturer for details of the recommended products.

SPECIFICATIONS

| Item | Model No. | Type | Standard type | | Long sensing range type | |
|--------------------------------------|--------------------------|------------|--|--|---|--|
| | | | | Cable set | | Cable set |
| | | NPN output | FX-101(-Z) (Note 5) | FX-101-CC2 | FX-102(-Z) (Note 5) | FX-102-CC2 |
| | | PNP output | FX-101P(-Z) (Note 5) | FX-101P-CC2 | FX-102P(-Z) (Note 5) | FX-102P-CC2 |
| Supply voltage | | | 12 to 24 V DC $\pm 10\%$ Ripple P-P 10% or less | | | |
| Power consumption | | | Normal operation: 720 mW or less (Current consumption 30 mA or less at 24 V supply voltage) ECO mode: 600 mW or less (Current consumption 25 mA or less at 24 V supply voltage) | | | |
| Output | | | <NPN output type> NPN open-collector transistor <ul style="list-style-type: none"> • Maximum sink current: 100 mA • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 1.5 V or less (at 100 mA sink current) | | <PNP output type> PNP open-collector transistor <ul style="list-style-type: none"> • Maximum source current: 100 mA • Applied voltage: 30 V DC or less (between output and +V) • Residual voltage: 1.5 V or less (at 100 mA source current) | |
| Output operation | | | Selectable either Light-ON or Dark-ON, at SET mode | | | |
| Short-circuit protection | | | Incorporated | | | |
| External input | | | <NPN output type> NPN non-contact input <ul style="list-style-type: none"> • Signal condition High: +8 V to +V DC or Open Low: 0 to +2 V DC (Source current 0.5 mA or less) • Input impedance: 10 kΩ approx. | | <PNP output type> PNP non-contact input <ul style="list-style-type: none"> • Signal condition High: +4 V to +V DC (Sink current 0.5 to 3 mA) Low: 0 to +0.6 V DC or Open • Input impedance: 10 kΩ approx. | |
| Response time | | | Emission frequency 0: 250 μ s or less (factory default setting) Emission frequency 1: 450 μ s or less Emission frequency 2: 500 μ s or less Emission frequency 3: 600 μ s or less | | Emission frequency 1: 2.5 ms or less (factory default setting) Emission frequency 2: 2.8 ms or less Emission frequency 3: 3.2 ms or less Emission frequency 4: 5.0 ms or less | |
| Sensitivity setting | | | 2-point teaching / Limit teaching / Full-auto teaching | | | |
| Operation indicator | | | Orange LED (lights up when the output is ON) | | | |
| Digital display | | | 4 digits (green) + 4 digits (red) LCD display | | | |
| Fine sensitivity adjustment function | | | Incorporated | | | |
| Timer function | | | ON-delay / OFF-delay timer, switchable either effective or ineffective [Timer period: 1 ms, 5 ms, 10 ms, 20 ms, 40 ms, 50 ms, 100 ms, 500 ms, 1,000 ms] | | | |
| Emission amount setting function | | | 3-level + Auto setting (from production in December 2007) | | | |
| Interference prevention function | | | Incorporated Emission frequency selection method (Note 2) (Functions at emission frequency 1, 2 or 3) | | Incorporated Emission frequency selection method (Note 2) (Functions at emission frequency 1, 2, 3 or 4) | |
| Environmental resistance | Ambient temperature | | -10 to +55 °C +14 to +131 °F (If 4 to 7 units are mounted close together: -10 to +50 °C +14 to +122 °F, if 8 to 16 units are mounted close together: -10 to +45 °C +14 to +113 °F) (No dew condensation or icing allowed), Storage: -20 to +70 °C -4 to +158 °F | | | |
| | Ambient humidity | | 35 to 85 % RH, Storage: 35 to 85 % RH | | | |
| | Ambient illuminance | | Incandescent light: 3,000 lx at the light-receiving face | | | |
| | Voltage withstandability | | 1,000 V AC for one min. between all supply terminals connected together and enclosure (Note 3) | | | |
| | Insulation resistance | | 20 M Ω , or more, with 250 V DC megger between all supply terminals connected together and enclosure (Note 3) | | | |
| | Vibration resistance | | 10 to 150 Hz frequency, 0.75 mm 0.030 in amplitude in X, Y and Z directions for two hours each | | | |
| | Shock resistance | | 98 m/s ² acceleration (10 G approx.) in X, Y and Z directions for five times each | | | |
| Emitting element (modulated) | | | Red LED (Peak emission wavelength: 643 nm 0.025 mil) | | | |
| Material | | | Enclosure: Polycarbonate, Key switch: Polycarbonate, Fiber lock lever: PBT | | | |
| Connecting method | | | Connector (Note 4) | | | |
| Cable length | | | Total length up to 100 m 328.084 ft is possible with 0.3 mm ² , or more, cable. | | | |
| Weight | | | Net weight: 15 g approx. Gross weight: 35 g approx. | Net weight: 15 g approx. Gross weight: 75 g approx. | Net weight: 15 g approx. Gross weight: 35 g approx. | Net weight: 15 g approx. Gross weight: 75 g approx. |
| Accessory | | | FC-FX-1 (Protection cover): 1 pc. (Note 6) | FC-FX-1 (Protection cover): 1 pc. (Note 6) CN-14A-C2 (Connector attached cable, 2 m 6.562 ft long): 1 pc. | FC-FX-1 (Protection cover): 1 pc. (Note 6) | FC-FX-1 (Protection cover): 1 pc. (Note 6) CN-14A-C2 (Connector attached cable, 2 m 6.562 ft long): 1 pc. |

Notes: 1) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +23 °C +73.4 °F.

2) When using the interference prevention function, set the emission frequencies for the amplifiers to be covered by the interference prevention function to different frequency values.

However, the interference prevention function does not operate at emission frequency 0 (factory default setting) for the **FX-101(P)(-Z)** / **FX-101(P)-CC2**.

3) The voltage withstandability and the insulation resistance values given in the above table are for the amplifier only.

4) Connector attached cable **CN-14A-C2** is not attached to the models that have no "-CC2" at the end of the model Nos.

Make sure to use the optional connector attached cable **CN-14A(-R)-C** or the connector **CN-14A**, or a connector manufactured by J.S.T. Mfg., Ltd. (contact: SPHD-001T-P0.5, housing: PAP-04V-S).

5) Model Nos. having the suffix "-Z" are M8 plug-in connector type. Make sure to use the optional M8 attached connector cable **CN-24A-C**.

6) Protection cover **FC-FX-1** has been attached from production in July, 2011.

New product introduction
Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No.

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers

FX-500 series

FX-100 series


INDEX

I/O CIRCUIT AND WIRING DIAGRAMS

FX-10□(-Z/-CC2)


NPN output type

I/O circuit diagram

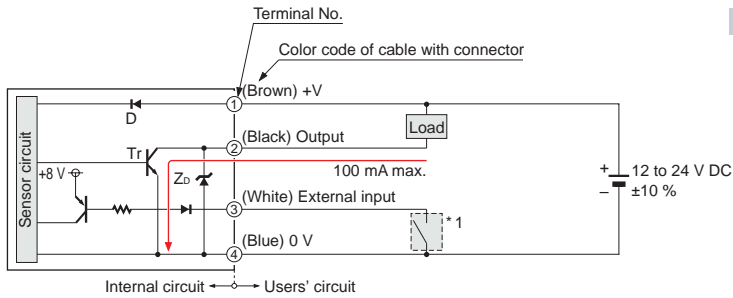


Terminal arrangement diagram

Connector type



| Terminal No. | Function |
|--------------|----------------|
| ① | +V |
| ② | Output |
| ③ | External input |
| ④ | 0 V |

M8 plug-in connector type



| Terminal No. | Function |
|--------------|----------------|
| ① | +V |
| ② | Output |
| ③ | External input |
| ④ | 0 V |

Symbols ... D : Reverse supply polarity protection diode
 Z_D: Surge absorption zener diode
 Tr : NPN output transistor

* 1


Non-voltage contact or NPN open-collector transistor

High (+8 V to +V DC, or open): Ineffective
 Low [0 to +2 V DC (source current 0.5 mA or less)]: Effective

FX-10□P(-Z/-CC2)


PNP output type

I/O circuit diagram

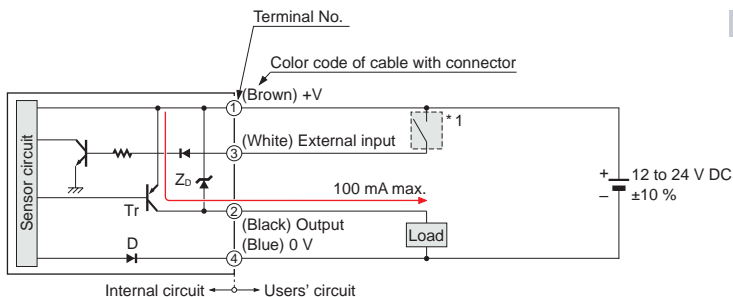


Terminal arrangement diagram

Connector type



| Terminal No. | Function |
|--------------|----------------|
| ① | +V |
| ② | Output |
| ③ | External input |
| ④ | 0 V |

M8 plug-in connector type



| Terminal No. | Function |
|--------------|----------------|
| ① | +V |
| ② | Output |
| ③ | External input |
| ④ | 0 V |

Symbols ... D : Reverse supply polarity protection diode
 Z_D: Surge absorption zener diode
 Tr : PNP output transistor


* 1

Non-voltage contact or PNP open-collector transistor


High [+4 V to +V DC (sink current 0.5 to 3 mA)]: Effective
 Low (0 to +0.6 V DC, or open): Ineffective

SENSING CHARACTERISTICS (TYPICAL)


FT-31S Thru-beam type

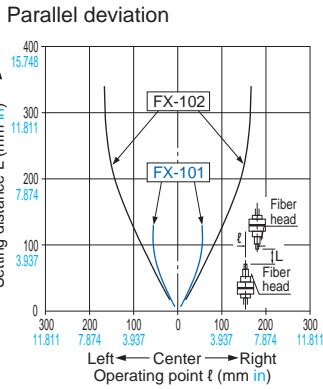


FT-31W Thru-beam type

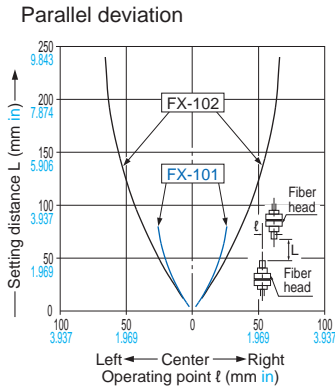


FT-42S Thru-beam type

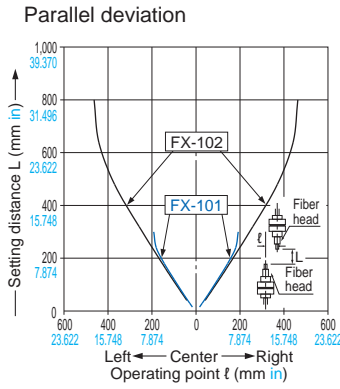


FT-42W Thru-beam type

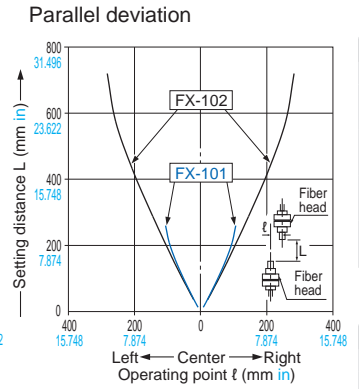


FT-43 Thru-beam type

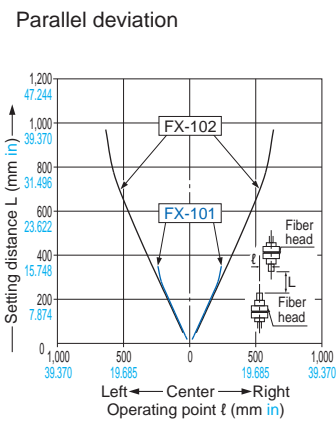


FT-45X Thru-beam type

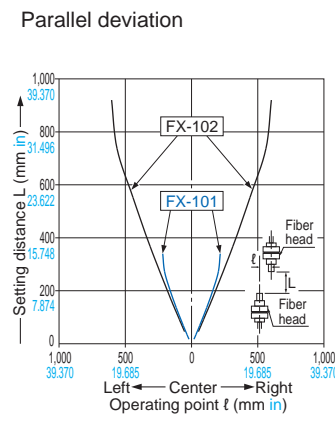


FT-A11 Thru-beam type

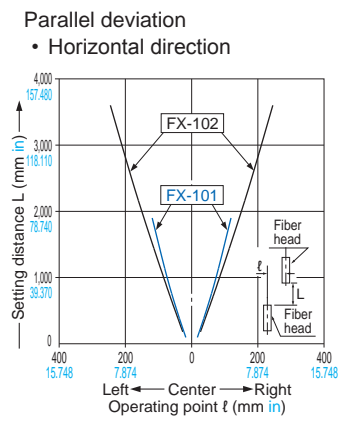


FT-A11 Thru-beam type

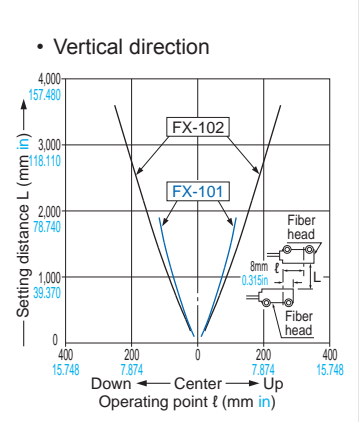


FT-S21W Thru-beam type

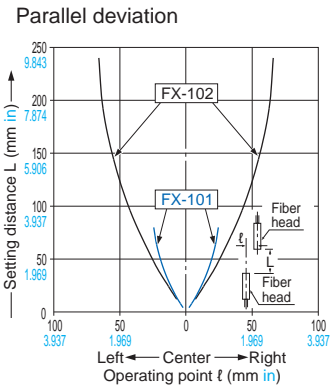


FT-S31W Thru-beam type

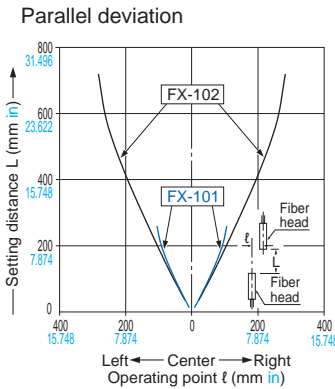


FD-32G Reflective type

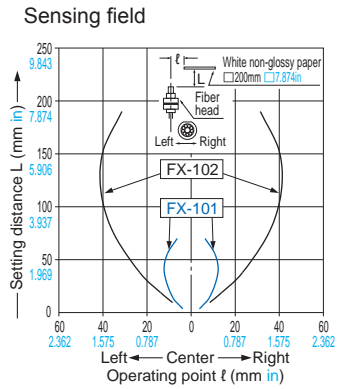


FD-32GX Reflective type

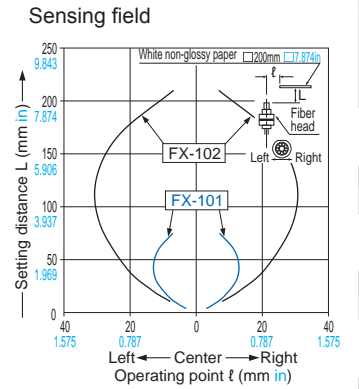


FD-41S Reflective type

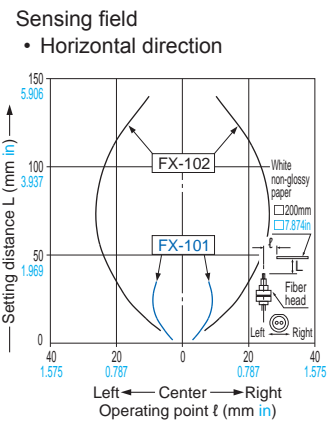

FD-41W Reflective type

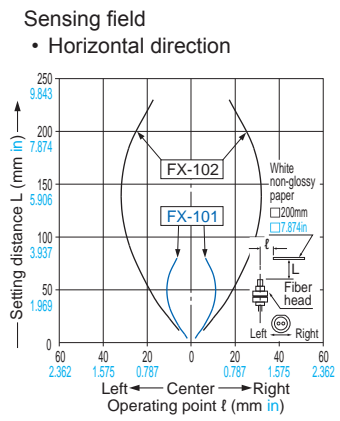

FD-41W Reflective type

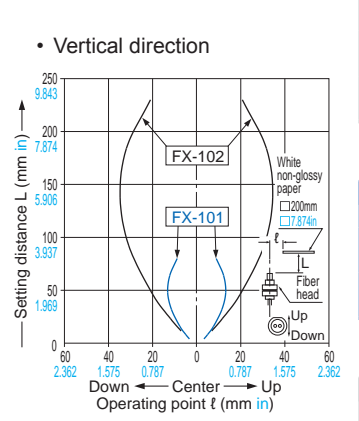

New product introduction

Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No.

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers

FX-500 series


FX-100 series

INDEX

SENSING CHARACTERISTICS (TYPICAL)


FD-42G Reflective type

Sensing field

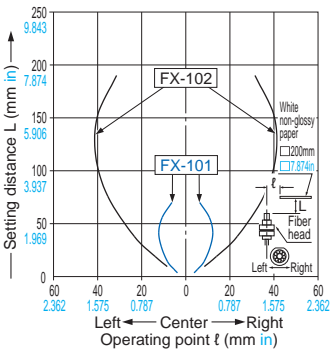


FD-42GW Reflective type

Sensing field

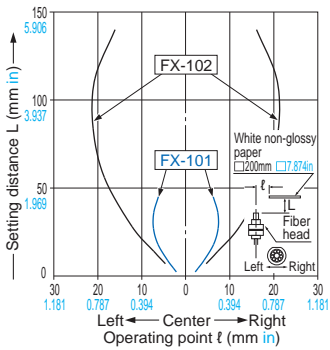

FD-61G Reflective type


Sensing field

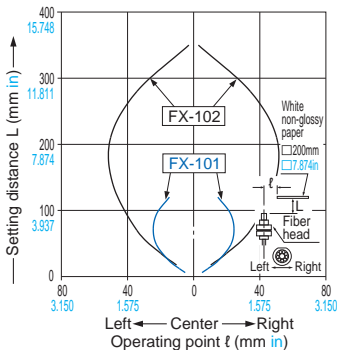

FD-61W Reflective type

Sensing field


• Horizontal direction

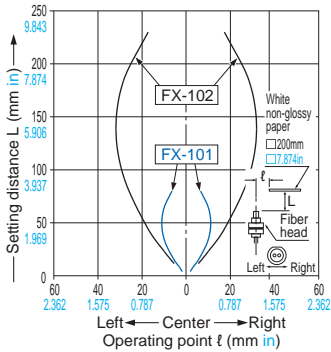


FD-62 Reflective type

Sensing field


• Horizontal direction

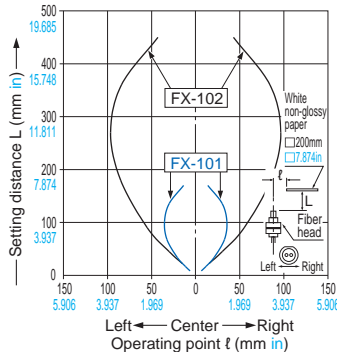

• Vertical direction

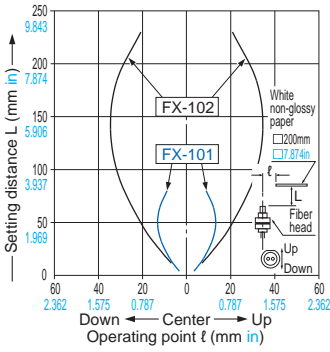


• Vertical direction

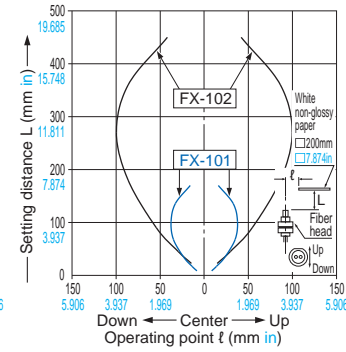


FD-64X Reflective type

Sensing field

• Horizontal direction

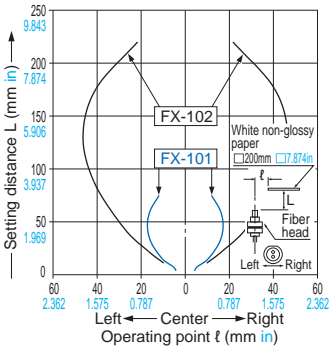


• Vertical direction

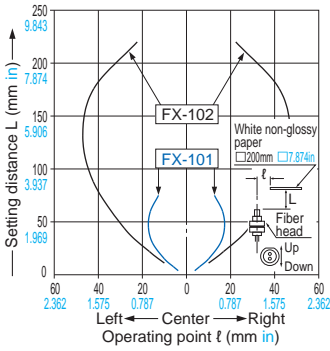


FD-S32W Reflective type

Sensing field

• Horizontal direction

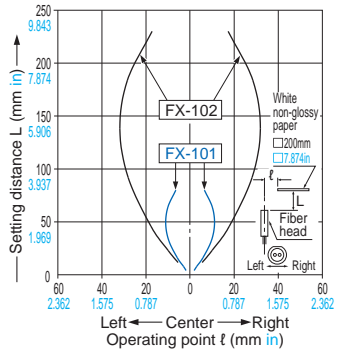


• Vertical direction

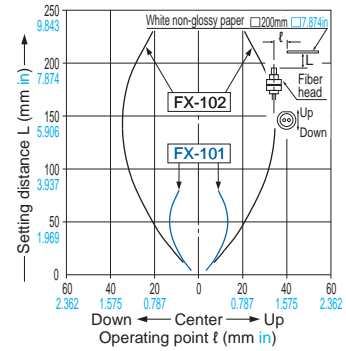

FD-S33GW Reflective type

Sensing field



PRECAUTIONS FOR PROPER USE



- Never use this product as a sensing device for personnel protection.
- In case of using sensing devices for personnel protection, use products which meet laws and standards, such as OSHA, ANSI or IEC etc., for personnel protection applicable in each region or country.

Using in combination with the FX-300 / FX-410 series


- The **FX-100** series does not use the horizontal connectors that are used with the **FX-300 / FX-410** series. Please note that horizontal connection cannot be performed using a connector attached cable. In addition, the optical communication function is not equipped on the **FX-100** series, so it is unable to perform interference prevention for use with the **FX-300 / FX-410** series. If using the **FX-100** series together with the **FX-300 / FX-410** series side-by-side, please set the same models together in groups.

Mounting

<When using a DIN rail>


How to mount the amplifier

- ① Fit the rear part of the mounting section of the amplifier on a 35 mm **1.378 in** width DIN rail.
- ② Press down the rear part of the mounting section of the unit on the 35 mm **1.378 in** width DIN rail and fit the front part of the mounting section to the DIN rail.



How to remove the amplifier


- ① Push the amplifier forward.
- ② Lift up the front part of the amplifier to remove it.



Note: Take care that if the front part is lifted without pushing the amplifier forward, the hook on the rear portion of the mounting section is likely to break.

<When using screws with washers>

- Use M3 screws with washers for mounting. The tightening torque should be 0.5 N·m or less.




Refer to the "Operation Guide" on our website for details pertaining to operating instructions for the amplifier.

Wiring

- Make sure that the power supply is OFF while adding or removing the amplifiers.
- Note that if a voltage exceeding the rated range is applied, or if an AC power supply is directly connected, the product may get burnt or damaged.
- Note that short-circuit of the load or wrong wiring may burn or damage the product.
- Do not run the wires together with high-voltage lines or power lines, or put them in the same raceway. This can cause malfunction due to induction.
- Verify that the supply voltage variation is within the rating.
- If power is supplied from a commercial switching regulator, ensure that the frame ground (F.G.) terminal of the power supply is connected to an actual ground.
- In case noise generating equipment (switching regulator, inverter motor, etc.) is used in the vicinity of this product, connect the frame ground (F.G.) terminal of the equipment to an actual ground.
- Make sure to use the quick-connection cable (optional) for the connection of the controller. Extension up to total 100 m **328.084 ft** is possible with 0.3 mm² or more, cable. However, in order to reduce noise, make the wiring as short as possible.

Part description

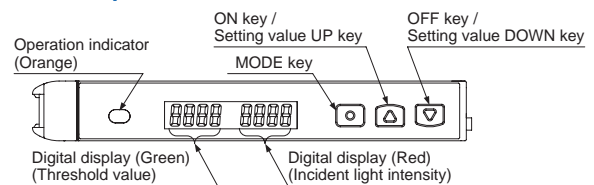

Setting mode

- Setting mode appears after the MODE key is pressed for 2 sec. in RUN mode.

| Setting item | Factory setting | Description |
|----------------------------|--|--|
| Teaching mode | LRch | Threshold value can be set in 2-point teaching, limit teaching, or full-auto teaching. |
| Output operation setting | L_d d_on [Dark-ON] | Light-ON or Dark-ON can be set. |
| Timer operation setting | dELY non [Without timer] | Without timer, ON delay timer, or OFF delay timer can be set. |
| Timer delays setting | ond 10 [ON-delay timer: 10 ms] ofd 10 [OFF-delay timer: 10 ms] | When setting ON delay timer or OFF delay timer in the timer operation setting mode, timer delays can be set. • When timer is not set, this mode is not displayed. |
| Emission amount setting | PctL IIII * [Level 3] | In case incident light intensity is saturated, emission amount can be reduced. |
| Emission frequency setting | FX-101□ FrE9 F-0 [0 (Response time: 250 μs or less)] FX-102□ FrE9 F-0.1 [1 (Response time: 2.5 ms or less)] | When using the fiber heads in parallel, interference can be prevented by setting different emission frequency. However, when emission frequency 0 is set, interference cannot be prevented. Response time corresponds to emission frequency. |

* Indicated as "PctL off" before production in November 2007.

New product introduction
Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No.

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers

FX-500 series

FX-100 series

INDEX

PRECAUTIONS FOR PROPER USE

PRO mode

- PRO mode appears after the MODE key is pressed for 4 sec. in RUN mode.

| Setting item | Factory setting | Description |
|--|--------------------|--|
| Shift setting | (Shift amount 15%) | Shift amount can be selected from 0 to 80 % in the limit teaching. Select 0 % when it is desired to set the present incident light intensity as a threshold value. |
| External input setting | (Emission halt) | External input can be selected from emission halt, limit teaching [+], limit teaching [-], full-auto teaching, ECO (Note 1), 2-point teaching or emission amount test. When setting the incident light intensity test "ESt", output turns ON / OFF every 100ms when the rate of incident light intensity and threshold value is less than half of the set shift amount (for example, when the rate of incident light intensity and threshold value is within ± 10 % for 20 % of shift amount) at external input. |
| Threshold value-storing setting mode (Note 2) | (OFF) | Threshold value set at the limit teaching, full-auto teaching or 2-point teaching by external input is stored. When selecting Auto in the emission amount setting mode, the set emission amount level is also stored. |
| Threshold value follow-up cycle setting (Note 3) | (OFF) | When incident light intensity exceeds threshold value, this mode can change the threshold value with each set cycle depending on variations of the incident light intensity. The follow-up shift amount is same as the one set in the shift setting mode. However, the threshold value is not stored. |
| GETA function setting (Note 4, 5) | (OFF) | Variations can be reduced by correcting the present incident light intensity in each amplifier to a target value. Target value to offset incident light intensity can be selected from 0 to 2,000 by 100 unit each. For example, if the target value is set to 2,000 when the incident light intensity is 1,500, the incident light intensity becomes 2,000. |
| ECO setting | (OFF) | It is possible to light up / turn off the digital display. When ECO setting mode is ON, the display turns off in 20 sec. approx. in RUN mode. To light up the display again, press any key for 2 sec. or more. |
| Digital display inversion setting | (OFF) | Digital display can be inverted. |
| Threshold value margin setting | (OFF) | Margin for threshold value to the present incident light intensity can be checked. When there is no margin, it is possible to make the digital display blink. off : Set to "OFF": does not function. Green : Green blinks. Red : Red blinks. Red and green : Red and green blink. In-t : When conducting limit teaching or 2-point teaching by external input, in case the rate of reference incident light intensity and threshold value after teaching is 200% or more, or in case it is less than half of the shift amount, output turns ON / OFF every 100 ms. (Note 6) |
| Setting copy | (NO) | The settings of the master side amplifier can be copied to the slave side amplifier. For details, refer to "Setting copy function". |
| Reset | (NO) | Returns to default settings (factory settings.) |

- Notes: 1) When ECO is selected at the external input setting mode, key operation on the main body is invalid during external input.
2) This mode is not indicated unless any of "LtcP", "Ltc-", "Auto" or "2-Pl" is set at the external input setting mode. (Incorporated from production in December 2007.)
3) If the incident light intensity becomes "300" or less, the follow-up operation stops. In that condition, threshold value [digital display (green)] blinks. This function can be used when thru-beam type or retroreflective type fiber is applied to this product. If reflective type fiber is applied, the function cannot be used depending on use conditions.
4) If MODE key is pressed in RUN mode when GETA function is used, the incident light intensity before setting GETA function is displayed on the red digital display for 2 sec. approx.
5) When GETA function is used in saturation of incident light intensity (4,000 or more,) "HARD" is indicated on the red digital display. Correction value is up to 4,000.
6) This mode does not operate unless any of "LtcP", "Ltc-" or "2-Pl" is set at the external input setting mode. (Incorporated from production in December 2007.)

Refer to the "Operation Guide" on our website for details pertaining to operating instructions for the amplifier.


Setting copy function

- This can copy the settings of the master side amplifier to the slave side amplifier.

- Be sure to use the setting copy function between the identical models (Between FX-101□ models or FX-102□ models). This function cannot be used between different models.
- Only one sensor can be connected on slave side with a master side sensor for the setting copy function.
- Threshold value, output operation setting, timer operation setting, timer setting, light-emitting amount setting, shift setting, external input setting, threshold value margin setting, ECO setting, digital display inversion setting, and threshold value margin setting can be copied.

<Setting procedures>

- Set the setting copy mode of the master side amplifier to "Copy sending ON", and press the MODE key so that "COPY" is shown on the digital display and the sensor is in copy ready state. For the setting method, refer to "Operation guide".
- Turn off the master side amplifier.
- Connect the master side amplifier with the slave side amplifier as shown below.

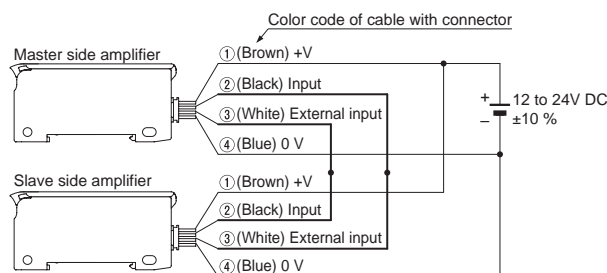

- Turn on the master side amplifier and the slave side amplifier at the same time. (Note)
- "COPY" is shown on the green digital display of the master side amplifier and 4-digit code is shown on the red digital display of it, then the copying starts. During copy communication, "COPY" is shown on the green digital display of the slave side amplifier, and the ongoing copy communication indicator ("!" → "!!" → "!!!" → "!!!!" → "!!!!!" → "!!!!!!" → "!!!!!!!") is displayed on the red digital display.
- When the copying is completed, "Good" is shown on the green digital display of the slave side amplifier, while the 4-digit code (the same code as the master side amplifier) is shown on the red digital display of it.
- Turn off the power of the master side amplifier and the slave side amplifier and disconnect the wire.

* If copying the settings to another amplifier repeatedly, follow the steps ③ to ⑦.

Note: Take care that if the power is not turned on at the same time, the setting contents may not be copied.

<To cancel the setting copy mode of the master side amplifier>

- While the slave side amplifier is disconnected, turn on the power of the master side amplifier.
- Press the MODE key for 2 sec. approx.

PRECAUTIONS FOR PROPER USE

Others

- Our products have been developed / produced for industrial use only.
- Do not use during the initial transient time (0.5 sec.) after the power supply is switched on.
- Take care that the product is not directly exposed to fluorescent lamp from a rapid-starter lamp, a high frequency lighting device or sunlight etc., as it may affect the sensing performance.
- This product is suitable for indoor use only.
- Avoid dust, dirt, and steam.
- Take care that the product does not come in contact with oil, grease, organic solvents, such as thinner, etc., strong acid or alkaline.
- This product cannot be used in an environment containing inflammable or explosive gases.
- Never disassemble or modify this product.
- EEPROM is adopted to this product. It is not possible to conduct teaching 100 thousand times or more, because of the EEPROM's lifetime.

Quick setting function

- The quick setting function makes it possible to set the content of the SET Mode (output operation, timer operation, amount of light emitted, and frequency of light emitted) simply by selecting a setting number.
- While in the RUN Mode, pressing and holding both the ON key (▲) and OFF key (▼) simultaneously for 2 seconds will switch to the quick setting function.


<Table of quick setting numbers>

| No. | Output operation | Timer | Emission amount setting (Note) |
|------|------------------|-----------|--------------------------------|
| -00- | D-ON | non | Level 3 (OFF) |
| -01- | D-ON | non | Level 2 (ON) |
| -02- | D-ON | ofd 10 ms | Level 3 (OFF) |
| -03- | D-ON | ofd 10 ms | Level 2 (ON) |
| -04- | D-ON | ofd 40 ms | Level 3 (OFF) |
| -05- | D-ON | ofd 40 ms | Level 2 (ON) |
| -06- | D-ON | ond 10 ms | Level 3 (OFF) |
| -07- | D-ON | ond 10 ms | Level 2 (ON) |
| -08- | D-ON | ond 40 ms | Level 3 (OFF) |
| -09- | D-ON | ond 40 ms | Level 2 (ON) |
| -10- | L-ON | ond 40 ms | Level 2 (ON) |
| -11- | L-ON | ond 40 ms | Level 3 (OFF) |
| -12- | L-ON | ond 10 ms | Level 2 (ON) |
| -13- | L-ON | ond 10 ms | Level 3 (OFF) |
| -14- | L-ON | ofd 40 ms | Level 2 (ON) |
| -15- | L-ON | ofd 40 ms | Level 3 (OFF) |
| -16- | L-ON | ofd 10 ms | Level 2 (ON) |
| -17- | L-ON | ofd 10 ms | Level 3 (OFF) |
| -18- | L-ON | non | Level 2 (ON) |
| -19- | L-ON | non | Level 3 (OFF) |

Note: Until production in November 2007, OFF or ON was selectable. The emission amount of Level 2 (ON) is about 40% of that of Level 3 (OFF).

Difference between previous model and upgraded one

- For upgraded ones (production in and after December 2007), "P" is marked near the beam-emitting inlet. Previous ones have no marking. Appearance and functions have been changed.

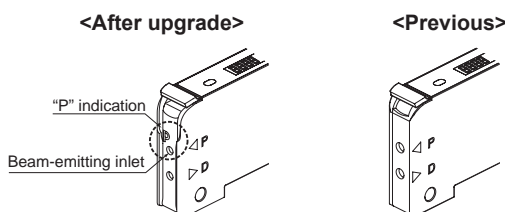

Refer to the "Operation Guide" on our website for details pertaining to operating instructions for the amplifier.

Code setting function

- The code setting function makes it possible to set the output operation, timer operation, amount of light emitted, frequency of light emitted, ECO setting, external input, and amount of shift by selecting a code of one's choice.
- While in the RUN Mode, pressing and holding both the ON key (▲) and OFF key (▼) simultaneously for 4 seconds will switch to the code setting function.

<Code table>

| Code | 1st digit | | 2nd digit | | ECO | External input | Shift (Note 1) | |
|------|------------------|----------------|----------------------------------|---------|-----|-------------------------------|----------------|-------------------------------|
| | Output operation | Timer (Note 1) | Emission amount setting (Note 2) | | | | | |
| | | | FX-101□ | FX-102□ | | | | |
| 0 | D-ON | non | 0 | 1 | OFF | Emission halt | 5 % | |
| 1 | | ond 10 ms | 1 | 2 | | Limit teaching [+] | 10 % | |
| 2 | | ond 40 ms | 2 | 3 | | Limit teaching [-] | 15 % | |
| 3 | | ofd 10 ms | 3 | 4 | | Full-auto teaching | 20 % | |
| 4 | | ofd 40 ms | 0 | 1 | | ECO | 25 % | |
| 5 | L-ON | non | 1 | 2 | ON | Emission halt | 30 % | |
| 6 | | ond 10 ms | 2 | 3 | | Limit teaching [+] | 35 % | |
| 7 | | ond 40 ms | 3 | 4 | | Limit teaching [-] | 40 % | |
| 8 | | ofd 10 ms | 0 | 1 | | Full-auto teaching | 45 % | |
| 9 | | ofd 40 ms | 1 | 2 | | ECO | 50 % | |
| A | Auto | | 2 | 3 | OFF | 2-point teaching | | |
| B | | | 3 | 4 | | Incident light intensity test | | |
| C | | | 0 | 1 | | ON | | 2-point teaching |
| D | | | 1 | 2 | | | | Incident light intensity test |
| E | 2 | 3 | | | | | | |
| F | 3 | 4 | | | | | | |

- Notes: 1) When the present setting is out of the code setting range, "-" is shown. When "-" is selected, the set content of the digit is not changed.
 2) Until production in November 2007, OFF or ON was selectable. The emission amount of Level 2 is about 40% of that of Level 3. The emission amount of Level 1 is about 20% of that of Level 3.
 3) The factory setting is "0002".

New product introduction

Tough Fiber

Fiber Selection Guide

Model

Choose by shape/application

How to read Model No.

Earlier models comparison table

Fibers

Super Quality

Threaded Type

Square Head Type

Cylindrical Type

Sleeve

Flat Type

Small Spot

Narrow Beam

Wide Beam

Convergent Reflective Type

Retroreflective Type

Chemical / Oil-resistant

Heat-resistant

Vacuum-resistant

Liquid Leak / Liquid Detection

Fiber Options

Semi-custom fibers

Fiber Dimensions

Thru-beam Type

Retroreflective Type

Reflective Type

Others

Amplifiers



FX-500 series

FX-100 series

INDEX



DIMENSIONS (Unit: mm in)

FX-101 □ FX-102 □ Amplifier

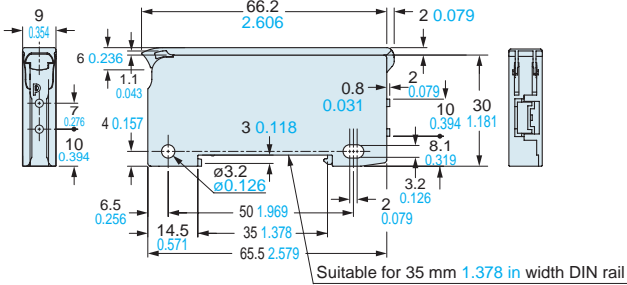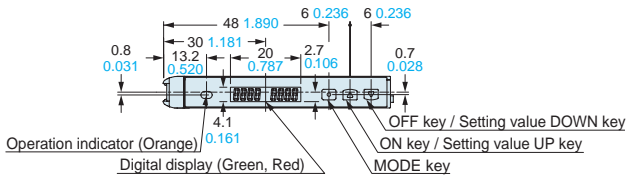


Note: The protection cover has been attached from the production at July, 2011.

FX-101(P)-Z FX-102(P)-Z Amplifier

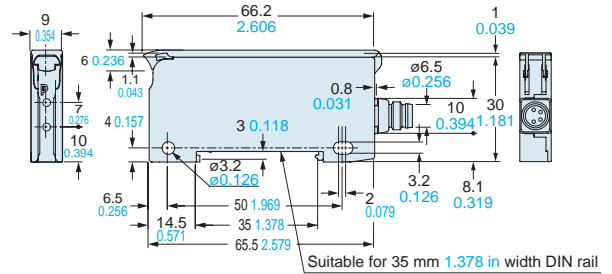
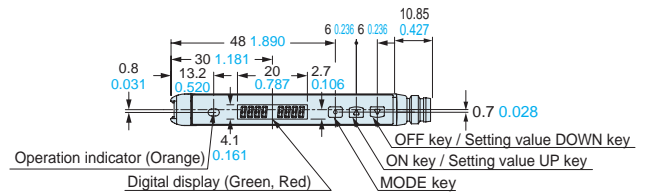


Note: The protection cover has been attached from the production at July, 2011.


MS-DIN-4 Amplifier mounting bracket (Optional)

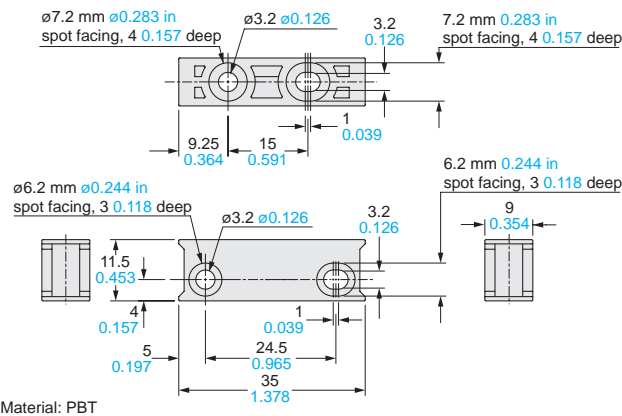

Previous dimensions (production before November 2007)

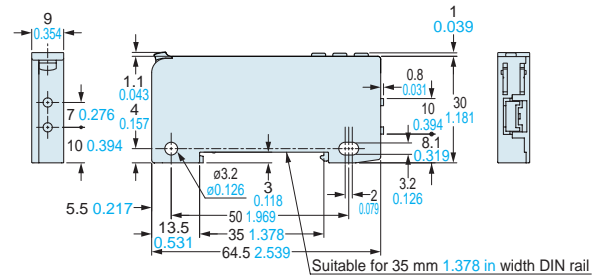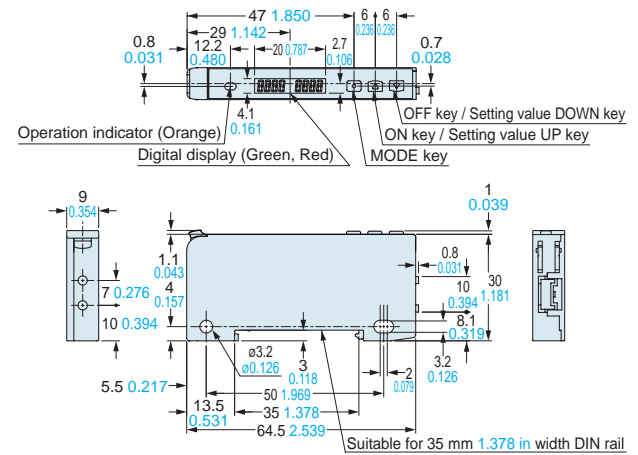


MS-DIN-E End plate (Optional)

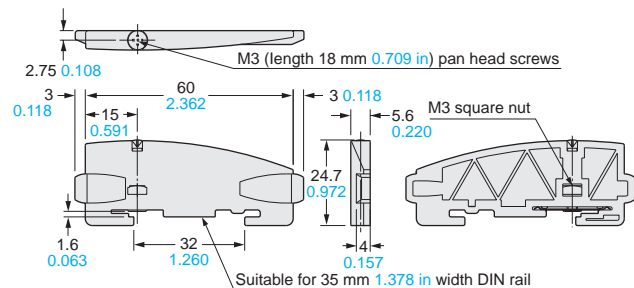

Material: Polycarbonate


CN-14A-C □ CN-14A-R-C □ Connector attached cable (Optional)

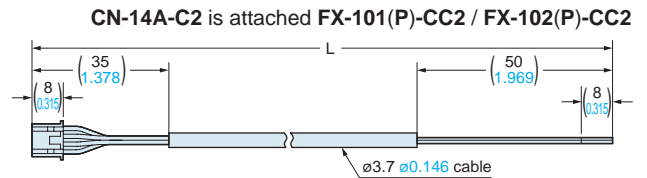

• Length L

| Model No. | Length L |
|---------------|---------------|
| CN-14A(-R)-C1 | 1,000 39.370 |
| CN-14A(-R)-C2 | 2,000 78.740 |
| CN-14A(-R)-C3 | 3,000 118.110 |
| CN-14A(-R)-C5 | 5,000 196.850 |

MEMO

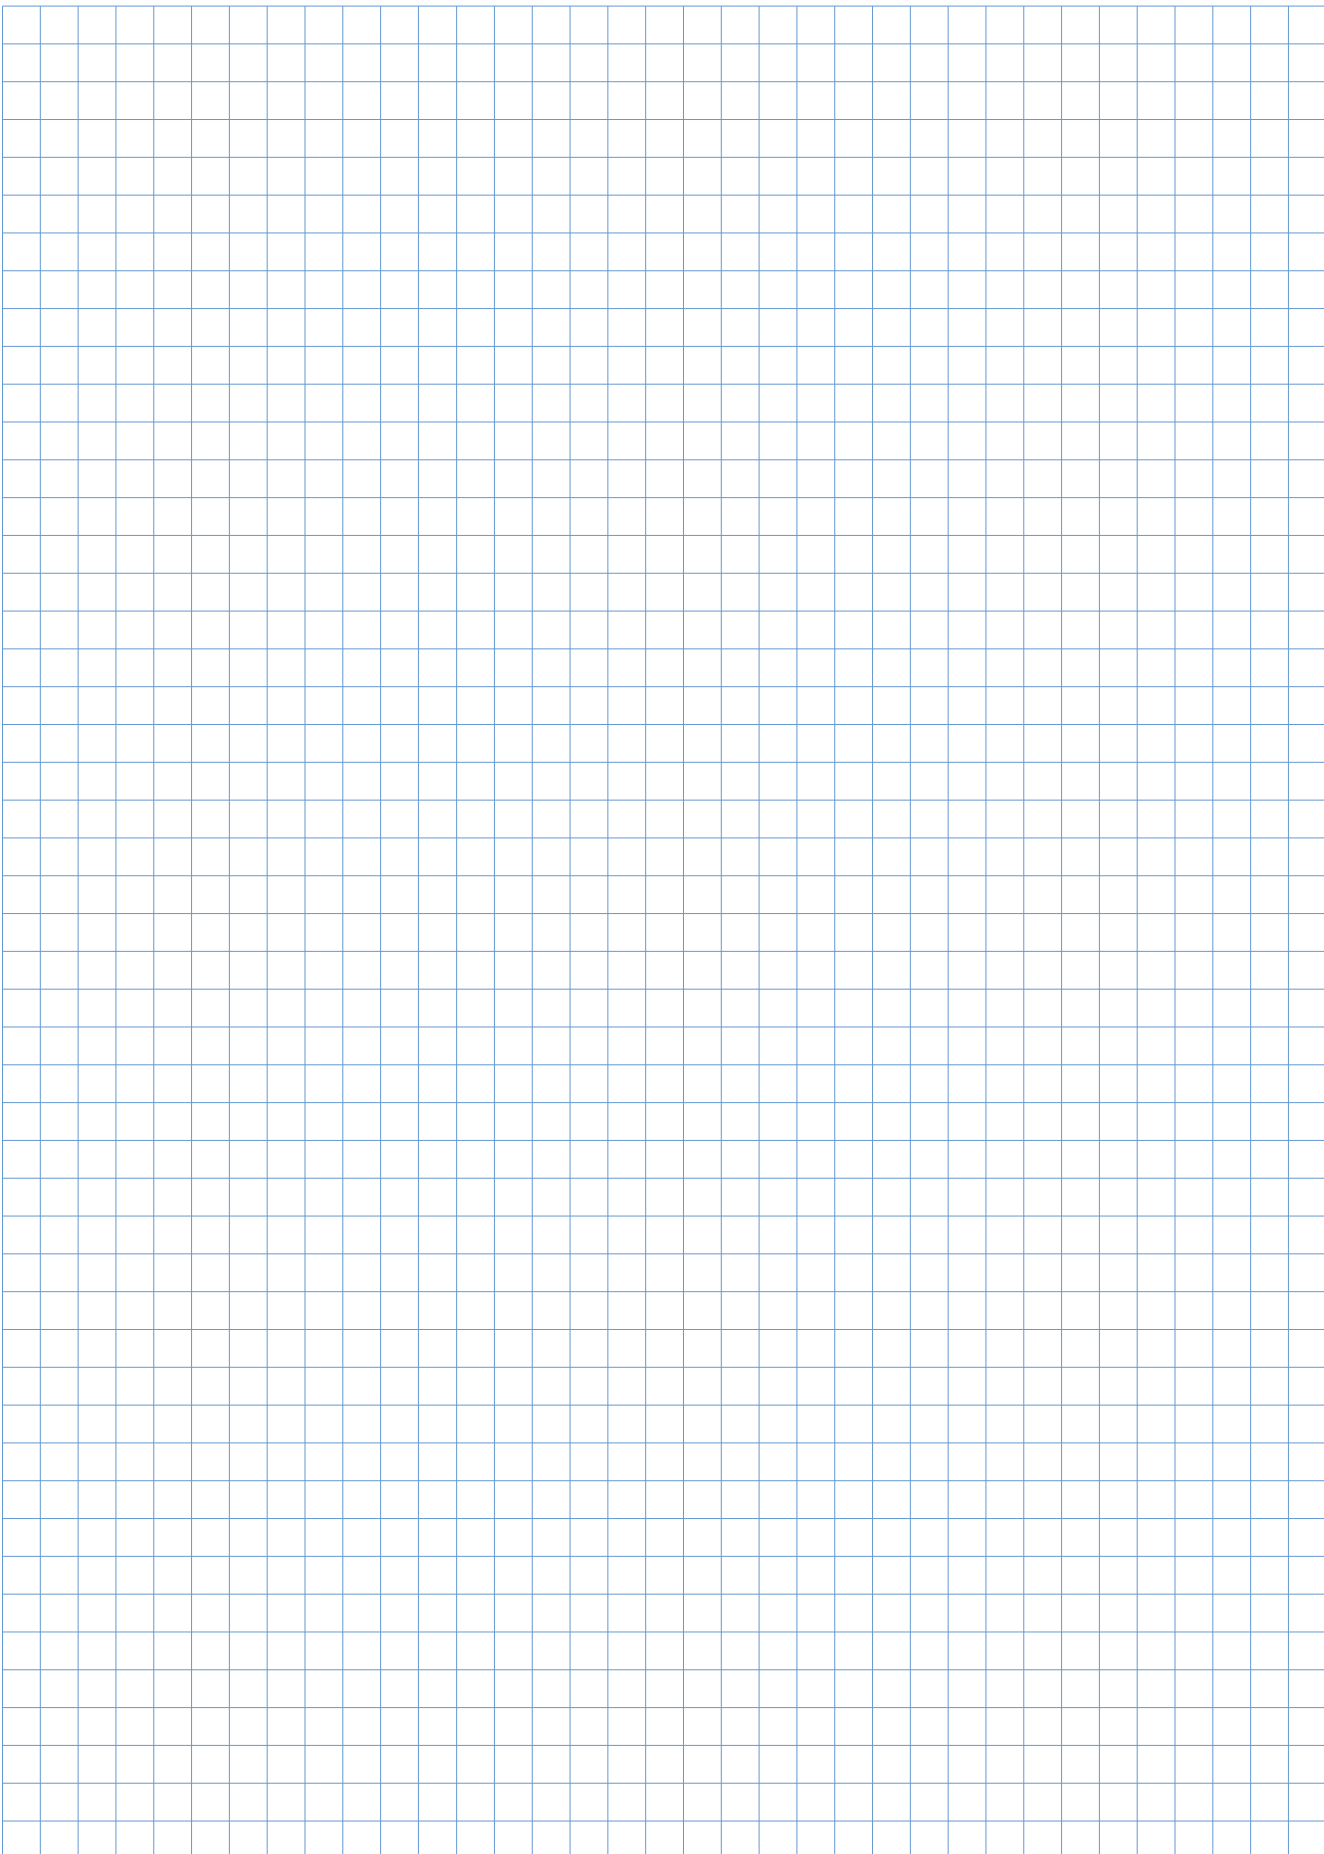

INDEX

| C | | |
|--------------------|---|-----------------------|
| CN-14A | FX-100 Connector | p.102 |
| CN-14A-C1 | | p.102/p.110 |
| CN-14A-C2 | FX-100 Connector Attached Cable | p.102/p.103/ p.110 |
| CN-14A-C3 | | p.102/p.110 |
| CN-14A-C5 | | |
| CN-14A-R-C1 | | p.102/p.110 |
| CN-14A-R-C2 | FX-100 Connector Attached Cable (Flexible) | |
| CN-14A-R-C3 | | |
| CN-14A-R-C5 | | |
| CN-71-C1 | | p.74/p.96 |
| CN-71-C2 | | |
| CN-71-C5 | | |
| CN-72-C1 | | |
| CN-72-C2 | | |
| CN-72-C5 | FX-500 Quick-connection Cable | |
| CN-73-C1 | | |
| CN-73-C2 | | |
| CN-73-C5 | | |
| CN-74-C1 | | |
| CN-74-C2 | | |
| CN-74-C5 | | |

| F | | |
|----------------|----------------------------------|------------------------------------|
| FB-1 | Fiber Bender | p.18/p.45/p.66 |
| FC-FX-1 | FX-100 Protection Cover | p.102/p.103 |
| FD-30 | Super Quality Fiber | p.11/p.39/p.56/ p.85 |
| FD-31 | Threaded Type Fiber | p.13/p.39/p.56/ p.85 |
| FD-31W | | |
| FD-32G | Threaded / Small Spot Type Fiber | p.13/p.23/p.39/ p.56/p.85/p.105 |
| FD-32GX | | |
| FD-40 | Super Quality Fiber | p.11/p.39/p.56/ p.86 |
| FD-41 | Threaded Type Fiber | p.13/p.39/p.56/ p.86 |
| FD-41S | Sleeve Fiber | p.19/p.39/p.56/ p.86/p.105 |
| FD-41SW | | |
| FD-41W | Threaded Type Fiber | p.13/p.39/p.56/ p.86/p.105 |
| FD-42G | Threaded / Small Spot Type Fiber | p.13/p.23/p.39/ p.57/p.86/p.106 |
| FD-42GW | | |
| FD-60 | Super Quality Fiber | p.11/p.39/p.57/ p.86 |
| FD-61 | Threaded Type Fiber | p.13/p.39/p.57/ p.87 |
| FD-61G | | |
| FD-61S | Sleeve Fiber | p.19/p.39/p.57/ p.87 |
| FD-61W | Threaded Type Fiber | p.13/p.39/p.57/ p.87/p.106 |
| FD-62 | | |
| FD-64X | | p.13/p.39/p.58/ p.87/p.106 |
| FD-A16 | Wide Beam Fiber | p.25/p.39/p.58/ p.87 |
| FD-AL11 | | |

| | | |
|----------------------|--|------------------------------|
| FD-E13 | Cylindrical / Sleeve Fiber | p.17/p.19/p.39/ p.58/p.88 |
| FD-E23 | | |
| FD-EG30 | Threaded / Small Spot Type Fiber | p.13/p.23/p.39/ p.58/p.88 |
| FD-EG30S | Sleeve Fiber | p.19/p.39/p.59/ p.88 |
| FD-EG31 | Threaded / Small Spot Type Fiber | p.13/p.23/p.39/ p.59/p.88 |
| FD-F4 | Liquid Leak / Liquid Detection Fiber | p.35/p.39/p.59 |
| FD-F41 | | |
| FD-F41Y | | |
| FD-F71 | | |
| FD-F8Y | | |
| FD-FA93 | Heat-resistant Fiber | p.31/p.40/p.60/ p.88 |
| FD-H13-FM2 | | |
| FD-H18-L31 | | |
| FD-H20-21 | | |
| FD-H20-M1 | | |
| FD-H25-L43 | Vacuum-resistant Fiber | p.31/p.40/p.60/ p.89 |
| FD-H25-L45 | | |
| FD-H30-KZ1V | Heat-resistant Fiber | p.33/p.44 |
| FD-H30-KZ1V-S | | |
| FD-H30-L32 | Heat-resistant Fiber | p.31/p.40/p.61/ p.89 |
| FD-H30-L32V | | |
| FD-H30-L32V-S | Vacuum-resistant Fiber | p.32/p.40/p.61/ p.89 |
| FD-H35-20S | Heat-resistant Fiber | p.31/p.40/p.61/ p.89 |
| FD-H35-M2 | | |
| FD-H35-M2S6 | | |
| FD-HF40Y | Liquid Leak / Liquid Detection Fiber | p.35/p.40/p.61 |
| FD-L10 | Convergent Reflective Type Fiber | p.26/p.40/p.62/ p.89 |
| FD-L11 | | |
| FD-L12W | | |
| FD-L20H | | |
| FD-L21 | | |
| FD-L21W | | |
| FD-L22A | | |
| FD-L23 | | |
| FD-L30A | | |
| FD-L31A | | |
| FD-L32H | | p.26/p.40/p.63/ p.90 |
| FD-R31G | Square Head / Small Spot Type Fiber | p.15/p.23/p.40/ p.63 |
| FD-R32EG | | |
| FD-R33EG | | |
| FD-R34EG | Square Head type Fiber | p.15/p.40/p.63 |
| FD-R41 | | |
| FD-R60 | Threaded Type Fiber | p.13/p.40/p.63/ p.90 |
| FD-R61Y | Square Head / Chemical / Oil-resistant Fiber | p.15/p.29/p.40/ p.91 |
| FD-S21 | Cylindrical Fiber | p.17/p.40/p.63/ p.91 |
| FD-S30 | Super Quality Fiber | p.11/p.40/p.64/ p.91 |
| FD-S31 | Cylindrical Fiber | p.17/p.40/p.64/ p.91 |
| FD-S32 | | |
| FD-S32W | | |
| FD-S33GW | | |
| FD-S60Y | Chemical / Oil-resistant Fiber | p.29/p.41/p.64/ p.91 |

INDEX

| | | | | | |
|------------------|--|-------------------------------|----------------------|---|-------------------------------|
| FD-V30 | Sleeve Fiber | p.19/p.41/p.64/ p.92 | FT-H13-FM2 | Heat-resistant Fiber | p.30/p.36/p.50/ p.80 |
| FD-V30W | | p.19/p.41/p.65/ p.92 | FT-H20-J20 | | p.31/p.44 |
| FD-V50 | | | FT-H20-J20-S | | p.30/p.36/p.50/ p.80 |
| FD-Z20HBW | Flat Type Fiber | p.21/p.41/p.65/ p.92 | FT-H20-J30 | | p.31/p.44 |
| FD-Z20W | | | FT-H20-J30-S | | p.30/p.36/p.50/ p.80 |
| FD-Z40HBW | | p.21/p.41/p.65/ p.92 | FT-H20-J50 | | p.31/p.44 |
| FD-Z40W | | | FT-H20-J50-S | | p.30/p.36/p.50/ p.80 |
| FD-Z50HW | Narrow Beam Fiber | p.24/p.41/p.65/ p.92 | FT-H20-M1 | | p.31/p.44 |
| FDP-1000 | Protective Tube (For Reflective Type Fiber) | p.45/p.67 | FT-H20-VJ50 | | p.31/p.44 |
| FDP-1500 | | | FT-H20-VJ50-S | | p.30/p.36/p.50/ p.80 |
| FDP-500 | | | FT-H20-VJ80 | | p.31/p.44 |
| FDP-N1000 | | | FT-H20-VJ80-S | | p.30/p.36/p.50/ p.80 |
| FDP-N1500 | | | FT-H20W-M1 | | p.33/p.44 |
| FR-KZ22E | Narrow Beam / Retroreflective Type Fiber | p.24/p.27/p.38/ p.55/p.84 | FT-H30-M1V | p.32/p.36/p.50/ p.80 | |
| FR-KZ50E | | | FT-H30-M1V-S | p.30/p.36/p.50/ p.81 | |
| FR-KZ50H | | | FT-H35-M2 | p.30/p.36/p.50/ p.81 | |
| FR-Z50HW | | | FT-H35-M2S6 | p.29/p.36/p.50/ p.81 | |
| FT-140 | Threaded Type Fiber | p.12/p.36/p.48/ p.79 | FT-HL80Y | Chemical / Oil-resistant Fiber | p.29/p.36/p.50/ p.81 |
| FT-30 | Super Quality Fiber | p.11/p.36/p.48/ p.79 | FT-J8 | Fiber for Atmospheric Side | p.33/p.44/p.66 |
| FT-31 | Threaded Type Fiber | p.12/p.36/p.48/ p.79 | FT-KS40 | Narrow Beam Fiber | p.24/p.36/p.51/ p.81 |
| FT-31S | Sleeve Fiber | p.19/p.36/p.48/ p.79/p.105 | FT-KV26 | | |
| FT-31W | Threaded Type Fiber | p.12/p.36/p.48/ p.79/p.105 | FT-KV40 | | |
| FT-40 | Super Quality Fiber | p.11/p.36/p.48/ p.79 | FT-KV40W | | |
| FT-42 | Threaded Type Fiber | p.12/p.31/p.36/ p.48/p.79 | FT-L80Y | Chemical / Oil-resistant Fiber | p.29/p.36/p.51/ p.81 |
| FT-42S | Sleeve Fiber | p.19/p.36/p.48/ p.79/p.105 | FT-R31 | Square Head Type Fiber | p.15/p.36/p.51 |
| FT-42W | Threaded Type Fiber | p.12/p.36/p.48/ p.79/p.105 | FT-R40 | Threaded Type Fiber | p.12/p.36/p.51/ p.81 |
| FT-43 | | | FT-R41W | p.14/p.15/p.36/ p.51/p.81 | |
| FT-45X | | | FT-R42W | p.15/p.37/p.51 | |
| FT-A11 | Wide Beam Fiber | p.25/p.36/p.49/ p.79/p.105 | FT-R43 | Square Head / Chemical / Oil-resistant Fiber | p.15/p.29/p.37/ p.52/p.82 |
| FT-A11W | | | FT-R44Y | p.16/p.37/p.52/ p.82 | |
| FT-A32 | | | FT-R60Y | p.11/p.37/p.52/ p.82 | |
| FT-A32W | | | FT-S11 | Cylindrical Fiber | p.16/p.37/p.52/ p.82 |
| FT-AL05 | | | FT-S20 | Super Quality Fiber | p.11/p.37/p.52/ p.82 |
| FT-E13 | Cylindrical / Sleeve Fiber | p.16/p.19/p.36/ p.49/p.80 | FT-S21 | Cylindrical Fiber | p.16/p.37/p.52/ p.82 |
| FT-E23 | | | FT-S21W | | p.16/p.37/p.52/ p.82/p.105 |
| FT-F93 | Liquid Leak / Liquid Detection Fiber | p.35/p.36/p.49 | FT-S30 | Super Quality Fiber | p.11/p.37/p.52/ p.82 |
| | | | FT-S31W | Cylindrical Fiber | p.16/p.37/p.52/ p.82/p.105 |
| | | | FT-S32 | | p.16/p.37/p.52/ p.82 |
| | | | FT-V23 | Sleeve Fiber | p.19/p.37/p.52/ p.82 |
| | | | FT-V24W | | p.19/p.37/p.53/ p.82 |
| | | | FT-V25 | | p.19/p.37/p.53/ p.83 |
| | | | FT-V30 | | |
| | | | FT-V40 | | Cylindrical Fiber |
| | | | FT-V80Y | Chemical / Oil-resistant Fiber | p.29/p.37/p.53/ p.83 |

New product
introductionTough
FiberFiber
Selection
Guide

Model

Choose
by shape/
applicationHow to read
Model No.Earlier models
comparison
table

Fibers

Super
QualityThreaded
TypeSquare Head
TypeCylindrical
Type

Sleeve

Flat
TypeSmall
SpotNarrow
BeamWide
BeamConvergent
Reflective
TypeRetroreflective
TypeChemical / Oil-
resistantHeat-
resistantVacuum-
resistantLiquid Leak /
Liquid DetectionFiber
OptionsSemi-custom
fibersFiber
DimensionsThru-beam
TypeRetroreflective
TypeReflective
Type

Others

Amplifiers

FX-500
seriesFX-100
series

INDEX

INDEX

| | | | | |
|--------------------|---|-----------------------------|--|-------------------------|
| FT-Z20HBW | Flat Type Fiber | p.20/p.37/p.53/ p.83 | | |
| FT-Z20W | | | | |
| FT-Z30 | | | | |
| FT-Z30E | | | | |
| FT-Z30EW | | | | |
| FT-Z30H | | | | |
| FT-Z30HW | | | | |
| FT-Z30W | | | | |
| FT-Z40HBW | | | p.20/p.37/p.54/ p.84 | |
| FT-Z40W | | | | |
| FT-Z802Y | Chemical / Oil-resistant Fiber | p.29/p.37/p.54/ p.84 | | |
| FTP-500 | Protective Tube (For Thru-beam Type Fiber) | p.45/p.66 | | |
| FTP-1000 | | | | |
| FTP-1500 | | | | |
| FTP-N500 | | | | |
| FTP-N1000 | | | | |
| FTP-N1500 | | | | |
| FV-BR1 | Photo-terminal for Vacuum-resistant Fiber | p.33/p.44/p.66 | | |
| FV-LE1 | Vacuum-resistant Expansion Lens | p.33/p.42/p.66 | | |
| FV-SV2 | Vacuum-resistant Side-view Lens | | | |
| FX-101 | Digital Fiber Sensor FX-100 series | p.102/p.103/ p.104/p.110 | | |
| FX-101-CC2 | | | | |
| FX-101P | | | | |
| FX-101P-CC2 | | | | |
| FX-102 | | | | |
| FX-102-CC2 | | | | |
| FX-102P | | | | |
| FX-102P-CC2 | | | | |
| FX-501 | | | Digital Fiber Sensor FX-500 series | p.74/p.76/p.77/ p.96 |
| FX-501P | | | | |
| FX-502 | | | | |
| FX-502P | | | | |
| FX-505-C2 | | | | |
| FX-505P-C2 | p.74/p.76/p.78/ p.96 | | | |
| FX-AT15A | Fiber Single-core Holder | p.45 | | |
| FX-AT2 | Fiber Attachment | p.44/p.67 | | |
| FX-AT3 | | | | |
| FX-AT4 | | | | |
| FX-AT5 | | | | |
| FX-AT6 | | | | |
| FX-CT2 | | | Fiber Cutter | p.44 |
| FX-CT3 | | | | |
| FX-LE1 | Lens for Thru-beam Type Fiber | p.42/p.67 | | |
| FX-LE2 | | | | |
| FX-MB1 | FX-500 Fiber Amplifier Protection Seal | p.75/p.76 | | |
| FX-MR1 | Lens for Reflective Type Fiber | p.23/p.43/p.67 | | |
| FX-MR2 | | | | |
| FX-MR3 | | | | |
| FX-MR5 | | p.23/p.43/p.68 | | |
| FX-MR6 | | | | |
| FX-MR7 | | | | |
| FX-MR8 | | | | |
| FX-MR9 | | | | |
| FX-SV1 | | | Side-view Lens for Thru-beam Type Fiber | p.42/p.69 |

M

| | | |
|-----------------|-----------------------------------|-------------|
| MS-AJ1-F | Universal Sensor Mounting Stand | p.45 |
| MS-AJ2-F | | |
| MS-DIN-2 | FX-500 Amplifier Mounting Bracket | p.75/p.96 |
| MS-DIN-4 | FX-100 Amplifier Mounting Bracket | p.102/p.110 |

| | | |
|-------------------|---------------------------------|---------------------------|
| MS-DIN-E | End Plate | p.74/p.96/ p.102/p.110 |
| MS-EX3 | FX-MR2 Mounting Bracket | p.69 |
| MS-FD-2 | Fiber Mounting Bracket | p.33/p.44/p.69 |
| MS-FD-3 | | |
| MS-FD-F7-1 | FD-F71 SUS Mounting Bracket | p.35 |
| MS-FD-F7-2 | FD-F71 PVC Mounting Bracket | |
| MS-FX-01Y | Liquid Inflow Prevention Joint | p.35/p.45 |
| MS-FX-02Y | Protective Tube Extension Joint | |
| MS-FX-03Y | Fiber Mounting Joint | |
| MS-FX-YF | Joint Internal Ferrule | |
| | | |

R

| | | |
|---------------|------------------------------------|-----------|
| RF-003 | FR-KZ50E/KZ50H Exclusive Reflector | p.44/p.69 |
| RF-13 | Reflective Tape | |
| RF-210 | Reflector | p.45/p.69 |
| RF-220 | | |
| RF-230 | | |

Communication Unit for Open Network

SC-GU3 SERIES

The digital sensor can be connected directly to the 3 types of open network!

Other types of analog input sensors can also be connected!

CC-Link
SC-GU3-01



DeviceNet
SC-GU3-02




EtherCAT
SC-GU3-03



Scattered digital sensors can be centrally managed and set through an open network.

| | | | |
|---------------------------|---------------------------------------|---------------------------------------|--|
| Applicable Digital Sensor | Digital Fiber Sensor FX-501 FX-502 | Digital Laser Sensor LS-501 LS-403 | Digital Pressure Sensor DPS-401 DPS-402 |
|---------------------------|---------------------------------------|---------------------------------------|--|

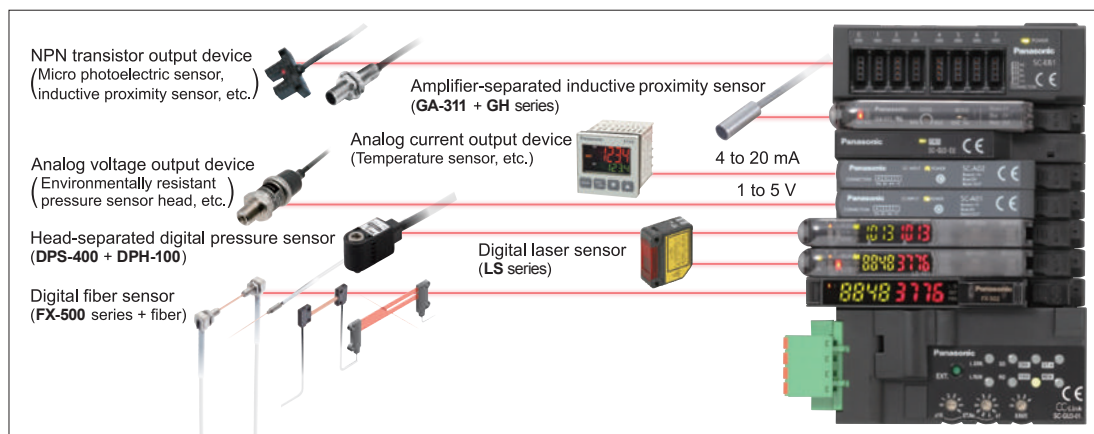

Please contact

Panasonic Industrial Devices SUNX Co., Ltd.

2431-1 Ushiyama-cho, Kasugai-shi, Aichi, 486-0901, Japan
 ■Telephone: +81-568-33-7211 ■Facsimile: +81-568-33-2631
 Global Sales Department
 ■Telephone: +81-568-33-7861 ■Facsimile: +81-568-33-8591
panasonic.net/id/pidsx/global

