

Barksdale

Installation And Maintenance Instructions

435 SERIES

DIV. 2 HAZARDOUS LOCATIONS

NONINCENDIVE PRESSURE TRANSMITTER

CAUTION: This device should only be installed by properly trained service personnel.

Specifications:

Calibration Reference Conditions

Ambient Temperature: 75°F
Relative Humidity: 40 to 60%
Barometric Pressure: 29.92 in. Hg.

Performance Characteristics

Accuracy (LH&R): ±0.25%, Best Straight Line (BSL) @ 75°F
Long Term Stability: Will repeat within ±0.25% FSO of original calibration curve for 1 year
Proof Pressure: 2 times rated pressure range, or 13,000 psi, whichever is less
Life, Cycling: Full scale pressure cycles: 10⁸ to 300 psi, 10⁷ to 1,000 psi, 10⁶ to 7,500 psi
Vibration: 15 g's, 10 to 2000 Hz (MIL-STD-202, M204, Cond. B)
Shock: 50 g's, 11 ms (MIL-STD-202, M213, Cond. G)
Wetted Material: 300 series and 17- 4 PH stainless steel.
Electrical Connection: 1 meter jacketed cable, standard See alternate connections on back
Pressure Cavity Volume: 0.075 inches maximum
Enclosure Rating: NEMA 4X

Excitation: 12 to 28 VDC
Output: 4 to 20 mA
Zero Output: 4 mA, ± 2.0% of FSO @ 75°F
Full Scale Output: 20 mA, ± 1.0% @ 75°F
Protection: Reverse polarity protected
Loop Resistance: See loop resistance chart on back
Temperature Range: Compensated: -40° to +160°F (-40° to 71°C)
Operating: -40° to 185°F (-40° to 85°C)
Agency Temp.Code: T4
Temperature Error: ±0.01% of FSO/°F over the compensated range.
Weight: 5.9 oz (167.5 grams)
Wiring:

H3, H5 Cable	T4, T5 Pins
Red (+Excite)	Pin1
Black (Common)	Pin2
Drain (Case Ground)	Pin4


H6 - SJO Cord Wire Code:
White (+Excite)
Black (Common)
Green (Case Ground)


CALIBRATION

All models are tested to meet or exceed the published specifications. The calibration and testing were done using instrumentation and standards traceable to the National Institute of Standards and Technology (NIST). Also tested in accordance with MIL-STD-45662A.

Agency Approval

Nonincendive Pressure Transmitter for Use in Hazardous Locations Class I, Div.2, Groups A, B, C & D, Class II, Div.2, Groups F & G

 435-H3(-E), T4 (-E), T5 (-E) Models
Telemetering Equipment for Use in Hazardous Locations-Component
UL File No. E146589, Guide No. WYMV2, WYMV8.

 435-H5(-E), -H6 (-E) Models
Telemetering Equipment for Use in Hazardous Locations
UL File No. E146589, Guide No. WYMV, WYMV7.

WARNING! READ BEFORE INSTALLATION

Fluid hammer and surges can destroy any pressure transducer and must always be avoided. A pressure snubber should be installed to eliminate the damaging hammer effects. Fluid hammer occurs when a liquid flow is suddenly stopped, as with quick closing solenoid valves. Surges occur when flow is suddenly begun, as when a pump is turned on at full power or a valve is quickly opened.

Barksdale pressure transmitter having a pressure range 2,000 psi and higher have a built in pressure surge protection in the input port. The design is such that an orifice is made an integral part of the pressure port. Designed with the upstream side of the orifice as a sharp corner, it acts as a very effective protection. Other orifice devices can be installed upstream of the pressure transmitter in the piping system for extra protection where the system engineer requires it.

Liquid surges are particularly damaging to pressure transmitters if the pipe is originally empty. To avoid damaging surges, fluid lines should remain full (if possible), pumps should be brought up to power slowly, and valves opened slowly. To avoid damage from both fluid hammer and surges, a surge chamber should be installed, and a pressure snubber should be installed on every transmitter.


Symptoms of fluid hammer and surge's damaging effects:

1. Pressure transmitter exhibits an output at zero pressure (large zero offset). If zero offset is less than 10% FS, user can usually re-zero meter, install proper snubber and continue monitoring pressures.
2. Pressure transmitter output remains constant regardless of pressure.
3. In severe cases, there will be no output.


TORQUE REQUIREMENTS:

Apply pipe compound sparingly to male pipe threads only. Avoid pipe strain on Transmitter housing by properly supporting and aligning piping. Apply wrench to the hex flats of fittings only, then tighten the connection. Adequate support of piping and proper mounting of the pressure transmitter should be made to avoid excessive shock and vibration.


TORQUE TO 125 - 150 pound inches.

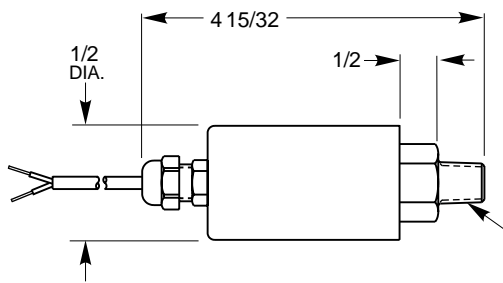

**H3 SHIELDED JACKETED CABLE
ELECTRICAL CONNECTION-STANDARD**




1/4 NPT PRESSURE PORT
FOR 7/16-20 UNF (FEMALE) ADD -P1 TO P/N.
FOR 7/16-20 UNF (MALE) ADD -P3 TO P/N.
FOR 1/8-27 NPT MALE ADD -P7 TO P/N.
FOR 1/4 NPT FEMALE ADD -P6 TO P/N.

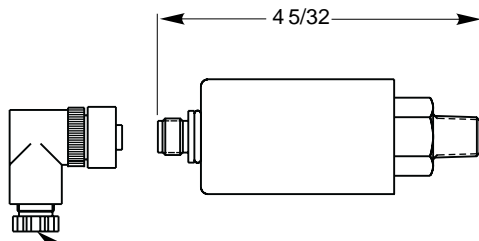


MATING PLUG
M12 X 1 4 PIN
(NOT PROVIDED)


**T4 12 mm DIN
ELECTRICAL CONNECTION**

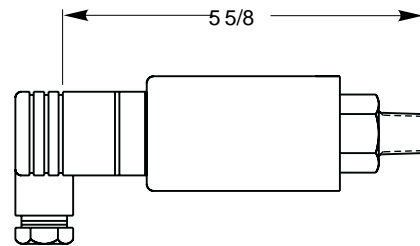

**T5 TYPE 43650 DIN
ELECTRICAL CONNECTION**

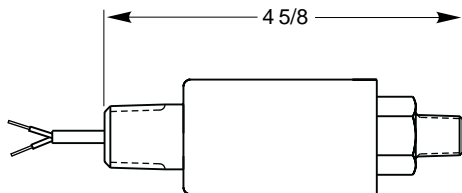


**H5 1/2 NPT CONDUIT
ELECTRICAL CONNECTION**

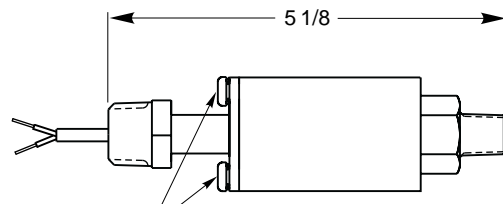

**ADJ. ACCESS SCREWS MUST BE
INSTALLED TO SEAL ENCLOSURE**


**H5-E 1/2 NPT ELECTRICAL CONNECTION
WITH FIELD ZERO/SPAN ADJUSTMENTS**

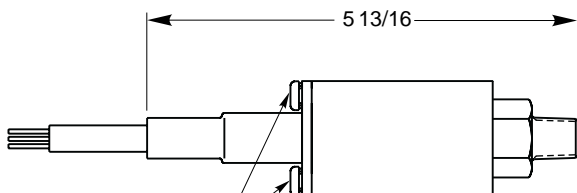

**ADJ. ACCESS SCREWS MUST BE
INSTALLED TO SEAL ENCLOSURE**

**H6-E SJO CORD ELECTRICAL CONNECTION
WITH FIELD ZERO/SPAN ADJUSTMENTS**

LOOP RESISTANCE CHART

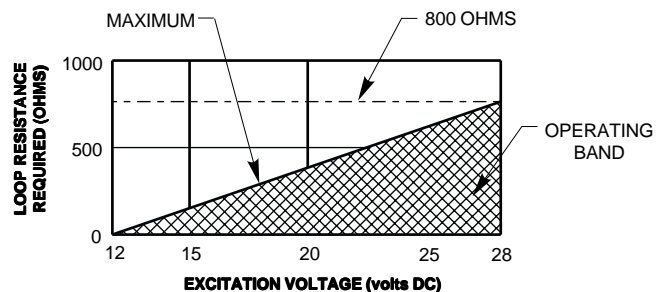

RETURN REQUESTS / INQUIRIES

Direct all warranty and repair requests/inquiries to Barksdale, Inc. Customer Service Department. Call 323-589-6181, FAX: 323-589-3463

BEFORE RETURNING ANY PRODUCT(S) TO BARKSDALE, YOU MUST OBTAIN A RETURNED MERCHANDISE AUTHORIZATION FROM OUR CUSTOMER SERVICE DEPARTMENT (IN ORDER TO AVOID PROCESSING DELAYS).

FOR WARRANTY RETURNS, please have the following information available BEFORE contacting Barksdale:

1. P.O. number under which the product was PURCHASED.
2. Model number of the product under warranty.

3. Repair instructions and/or specific problems you are having with the product.
4. Application information.

FOR NON-WARRANTY REPAIRS OR CALIBRATION, consult Barksdale for current repair/calibration charges. Have the following information available BEFORE contacting Barksdale:

1. Your P.O. number to cover the COST of the repair/calibration.
2. Model number of product.
3. Repair instructions and/or specific problems you are having with the product.

Copyright 2000 Barksdale, Inc.