


Section 4: Fasteners

T-Blocks and Springs   

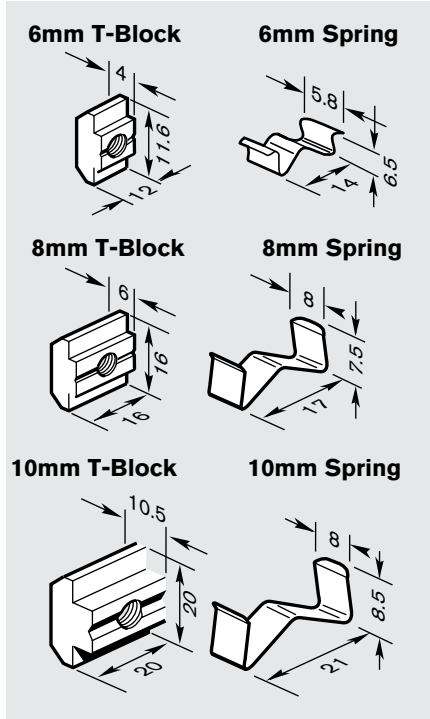

Helpful Hint


To simplify installation, use a spring to hold the T-block in position in the T-slot while making vertical connections.


Features:

- Slide into ends of T-slot
- Used to fasten heavy loads to T-slotted profiles; seven-thread engagement for strong, secure mounting
- Large contact surface with inside of profile's T-slot provides secure fastening
- Can be easily repositioned in T-slot
- Spring can be used on any 6mm, 8mm, or heavy (H-series) 10mm T-slot to hold T-block in place while making vertical connections

Material:

- 6mm: stainless steel
- 8mm and 10mm: zinc-plated steel
- Spring: spring steel

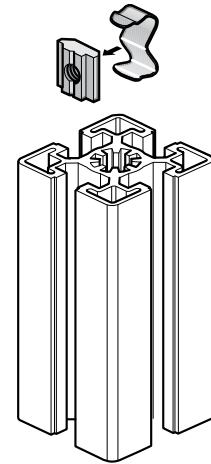

Description	Tightening Torque (± 5%)	Lot Size	Part Number
6mm T-Blocks 			
M4	2.5 Nm	1	3 842 523 140 <i>GoTo</i>
M5	5 Nm	1	3 842 523 142
Spring for 6mm T-block		1	3 842 523 145 <i>GoTo</i>
8mm T-Blocks			
M4	2.5 Nm	1	3 842 514 928
M5	5 Nm	1	3 842 514 929 <i>GoTo</i>
M6	10 Nm	1	3 842 514 930 <i>GoTo</i>
M8	25 Nm	1	3 842 514 931 <i>GoTo</i>
Spring for 8mm T-block		1	3 842 516 685 <i>GoTo</i>
10mm T-Blocks			
M5	5 Nm	1	3 842 528 741
M6	10 Nm	1	3 842 528 738 <i>GoTo</i>
M8	25 Nm	1	3 842 528 735 <i>GoTo</i>
Spring for 10mm T-block		1	3 842 516 669 <i>GoTo</i>