



94A SERIES

Full-Port Brass Ball Valve

Job Name:	Contractor:
Job Location:	P.O. Number:
Engineer:	Representative:
Tag:	Wholesale Distributor:

DESCRIPTION

The Apollo® International 94A forged brass ball valves combine reliable operation with maximum economy. Ideal for plumbing, HVAC and gas service applications. Valves include most pertinent agency approvals.

FEATURES

- Full-Port
- Blow-out Proof Stem Design
- Adjustable Stem Packing Nut
- Silicone Free

PERFORMANCE RATING

- Valve Design Rating: 600 CWP (400 CWP 2-1/2" to 4")
- Temperature Range 0°F - 400°F

MATERIALS

Part Name	Material
Body	Forged Brass (Cu >57%)
Retainer	Forged Brass (Cu >57%)
Ball	Brass, Cr plated
Stem	Brass, Cr plated
Seats	PTFE
Stem Packing	PTFE
Gland Nut	Brass
Friction Washer	PTFE
Handle	Steel w/corrosion resistant plating
Handle Cover	PVC
Handle Nut	Steel w/corrosion resistant plating

APPROVALS

CSA: 1/4"-4" NPT per ANSI Z21.15/CGA 9.1 (1/2 psi)

1/4"-4" NPT per ASME B16.44 (5 psi)

1/2"-2" NPT per ASME B16.33 (125 psi)

2 1/2"-4" NPT per ASME B16.38 (125 psi)

UL: Guides YQNZ, YRBX, YRPV, and YSDT (NPT only)

FM: 1/4"-2" per FM1140 (<175 psi)

NSF: 1/4"-2" meets ANSI/NSF 61 - 8, 2007

MSS SP-110: Ball Valves Threaded, Socket-Welding, Solder joint, Grooved and Flared Ends



OPTIONAL HANDLE KITS

SIZE	REPLACEMENT LEVER HANDLES	2-1/4" STEM EXTENSION + MEMORY STOP
1/4" - 3/8"	W932400	78217101
1/2"	W932500	78217201
3/4"	W936000	78217301
1"	W932600	78217401
1-1/4"	W932700	78217501
1-1/2" - 2"	W932800	78217601
2-1/2" - 3"	W932900	78217701
4"	W933000	N/A



DIMENSIONS

Part No.	Size	A	B	C	D	E	Wt. (lbs.)
NPT							
94A10101	1/4"	0.395	1.746	1.278	3.543	-	0.33
94A10201	3/8"	0.407	1.756	1.278	3.543	-	0.30
94A10301	1/2"	0.583	2.047	1.921	3.543	-	0.44
94A10401	3/4"	0.748	2.362	2.087	3.780	-	0.66
94A10501	1"	0.945	2.756	2.559	4.528	-	1.10
94A10601	1 1/4"	1.260	3.307	2.953	4.528	-	1.57
94A10701	1 1/2"	1.575	3.661	3.346	5.512	-	2.40
94A10801	2"	1.969	4.181	3.681	5.512	-	3.37
94A10901	2 1/2"	2.520	5.378	4.764	8.661	-	7.60
94A10001	3"	2.953	6.039	5.079	8.661	-	9.36
94A10A01	4"	3.898	7.386	5.866	9.606	-	16.85
SWEAT							
94A20301	1/2"	0.583	2.047	1.839	3.543	0.630	0.38
94A20401	3/4"	0.748	2.748	1.996	3.780	0.878	0.64
94A20501	1"	0.945	3.228	2.441	4.528	1.130	0.99
94A20601	1 1/4"	1.260	3.819	2.854	4.528	1.378	1.40
94A20701	1 1/2"	1.575	4.425	3.169	5.512	1.630	2.17
94A20801	2"	1.969	5.315	3.449	5.512	2.130	2.97
94A20901	2 1/2"	2.520	6.283	4.764	8.661	2.630	6.36
94A20001	3"	2.953	7.150	5.079	8.661	3.130	8.32
94A20A01	4"	3.945	9.276	5.866	9.606	4.130	15.78

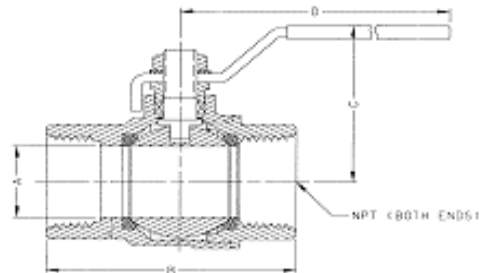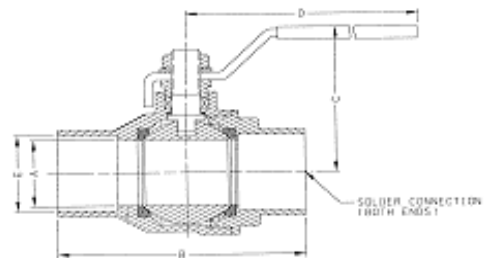

Conbraco Industries, Inc. 701 Matthews Mint Hill Rd. Matthews NC 28106 USA; www.apollovalves.com; 704-841-6000

This specification is provided for reference only. Conbraco reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Conbraco products previously or subsequently sold.