

# BREATHERS

## Non-Desiccant (ND-2)

Prevent contamination when humidity is not an issue



### APPLICATIONS

- Oil sight glasses
- Small gearboxes



# Overview

## Non-Desiccant Breathers: The Highlights


- Filter element captures particles down to 0.3-micron absolute ( $\beta_{0.3} \geq 1000$ )
- O-ring seal with pipe threading eliminates the need for additional sealant
- Durable nylon 6/6 body
- Filter creates impenetrable barrier against water droplets
- Provides longer oil life
- Reduces wear and tear on equipment, prolongs life

## Dimensions & Connections:

Product Specifications	DC-ND-2
Unit Height	1.4"/3.4cm
Unit Diameter	1.8"/4.6cm
Shipping Weight per Unit	0.06lbs./0.03kg
Amount of Desiccant	n/a
Max. Adsorption Capacity (fl oz./ml)	n/a
Max. Air Flow Rate (cfm)	0.67 @ 1psid
Max. Fluid Flow Rate (lpm/gpm)	19/5.02
Filtration	0.3 $\mu$ absolute ( $\beta_{0.3} \geq 1000$ )
Operating Temp. Range	-40°F-300°F/ -40°C-149°C
Hydrophilic Agent	n/a
Filter Media	ePTFE
Connection Size	3/8"
Body Material	Nylon 6/6 (33% glass-filled)

## How It Works

As wet, contaminated air is drawn through the unit, the hydrophobic media repels water while the particulate filter captures dirt, preventing both from entering the equipment.

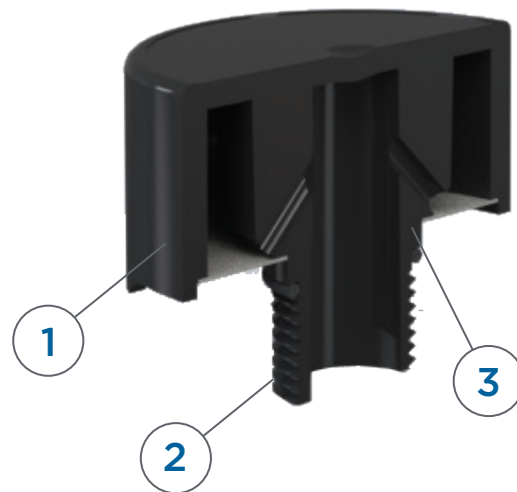

## By the Numbers

### 1-Rugged Exterior

Durable, shock-absorbing housing

### 2-Threaded Mounting

Easily replaces standard filler/breather cap with adapter/reducer options

### 3-Hydrophobic Filter Element

Particulate filter element repels water and protects against dirt



**DES-CASE**

Buy: [www.ValinOnline.com](http://www.ValinOnline.com) | Phone 844-385-3099 | Email: [CustomerService@valin.com](mailto:CustomerService@valin.com)

© 2019 Des-Case Corporation. All rights reserved.  
Des-Case\* is a registered trademark of Des-Case Corporation

+1.615.672.8800 • [descase.com](http://descase.com) • +31 (0) 182.24.48.88  
PS1909-ND2