


MTO-2

Light Weight Oil Applications




- 2" NPT Steel Screw Plug
- Steel Sheath Elements
- 23 - 26 W/In²
- 1.5 - 6 kW
- Without Thermostat
- 120, 208, 240 and 480 Volt, Single Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure

E1 — Dimensions (Inches)

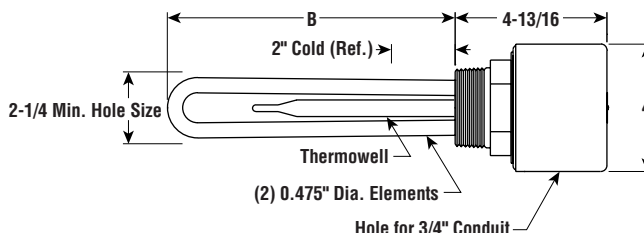

E2 — Dimensions (Inches)

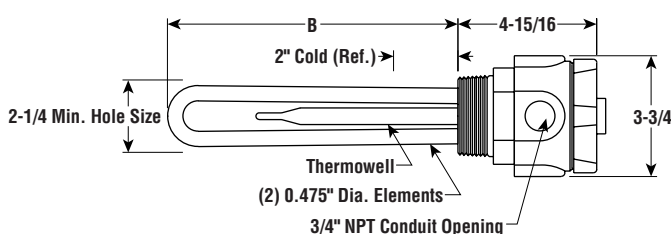

FASTShip

Same-day shipping on stock item orders received before 4 pm CST.
3-day shipping on assembly-stock items.

Specifications and Ordering Information

						E1 General Purpose ¹				E2 Moisture Resistant/Explosion Resistant ²			
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)
1.5	120	1	24	2	11-3/4	MTO-215A	S	139740	3	MTO-215E2	AS	288518	6
1.5	208	1	24	2	11-3/4	MTO-215A	AS	323627	3	MTO-215E2	AS	323635	6
1.5	240	1	24	2	11-3/4	MTO-215A	S	139758	3	MTO-215E2	AS	288526	6
1.5	480	1	24	2	11-3/4	MTO-215A	S	139766	3	MTO-215E2	S	288534	6
2	120	1	24	2	17-3/4	MTO-220A	AS	139774	4	MTO-220E2	AS	288542	7
2	208	1	24	2	17-3/4	MTO-220A	AS	323643	4	MTO-220E2	AS	323651	7
2	240	1	24	2	17-3/4	MTO-220A	S	139782	4	MTO-220E2	AS	288550	7
2	480	1	24	2	17-3/4	MTO-220A	S	139790	4	MTO-220E2	S	288569	7
2.5	120	1	26	2	19-5/8	MTO-225A	AS	139803	4	MTO-225E2	AS	288577	7
2.5	208	1	26	2	19-5/8	MTO-225A	AS	323660	4	MTO-225E2	AS	323678	7
2.5	240	1	26	2	19-5/8	MTO-225A	S	139811	4	MTO-225E2	AS	288585	7
2.5	480	1	26	2	19-5/8	MTO-225A	S	139820	4	MTO-225E2	AS	288593	7
3	120	1	23	2	24-7/8	MTO-230A	AS	139838	4	MTO-230E2	AS	288606	7
3	208	1	23	2	24-7/8	MTO-230A	AS	323686	4	MTO-230E2	AS	323694	7
3	240	1	23	2	24-7/8	MTO-230A	S	139846	4	MTO-230E2	AS	288614	7
3	480	1	23	2	24-7/8	MTO-230A	S	139854	4	MTO-230E2	AS	288622	7
4	120	1	23	2	32-3/4	MTO-240A	AS	139862	6	MTO-240E2	AS	288630	9
4	208	1	23	2	32-3/4	MTO-240A	AS	323707	6	MTO-240E2	AS	323715	9
4	240	1	23	2	32-3/4	MTO-240A	S	139870	6	MTO-240E2	AS	288649	9
4	480	1	23	2	32-3/4	MTO-240A	S	139889	6	MTO-240E2	AS	288657	9
5	120	1	23	2	40-1/4	MTO-250A	AS	139897	7	MTO-250E2	AS	288665	10
5	208	1	23	2	40-1/4	MTO-250A	AS	323723	7	MTO-250E2	AS	323731	10
5	240	1	23	2	40-1/4	MTO-250A	S	139900	7	MTO-250E2	AS	288673	10
5	480	1	23	2	40-1/4	MTO-250A	S	139918	7	MTO-250E2	AS	288681	10
6	208	1	23	2	47-3/4	MTO-260A	AS	323740	7	MTO-260E2	AS	323758	10
6	240	1	23	2	47-3/4	MTO-260A	S	139926	7	MTO-260E2	AS	288690	10
6	480	1	23	2	47-3/4	MTO-260A	S	139934	7	MTO-260E2	AS	288702	10

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Recognized and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified.