

Omron Adept Cobra s800 Inverted



The Omron Adept Cobra™ s800 Inverted robot is an affordable, high-performance overhead mounting SCARA robot system for mechanical assembly, material handling, packaging, machine tending, and screw driving. It is ideal for mounting above a conveyor belt, increasing the footprint efficiency. Adept Cobra s-Series robots include the Adept SmartController™ motion controller, which provides performance capabilities unmatched in the industry.

Product Features and Benefits

- Omron Adept ACE™ software to deploy your applications through a user-friendly interface
- High-resolution, absolute encoders to provide high accuracy, superior slow-speed following, and easy calibration
- High-efficiency, low-inertia Harmonic Drives™ and a lightweight arm to deliver maximum acceleration
- 8 kHz servo update rate to improve path following and control
- Diagnostics display enables faster trouble shooting
- Ethernet TCP/IP capability to control the robot through a PC, PLC, or controller
- Complete interchangeability between robots and controllers


The Omron Adept Cobra s800 Inverted robot comes with the high-performance Adept SmartController™ motion controller, which is based on the Adept SmartServo architecture. It has a small footprint of 329w x 187d x 86h mm.

Specifications


Reach	800 mm
Payload	Rated 2 kg Max. 5.5 kg
Adept Cycle	
Burst Mode	0.54 sec
Sustained (20°C)	0.54 sec
Joint Ranges	
Joint 1	± 123.5°
Joint 2	± 156.5°
Joint 3	210 mm
Joint 4	± 360°
Joint Speeds	
Joint 1	386°/sec
Joint 2	720°/sec
Joint 3	1100 mm/sec
Joint 4	1200°/sec
Repeatability	
XY	± 0.017 mm
Z	± 0.003 mm
Theta	± 0.019°
Pass-Through Connections	
Electrical	24 (12 twisted pairs)
Pneumatic	6 mm (x2) 4 mm (x3)
DeviceNet	1
Digital I/O Channels	
AIB:	12 inputs, 8 outputs
Controller:	12 inputs, 8 outputs
Optional solenoid:	4 outputs
Weight	51 kg
Environmental Requirements	
Ambient Temperature	5 - 40 °C
Humidity Range	5 - 90 % (non-condensing)
Power Requirements for SmartController	
24 VDC :	5 A
Power Requirements for AIB	
24 VDC :	6 A
200 - 240 V AC :	10 A, single-phase
CE and cULus Compliant	

OMRON ADEPT COBRA s800 INVERTED


Dimensions Adept Cobra s800 Inverted

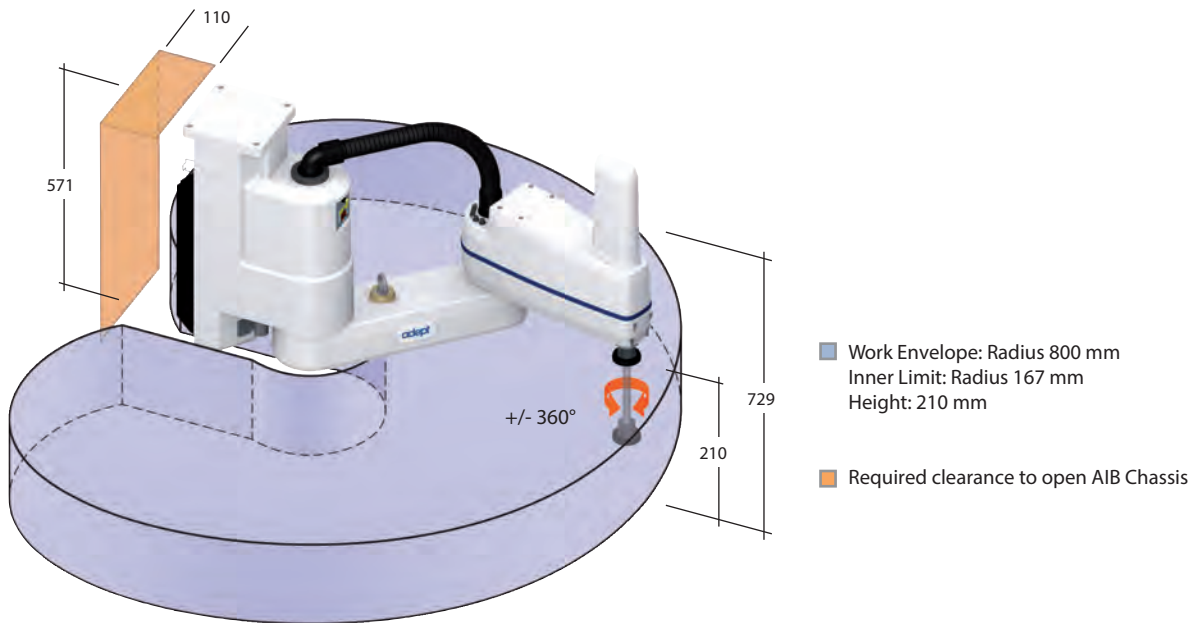

Dimensions: Flange (mm)

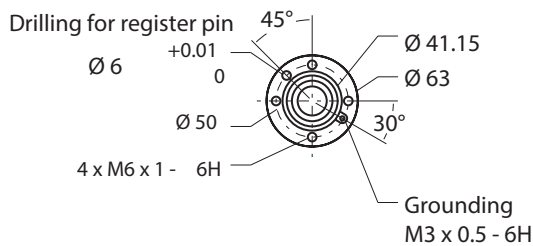

Dimensions: Footprint (mm)



The Omron Adept Cobra s800 system includes the following:

- Omron Adept Cobra s800 Inverted robot with AIB (Amplifiers In Base)
- Omron Adept SmartController motion controller
- Front panel with E-Stop
- Omron Adept ACE software
- User documentation

Downloads:

Download CAD files for the Adept Cobra s800 Inverted robot from <http://www.omron247.com>

Options and Peripherals:

- AdeptSight™ vision guidance and inspection system (requires a PC—Adept recommends using the Adept SmartVision™ EX)
- T2 manual control pendant
- Dual robot configuration option
- Conveyor-tracking option
- sMI6 SmartMotion™ interface
- sDIO I/O expansion (32 digital input and 32 digital output channels)
- IO Blox I/O module (8 digital input and output channels each)
- High-resolution Joint 4 option
- Solenoid valve kit
- IP-65 + Cleanroom ISO4 (class 10) option
- Adjustable Hardstop Kit



Omron Adept Technologies, Inc.

Tel: 925-245-3400 Email: info@adept.com

omron247.com

Specifications subject to change without notice.

©2016 Omron. ALL RIGHTS RESERVED.

Pub Number R65I-E-01

09366-011 Rev. D

Buy: www.ValinOnline.com | Phone 844-385-3099 | Email: CustomerService@valin.com