

KUS

Cube Tower




- LED
- Bulb
- 1** Alarm Sound
- 80** db at 1m
- IP54** (Except KUS-B)
- 70

The KUS Series cube tower; uses advanced technology with a modular design to combine two different lights on one unit.

FEATURES

- Light modules can be stacked up to 4 tiers in any color combination.
- RoHS Compliance for Models KUS-24, KUS24F, KUS-EA-R/Y/G/B/C.
- Lenses are made of heat and shock resistant polycarbonate resin.
- Each light has a built-in dip switch to control the light on or off.
- Maximum power consumption of the base unit is 21 watts.
- Light and Base units are sold separately.
- IP rating of IP54 (Except the KUS-B)
- KUS-F flashes 60 times a minute.

How to Order

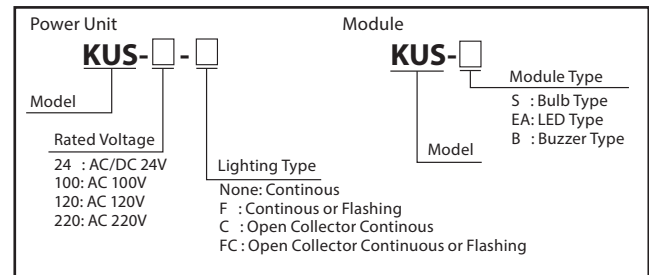


Specifications

| Power Unit | Model | Rated Voltage | Power Consumption | Bulb | |
|--|-------------|---------------|-------------------|---------|-----------|
| | | | | Ratings | Repl. No. |
| Continuous Lighting | KUS -24 | AC/DC 24V | 21W | 6W | 24V 6W |
| | KUS -100 | AC 100V | | | |
| | KUS -120 | AC 120V | | | |
| | KUS -220 | AC 220V | | | |
| Continuous Lighting or Flashing | KUS -24 F | AC/DC 24V | 21W | 6W | 24V 6W |
| | KUS -100 F | AC 100V | | | |
| | KUS -120 F | AC 120V | | | |
| | KUS -220 F | AC 220V | | | |
| Open-Collector Continuous Lighting | KUS -24 C | AC/DC 24V | 21W | 6W | 24V 6W |
| | KUS -100 C | AC 100V | | | |
| | KUS -120 C | AC 120V | | | |
| | KUS -220 C | AC 220V | | | |
| Open-Collector Continuous Lighting or Flashing | KUS -24 FC | AC/DC 24V | 21W | 6W | 24V 6W |
| | KUS -100 FC | AC 100V | | | |
| | KUS -120 FC | AC 120V | | | |
| | KUS -220 FC | AC 220V | | | |


| Model | Rated Voltage | Power Consumption | Volume |
|-------|---------------|-------------------|--------------|
| KUS-B | DC 24V | 0.5W | 80dB (at 1m) |

Dimensions (Unit: mm)

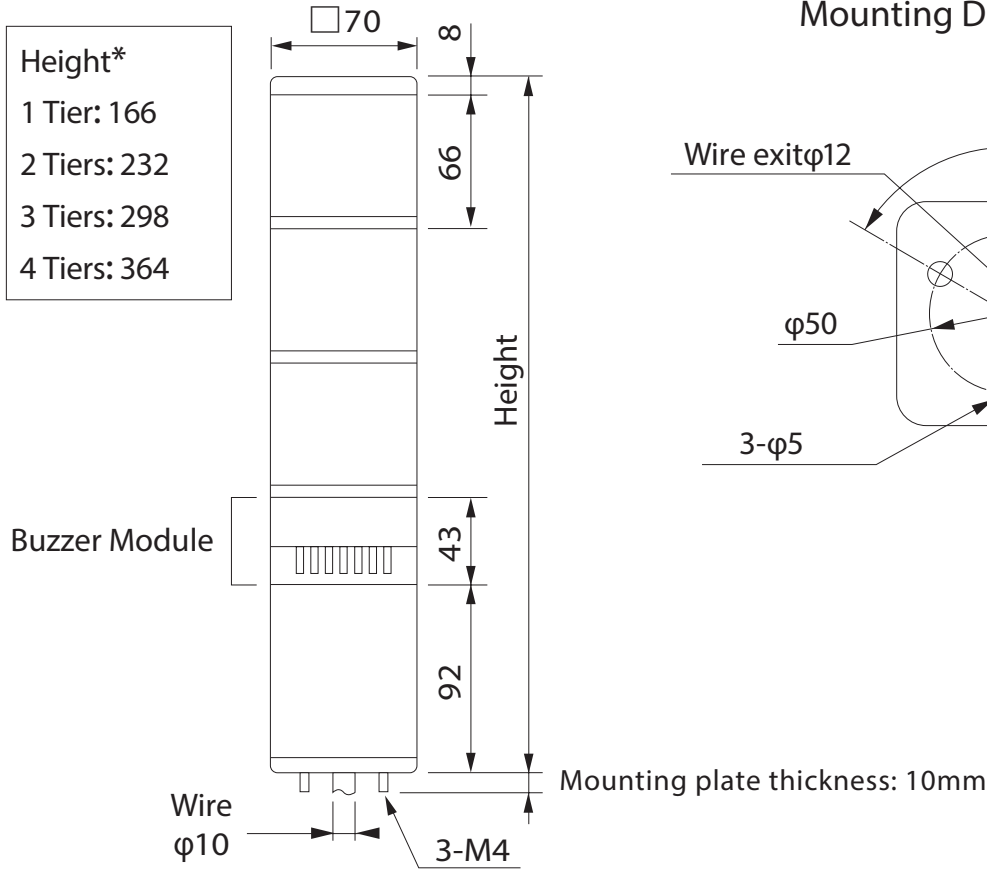


* Buzzer module height not included

Mounting Dimensions

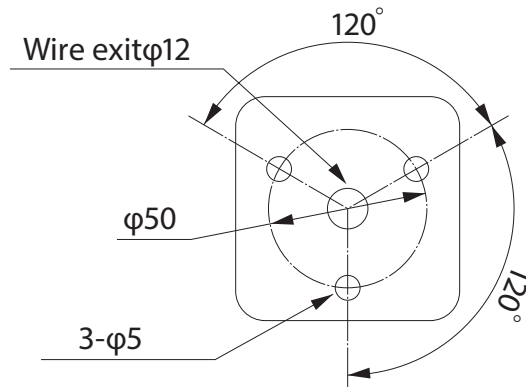

Wiring

Contact Input Type (KUS, KUS-F)

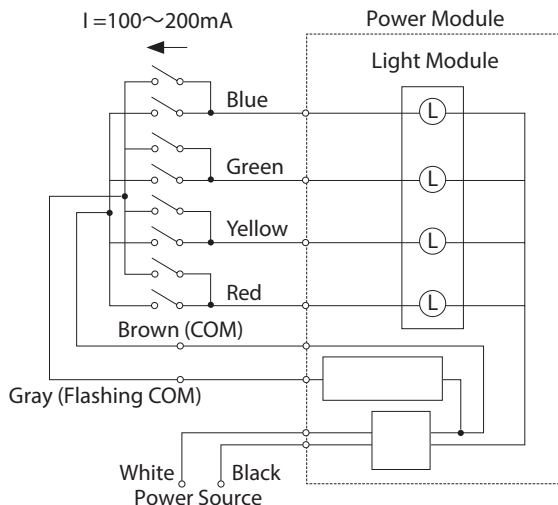

Open-collector Type (NPN/PNP for KUS-FC,C)

