



PR Platinum RTD Probes

- 6, 9, 12, 18 and 24" Lengths
- Custom Lengths Available
- 100 Ohm Element (European)
- 304 SS Sheath
- PFA Teflon® Coating Available

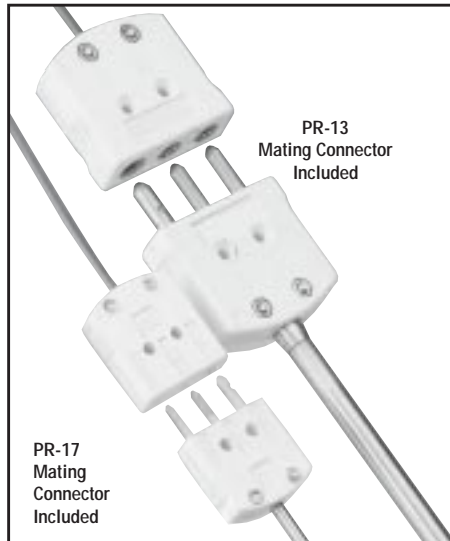

In Stock:

Model	PCN
PR-11-2-100-1/4-6-E/C	308013
PR-11-2-100-1/4-12-E/C	308021
PR-11-2-100-1/4-18-E/C	308030

Features

General Purpose RTD-Probe, Type PR-11
A general purpose probe, with transition style junction, and 36" lead wires, with stripped end termination. Lead wires are insulated with PFA Teflon®.

Quick Disconnect, Type PR-13
A general purpose probe, with electrical connections made via a standard size OTP 3-prong connector. Each unit is supplied with

mating connector. Available in 1/8, 3/16 or 1/4" diameters, with standard probe lengths from 6 to 24".

Miniature Quick Disconnect, Type PR-17
General purpose probes, with a 1/8" O.D. 304 SS sheath, in lengths from 6 to 24". Each probe terminates with a MTP miniature 3-prong connector, with the mating connector included.

Specifications and Ordering Information

Model	Lead Type†	Ohms at 0°C	Sheath (In.)
PR-11			
PR-11-2-100-(1)-6-E/C	2	100	6
PR-11-2-100-(1)-9-E/C	2	100	9
PR-11-2-100-(1)-12-E/C	2	100	12
PR-11-2-100-(1)-18-E/C	2	100	18
PR-11-2-100-(1)-24-E/C	2	100	24
PR-13			
PR-13-2-100-(1)-6-E/C	2	100	6
PR-13-2-100-(1)-9-E/C	2	100	9
PR-13-2-100-(1)-12-E/C	2	100	12
PR-13-2-100-(1)-18-E/C	2	100	18
PR-13-2-100-(1)-24-E/C	2	100	24
PR-17²			
PR-17-2-100-1/8-6-E/C	2	100	6
PR-17-2-100-1/8-9-E/C	2	100	9
PR-17-2-100-1/8-12-E/C	2	100	12
PR-17-2-100-1/8-18-E/C	2	100	18
PR-17-2-100-1/8-24-E/C	2	100	24

1. Specify probe diameter, 1/8, 3/16 or 1/4 inch.
2. Also available in 1/16 inch diameter.
†3-wire lead configuration.

Teflon® is a registered trademark of DuPont.