## **Components**

# ST & PT

## 1-1/2" Wide

- Two Terminals, Centered (type ST)
- Two Terminals, One End (type PT)
- 5-1/2 23-3/4" Lengths
- 125 1,000 Watts
- 120 and 240 Volt
- 12 27 W/In<sup>2</sup>


## **Applications**

Strip heaters are used for heat transfer by conduction or convection to heat liquids, air, gases and surfaces. See guidelines in the Strip Heater Overview section.






## Dimensions (type PT)

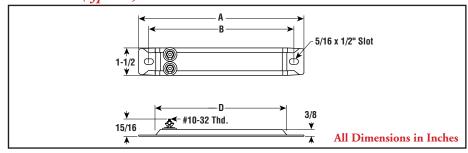

## Dimensions (type ST)

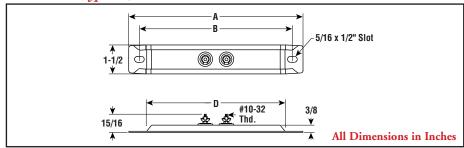

### Specifications and Ordering Information

Specifications and Ordering Information										
Dimensions (In.)						120V		240V		Wt.
A	В	D	Watts	W/In²	Model	Stock	PCN	Stock	PCN	(Lbs.)
ST — Chrome Steel Sheath										
10-1/2 12 15-1/4	9-1/2 11 14-1/4	9 10-1/2 13-3/4	350 500 500	15 17 12	ST-1003 ST-1205 ST-1505	NS NS NS	133102 133129 133145	NS NS NS	133110 133137 133153	0.8 0.9 1.1
17-7/8 23-3/4	16-7/8 22-3/4	16-3/8 22-1/4	750 1,000	15 14	ST-1807 ST-2401	NS NS	133161 133188	NS NS	133170 133196	1.4 1.8
PT — Rust-Resisting Iron Sheath										
5-1/2 6	4-1/2 5	4 4-1/2	125 150	14 14	PT-512 PT-615	S S	131959 131967	S S	257017 131975	0.4 0.5
PT — Chrome Steel Sheath										
5-1/2 6	4-1/2 5	4 4-1/2	250 300	27 27	PT-502 PT-603	S S	132329 132337	S	257025 132345	0.4 0.5

**Stock Status: S** = stock AS = assembly stock NS = non-stock **To Order**—Specify model, PCN, watts, volts and quantity.

Note — Chromalox can furnish type PT made-to-order lengths between 7-1/2 and 23-3/4". As an option, see type OT strip heaters.

