

# Conductivity, pH/ORP & Disinfection

## W600 Series Controllers

The W600 series provides reliable, flexible and powerful control for your water treatment program.




### Summary of Key Benefits



- Large touchscreen display with icon based programming makes setup easy
- Universal sensor input provides extraordinary flexibility; the same controller can be used with almost any type of sensor needed
- Combination Sensor Input and Analog Input board that add even more flexibility
- Lead/Lag control of up to 6 relays
- Optional dual analog (4-20 mA) input for Fluorometers or nearly any other process value
- Multiple language support allows simple setup no matter where your business takes you
- Six control outputs allow the controller to be used in more applications
- Economical wall-mount package for easy installation
- On-screen and web page graphing of sensor values and control output status
- Two Virtual Inputs that are calculated from two real inputs (cycles of concentration, % rejection, etc.)
- The W600 with amperometric chlorine sensors can be used for reporting chlorine residual measurements in accordance with EPA Method 334.0.
- Complete flexibility in the function of each relay
  - On/Off Setpoint
  - Time Proportional Control
  - Proportional Control (when purchased with 4-20mA or pulse solid state opto outputs)
  - PID Control (when purchased with 4-20mA or pulse solid state opto outputs)
  - In-Range or Out-of-Range activation
  - Probe wash
  - Timer-based activation
  - Activation based upon the state of a contact closure
  - Timed activation triggered by a Water Contactor or Paddlewheel flow meter's accumulated total flow
  - Activate with another output
  - Activate as a percent of another output's on-time
  - Alarm
  - Spike Set Point
  - For Cooling Tower and Boiler applications:
    - Biocide Timer
    - Boiler blowdown on conductivity using intermittent sampling
- Datalogging
- Emailing Alarm messages, Datalog, Graph, or System Summary reports
- Ethernet option for remote access via the Internet, LAN or Modbus/TCP

## Mechanical (Sensors) (\*see graph)

Sensor	Pressure	Temperature	Materials	Process Connections
Electrodeless conductivity	0-150 psi (0-10 bar)*	CPVC: 32-158°F (0 to 70°C)* PEEK: 32-190°F (0 to 88°C)	CPVC, FKM in-line o-ring PEEK, 316 SS in-line adapter	1" NPTM submersion 2" NPTM in-line adapter
pH	0-100 psi (0-7 bar)*	50-158°F (10-70°C)*	CPVC, Glass, FKM o-rings, HDPE, Titanium rod, glass-filled PP tee	1" NPTM submersion 3/4" NPTF in-line tee
ORP	0-100 psi (0-7bar)*	32-158°F (0-70°C)*		
Contacting conductivity (Condensate)	0-200 psi (0-14 bar)	32-248°F (0-120°C)	316SS, PEEK	3/4" NPTM
Contacting conductivity Graphite (Cooling Tower)	0-150 psi (0-10 bar)*	32-158°F (0-70°C)*	Graphite, Glass-filled PP, FKM o-ring	3/4" NPTM
Contacting conductivity SS (Cooling Tower)	0-150 psi (0-10 bar)*	32-158°F (0-70°C)*	316SS, Glass-filled PP, FKM o-ring	3/4" NPTM
Contacting conductivity (Boiler)	0-250 psi (0-17 bar)	32-401°F (0-205°C)	316SS, PEEK	3/4" NPTM
Contacting conductivity (High Pressure Tower)	0-300 psi (0-21 bar)*	32-158°F (0-70°C)*	316SS, PEEK	3/4" NPTM
pH (High Pressure)	0-300 psi (0-21 bar)*	32-275°F (0-135°C)*	Glass, Polymer, PTFE, 316SS, FKM	1/2" NPTM gland
ORP (High Pressure)	0-300 psi (0-21 bar)*	32-275°F (0-135°C)*	Platinum, Polymer, PTFE, 316SS, FKM	1/2" NPTM gland
Free Chlorine/Bromine	0-14.7 psi (0-1 bar)	32-113°F (0-45°C)	PVC, Polycarbonate, silicone rubber, SS, PEEK, FKM, Isoplast	1/4" NPTF Inlet 3/4" NPTF Outlet
Extended pH Range Free Chlorine/Bromine	0-14.7 psi (0-1 bar)	32-113°F (0-45°C)		
Total Chlorine	0-14.7 psi (0-1 bar)	32-113°F (0-45°C)		
Chlorine Dioxide	0-14.7 psi (0-1 bar)	32-131°F (0-55°C)		
Ozone	0-14.7 psi (0-1 bar)	32-131°F (0-55°C)		
Peracetic Acid	0-14.7 psi (0-1 bar)	32-131°F (0-55°C)		
Hydrogen Peroxide	0-14.7 psi (0-1 bar)	32-113°F (0-45°C)		
Flow switch manifold	0-150 psi (0-10 bar) up to 100°F (38°C)* 0-50 psi (0-3 bar) at 140°F (60°C)	32-140°F (0-60°C)*	GFRPP, PVC, FKM, Isoplast	3/4" NPTF
Flow switch manifold (High Pressure)	0-300 psi (0-21 bar)*	32-158°F (0-70°C)*	Carbon steel, Brass, 316SS, FKM	3/4" NPTF

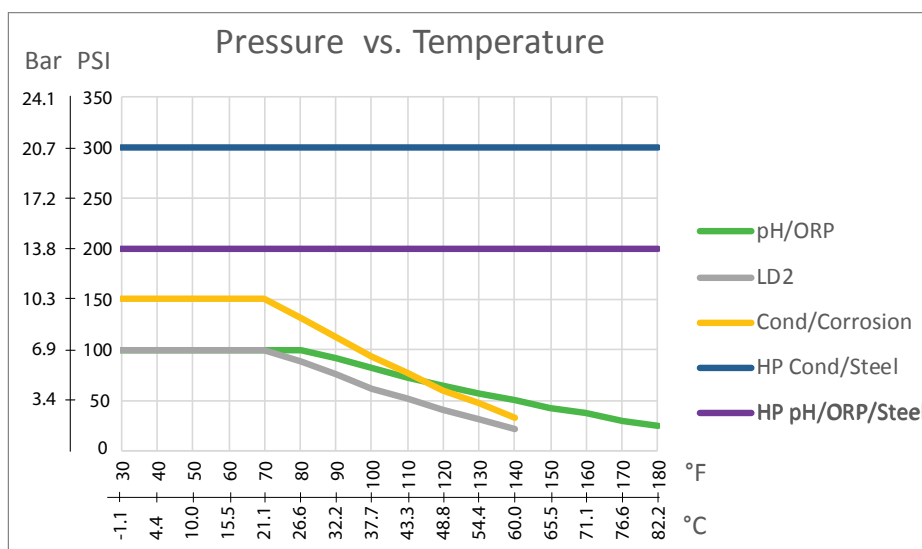

# Dimensions

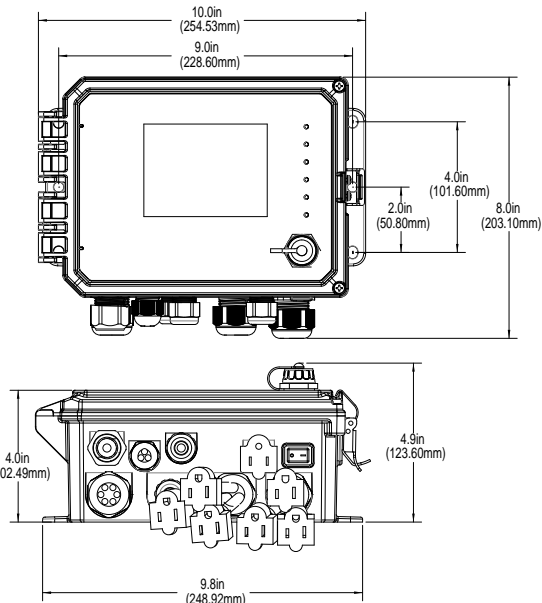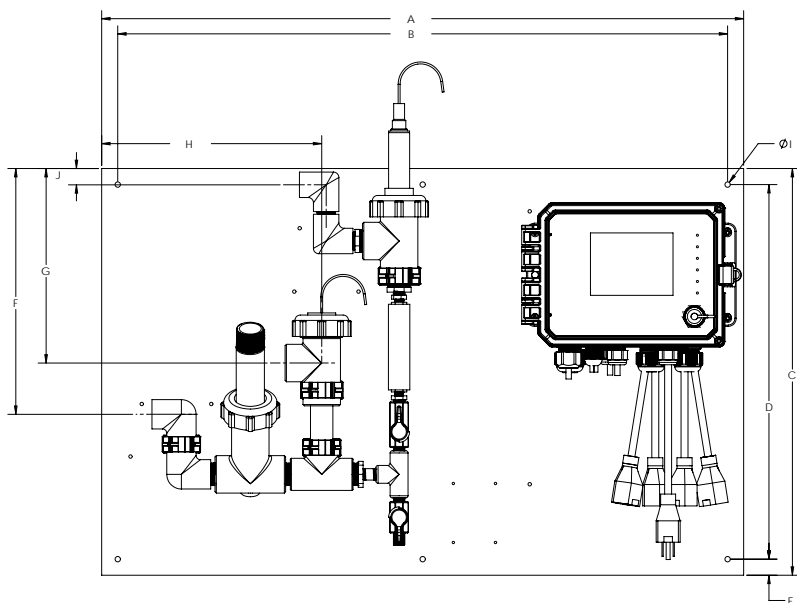

## Panel Mounted Flow Switch Manifold Dimensions

W600	A	B	C	D	E	F	G	H	I	J
Tolerances:	+/- 0.1" (2.5 mm)					+/- 0.3" (8 mm)			+/- 0.01" (0.25 mm)	+/- 0.3" (8 mm)
W600-CT-BN/FN	13" (330 mm)	12" (305 mm)	11.75" (298 mm)	10.75" (273 mm)	0.5" (12.7 mm)	7" (178 mm)	2" (51 mm)	1.5" (38 mm)	0.25" (6.35 mm)	
W600-CT-BA, BB, BC, FA, FB, FC	22.5" (571 mm)	21.5" (546 mm)	11.75" (298 mm)	10.75" (273 mm)	0.5" (12.7 mm)	4" (102 mm)	1.5" (38 mm)	11" (279 mm)		
W600-CT-BD, FD, BK	24" (610 mm)	22.5" (571 mm)	19" (483 mm)	17.5" (445 mm)	.75" (19 mm)	14" (356 mm)	7" (178 mm)	6.8" (173 mm)		
W600-CT-BQ, FQ, BU	24" (610 mm)	22.5" (571 mm)	19" (483 mm)	17.5" (445 mm)	.75" (19 mm)	14" (356 mm)	5" (127 mm)	6.8" (173 mm)		
W600-CT-BH, BI, BJ, FH, FI, FJ	24" (610 mm)	22.5" (571 mm)	19" (483 mm)	17.5" (445 mm)	.75" (19 mm)	10" (254 mm)	5.5" (140 mm)	8.5" (216 mm)		
W600-CT-BR, BS, BT, FR, FS, FT	24" (610 mm)	22.5" (571 mm)	19" (483 mm)	17.5" (445 mm)	.75" (19 mm)	10" (254 mm)	5" (127 mm)	8.5" (216 mm)		
W600-CT-DN	22.5" (571 mm)	21.5" (546 mm)	11.75" (298 mm)	10.75" (273 mm)	0.5" (12.7 mm)	7" (178 mm)	7" (178 mm)	10" (254 mm)		
W600-CT-DE/DF	22.5" (571 mm)	21.5" (546 mm)	11.75" (298 mm)	10.75" (273 mm)	0.5" (12.7 mm)	4" (102 mm)	2" (51 mm)	110" (254 mm)		
W600-CT-HN	24" (610 mm)	22.5" (571 mm)	19" (483 mm)	17.5" (445 mm)	0.75" (19 mm)	14" (356 mm)	6" (152 mm)	3" (76 mm)		
W600-CT-HA, HB, HC	24" (610 mm)	22.5" (571 mm)	19" (483 mm)	17.5" (445 mm)	0.75" (19 mm)	11" (279 mm)	6" (152 mm)	3" (76 mm)		
W600-CT-HD, HK	24" (610 mm)	22.5" (571 mm)	19" (483 mm)	17.5" (445 mm)	0.75" (19 mm)	14.75" (375 mm)	8" (203 mm)	6.5" (165 mm)		
W600-CT-HH, HI, HI	24" (610 mm)	22.5" (571 mm)	19" (483 mm)	17.5" (445 mm)	0.75" (19 mm)	11.75" (298 mm)	8" (203 mm)	6.5" (165 mm)		
W600-CT-HQ, HU	24" (610 mm)	22.5" (571 mm)	19" (483 mm)	17.5" (445 mm)	0.75" (19 mm)	14.75" (375 mm)	6.5" (165 mm)	6.5" (165 mm)		
W600-CT-HR, HS, HT	24" (610 mm)	22.5" (571 mm)	19" (483 mm)	17.5" (445 mm)	0.75" (19 mm)	11.75" (278 mm)	6.5" (165 mm)	6.5" (165 mm)		
W600-PH-PN/PX	22.5" (571 mm)	21.5" (546 mm)	11.75" (298 mm)	10.75" (273 mm)	0.5" (12.7 mm)	4" (102 mm)	1.5" (38 mm)	11" (279 mm)		
W600-PH-QN/QX	22.5" (571 mm)	21.5" (546 mm)	11.75" (298 mm)	10.75" (273 mm)	0.5" (12.7 mm)	7" (178 mm)	4" (102 mm)	1.5" (38 mm)		
W600-DS-PN	22.5" (571 mm)	21.5" (546 mm)	11.75" (298 mm)	10.75" (273 mm)	0.5" (12.7 mm)	11" (279 mm)	7.5" (191 mm)	3" (76 mm)		0" (0 mm)
W600-DS-PX	24" (610 mm)	22.5" (571 mm)	19" (483 mm)	17.5" (445 mm)	0.75" (19 mm)	11.5" (292 mm)	9" (229 mm)	10" (254 mm)		0.75" (19 mm)

# Ordering Information

WCT  
WBL  
WPH  
WDS  
WCN

RELAYS/WIRING

WCT600P

Example: WCT600PCSNE- BI

INPUT CARDS

CS

ANALOG OUTPUTS

N

ETHERNET

E

SENSORS

- BI

## RELAYS/WIRING

<b>6 powered relays</b>		
600H	Hardwired	
600P	Prewired with USA cords and pigtails	
600D	Prewired with DIN power cord, no pigtails	
<b>2 powered 4 dry relays</b>		
610H	Hardwired	
610P	Prewired with USA cord and 2 pigtails	
610D	Prewired with DIN power cord, no pigtails	
<b>2 opto 4 dry relays</b>		
620H	Hardwired	
620P	Prewired with USA cord and two 20 ft. pulse cables	
620D	Prewired with DIN power cord, no pigtails	
<b>4 opto 2 dry relays</b>		
640H	Hardwired	
640P	Prewired with USA cord and four 20 ft. pulse cables	
640D	Prewired with DIN power cord, no pigtails	

## INPUT CARDS

NN	No sensor input cards
SN	One sensor input card
SS	Two sensor input cards
CS	One sensor input card & one combination sensor/analog input card
CN	One combination sensor/analog input card
CA	One combination sensor/analog input card & one dual analog input card
CC	Two combination sensor/analog cards
AN	One dual analog input card
AA	Two dual analog input cards
SA	One sensor input card and one dual analog input card

## ANALOG OUTPUTS

N	No analog outputs
A	One dual isolated analog output card

## ETHERNET

N	No Ethernet
E	Ethernet card
M	Ethernet card with Modbus/TCP

## WBL BOILER SENSORS

	Type of Input card required
NN	No sensor
AN	Boiler sensor with ATC, K=1.0, 250 psi, 20 ft. cable
BN	Boiler sensor without ATC, K=1.0, 250 psi, 20 ft. cable
CN	Condensate sensor with ATC, K=0.1, 200 psi, 10 ft. cable
DN	Boiler sensor with ATC, K=10, 250 psi, 20 ft. cable
AA	Two boiler sensors, with ATC, K=1.0, 250 psi, 20 ft. cables
BB	Two boiler sensor without ATC, K=1.0, 250 psi, 20 ft. cables
CC	Two condensate sensors with ATC, K=0.1, 200 psi, 10 ft. cables
DD	Two Boiler sensors with ATC, K=10, 250 psi, 20 ft. cables
AB	Boiler sensor with ATC, K=1.0 and boiler sensor without ATC, K=1.0, 250 psi, 20 ft. cables
AC	Boiler sensor with ATC, K=1.0 20 ft.cable and Condensate sensor with ATC, K=0.1, 250 psi, 10 ft. cable
AD	Boiler sensor with ATC, K=1.0 and Boiler sensor with ATC, K=10, 250 psi, 20 ft. cables
BC	Boiler sensor without ATC, 20 ft. and condensate sensor with ATC, 10 ft. cable
BD	Boiler sensor without ATC and Boiler sensor with ATC, K=10, 250 psi, 20 ft. cables
CD	Condensate sensor with ATC, 10 ft. cable and Boiler sensor with ATC, K=10, 250 psi, 20 ft. cable

## WDS DISINFECTION SENSORS

NN	No sensors or flow switch manifold	
PN	Single DIS manifold on panel*	S or C
PX	DIS manifold plus pH/ORP/cooling tower cond tee on panel**	SS or CS or CC
FN	Single DIS flow cell/cable, no sensor*	S or C
FF	Two DIS flow cell/cable, no sensors*	SS or CS or CC

\*Order disinfection sensor(s) separately

\*\*Order disinfection sensor and WEL electrode and preamplifier housing or cooling tower conductivity sensor separately

## WCN CONDUCTIVITY SENSORS

NN	No sensors or flow switch manifold*	S or C for each sensor to be used
----	-------------------------------------	-----------------------------------

\*Order conductivity sensor separately

## WPH pH/ORP SENSORS

	Type of Input card required
NN	No sensors or flow switch manifold
PN	Single low pressure manifold on panel**
QN	Single high pressure manifold on panel with 190783*
PX	Dual low pressure manifold on panel**
QX	Dual high pressure manifold on panel with two 190783*

\*Order 102029 pH and/or 102963 ORP electrodes separately

\*\*Order WEL electrode(s) and preamplifier housing(s) separately

## WCT COOLING TOWER SENSORS

	Type of Input card required
NN	No sensor
AN	Inline graphite contacting conductivity
BN	Graphite contacting conductivity + Flow Switch manifold on panel
CN	High pressure contacting conductivity
DN	High pressure contacting conductivity + Flow Switch manifold on panel
EN	Inline 316SS contacting conductivity
FN	316SS contacting conductivity + Flow Switch manifold on panel
GN	Inline electrodeless conductivity
HN	Electrodeless conductivity + Flow Switch manifold on panel
<b>Graphite contacting conductivity + Flow Switch manifold on panel</b>	
BA	+ Flat pH Cartridge no ATC
BB	+ Rod ORP Cartridge no ATC
BC	+ Flat ORP Cartridge no ATC
BD	+ Little Dipper
BH	+ Flat pH Cartridge no ATC + Little Dipper
BI	+ Rod ORP Cartridge no ATC + Little Dipper
BJ	+ Flat ORP Cartridge no ATC + Little Dipper
BK	+ Little Dipper with Makeup graphite conductivity with threaded adapter
BQ	+ Pyxis
BR	+ WEL-PHF no ATC + Pyxis
BS	+ WEL-MVR no ATC + Pyxis
BT	+ WEL-MVF no ATC + Pyxis
BU	+ Pyxis with Makeup graphite conductivity with threaded adapter

## 316SS contacting conductivity + Flow Switch manifold on panel

FA	+ Flat pH Cartridge no ATC
FB	+ Rod ORP Cartridge no ATC
FC	+ Flat ORP Cartridge no ATC
FD	+ Little Dipper
FH	+ Flat pH Cartridge no ATC + Little Dipper
FI	+ Rod ORP Cartridge no ATC + Little Dipper
FJ	+ Flat ORP Cartridge no ATC + Little Dipper
FQ	+ Pyxis
FR	+ WEL-PHF no ATC + Pyxis
FS	+ WEL-MVR no ATC + Pyxis
FT	+ WEL-MVF no ATC + Pyxis

## High pressure contacting conductivity + Flow Switch manifold on panel

DE	+ pH & 190783
DF	+ ORP & 190783

## Electrodeless conductivity + Flow Switch manifold on panel

HA	+ Flat pH Cartridge no ATC
HB	+ Rod ORP Cartridge no ATC
HC	+ Flat ORP Cartridge no ATC
HD	+ Little Dipper
HH	+ Flat pH Cartridge no ATC + Little Dipper
HI	+ Rod ORP Cartridge no ATC + Little Dipper
HJ	+ Flat ORP Cartridge no ATC + Little Dipper
HK	+ Little Dipper with Makeup graphite conductivity with threaded adapter
HQ	+ Pyxis
HR	+ WEL-PHF no ATC + Pyxis
HS	+ WEL-MVR no ATC + Pyxis
HT	+ WEL-MVF no ATC + Pyxis
HU	+ Pyxis with Makeup graphite conductivity with threaded adapter