# Bourdon Tube Pressure Gauge Compressed Specialty Gas Gauge Type 131.15 - Stainless Steel Wetted Parts Type 161.15 - Monel Wetted Parts

WIKA Datasheet 1X1.15

## **Applications**

- Compressed specialty gas regulators
- Applications requiring stainless steel or Monel wetted parts
- Suitable for all media that will not obstruct the pressure system or attack 316SS or Monel parts

## **Special features**

- 316L or Monel wetted parts
- Twist-lock polycarbonate window
- Ranges to 10,000 psi



#### **Bourdon Tube Pressure Gauge Type 131.15**

## **Standard Features**

#### Design

**ASME B40.100** 

### Sizes

2" & 21/2" (53 & 68 mm)

## **Accuracy class**

± 3/2/3% of span (ASME B40.100 Grade B)

## Ranges

Vacuum / Compound to 200 psi Pressure from 15 psi to 10,000 psi or other equivalent units of pressure or vacuum

#### Working pressure

Steady: 3/4 of full scale value Fluctuating: 2/3 of full scale value Short time: full scale value

## Operating temperature

Ambient: -40°F to 140°F (-40°C to 60°C) Media: 140°F (+60°C) maximum

#### **Temperature error**

Additional error when temperature changes from reference temperature of 68°F (20°C)  $\pm 0.4\%$  for every 18°F (10°C) rising or falling. Percentage of span.

## Pressure connection

Material: 316L SS - Type 131.15 Monel - Type 161.15 1/8" or 1/4" NPT lower mount (LM)

#### **Bourdon Tube**

Material: 316L SS - Type 131.15 Monel - Type 161.15 15 psi to 600 psi: C-type 800 psi to 6,000 psi: helical

## Movement

Copper alloy

#### Dial

White aluminum with stop pin and black lettering "USE NO OIL" in red

### **Pointer**

Black aluminum

## Case

Chrome-plated steel

## Window


Twist-lock clear polycarbonate



## **Optional Extras**

- SS or Monel restrictor
- Painted steel case
- Polished brass case
- Nickel-plated socket
- Cleaned for oxygen service
- Stainless steel case (2" only)
- Helium leak test
- Special threaded connection
- Custom dial layout
- Other pressure scales available:

bar, kPa, MPa, kg/cm<sup>2</sup> and dual scales

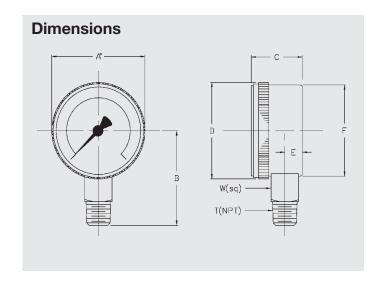

Size										
		Α	В	C <sup>1</sup>	D	E¹	F	Т	W	Weight
2"	mm	53	54	29	58	10.5	50.8	-	14	
	in	2.0	2.12	1.14	2.28	0.42	2.0	1/4"	0.55	0.24 lb
2.5"	mm	68	60	31	72.4	12	67.6	-	14	
	in	2.5	2.36	1.22	2.85	0.47	2.66	1/4"	0.55	0.33 lb

<sup>&</sup>lt;sup>1</sup> For 2½" painted steel case, C dimension changes to 1.14" (29 mm), and E dimension changes to 0.35" (9 mm)

Page 2 of 2

Ordering information

Pressure gauge model / Nominal size / Scale range / Size of connection / Optional extras required Specifications and dimensions given in this leaflet represent the state of engineering at the time of printing. Modifications may take place and materials specified may be replaced by others without prior notice.



**WIKA Instrument Corporation** 

1000 Wiegand Boulevard Lawrenceville, GA 30045 Tel (770) 513-8200 Toll-free 1-888-WIKA-USA Fax (770) 338-5118 E-Mail info@wika.com www.wika.com

WIKA Datasheet 1X1.15 · 03/2005