



MT

Clean Water Applications


- 1" NPT Brass Screw Plug
- Copper Sheath Element
- High Watt Density (64 - 86 W/In²)
- 0.75 - 3 kW
- Without Thermostat
- 120 and 240 Volt, Single Phase
- General Purpose or Moisture Resistant/Explosion Resistant Terminal Enclosure



E1 — Dimensions (Inches)

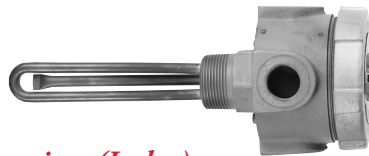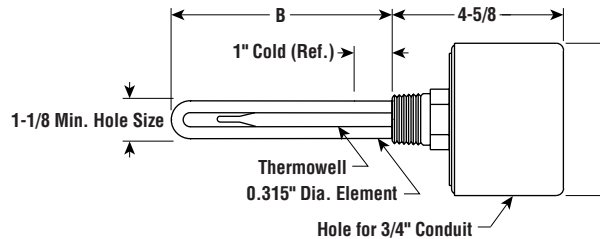

E2 — Dimensions (Inches)

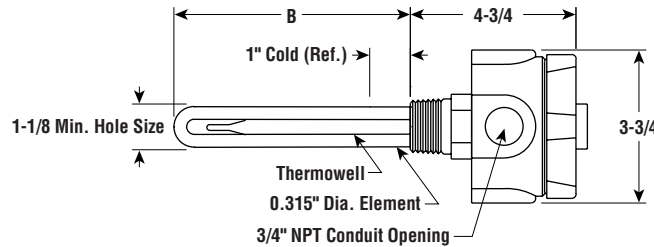

FASTShip

Same-day shipping on stock item orders received before 4 pm CST. 3-day shipping on assembly-stock items.

Specifications and Ordering Information

						E1 General Purpose ¹				E2 Moisture Resistant/Explosion Resistant ²			
kW	Volts	Phase	W/In ²	No. Elem.	DIM B (In.)	Model	Stock	PCN	Wt. (Lbs.)	Model	Stock	PCN	Wt. (Lbs.)
0.75	120	1	64	1	6-5/16	MT-750	AS	036281	2	MT-750E2	AS	036425	5
0.75	240	1	64	1	6-5/16	MT-750	AS	036290	2	MT-750E2	AS	036433	5
1	120	1	85	1	6-5/16	MT-1000	AS	036302	2	MT-1000E2	AS	036441	5
1	240	1	85	1	6-5/16	MT-1000	AS	036310	2	MT-1000E2	AS	036450	5
1.25	120	1	83	1	8-1/16	MT-1250	AS	036329	2	MT-1250E2	AS	036468	5
1.25	240	1	83	1	8-1/16	MT-1250	AS	036337	2	MT-1250E2	AS	036476	5
1.5	120	1	86	1	9-1/4	MT-1500	AS	036345	2	MT-1500E2	AS	036484	5
1.5	240	1	86	1	9-1/4	MT-1500	AS	036353	2	MT-1500E2	AS	036492	5
2	120	1	83	1	12-1/4	MT-2000	AS	036361	2	MT-2000E2	AS	036505	5
2	240	1	83	1	12-1/4	MT-2000	AS	036370	2	MT-2000E2	AS	036513	5
2.5	120	1	79	1	16-1/4	MT-2500	AS	036388	2	MT-2500E2	AS	036521	5
2.5	240	1	79	1	16-1/4	MT-2500	AS	036396	2	MT-2500E2	AS	036530	5
3	120	1	78	1	19-7/8	MT-3000	AS	036409	3	MT-3000E2	AS	036548	6
3	240	1	78	1	19-7/8	MT-3000	AS	036417	3	MT-3000E2	AS	036556	6

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, volts, phase, kW, PCN and quantity.

1. Heaters with General Purpose Enclosures are UL Listed and CSA Certified.
2. Heaters with Moisture Resistant/Explosion Resistant Enclosures are CSA NRTL/C Certified.