


Relay compatible with sockets:

S7-M, S7-L, S7-P, S7-PO, S7-I/O



# C7-T21

Low level  
Two change-over bifurcated contacts

**6 A 250 V Res 6 A 30 V DC1**  
**Min. contacts load: 1 mA / 5 V DC1**

### Contacts


Materials:	Standard, code 1	AgNi + 0.3μ Au
	Optional, code 2	AgNi + 10μ Au
Max. switching current		6 A
Max. peak inrush current (20 ms)		15 A
Max. switching voltage		250 V
Max. AC load (Table 1)		1.2 KVA
Max. DC load (Table 2)		

### Coils (Ohms ±10% @ 20°C)


Pull-in voltage	≤0.8 x U <sub>n</sub>
Drop-out voltage	≥0.1 x U <sub>n</sub>
Nominal coil power	1.2 VA (AC)/1 W (DC)

VAC	Ω	mA	VDC	Ω	mA
24	174	50	12	148	85
48	686	25	24	594	43
115	4K3	10.4	48	2K3	21
230	18K6	5.2	110	11K4	11


**Table 1** Electrical Life, ops. x 10<sup>6</sup>

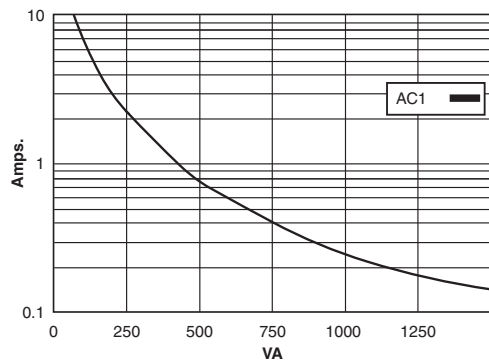

**Table 2** Max. DC Load

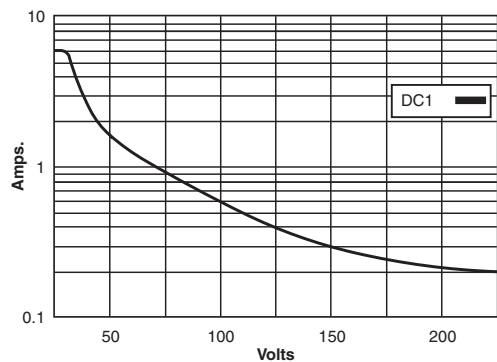

### Dimensions - mm

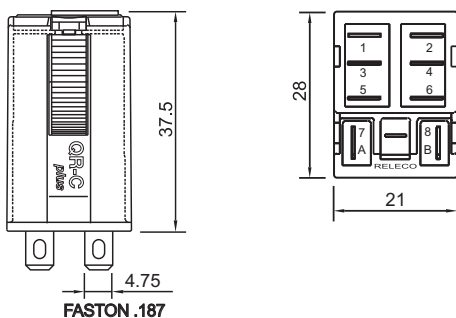

### Insulation

Dielectric strength (1 minute): Open contacts	1,000 V
Between adjacent poles	2.5 KV
Between contacts and coil	2.5 KV
Isolation resistance at 500 V	≥1 GΩ
Isolation, IEC 61810-5:	2.5 KV/3

### Specifications

Operate time + bounce time	16 ms
Release time + bounce time	8 ms
Ambient temperature	-40°C (no ice) to +70°C
Mechanical life ops.	10 Mill. AC, 20 Mill. DC relays
Electrical life at nominal load	≥100,000 ops.
Operating frequency at nominal load	1,200/hour
Protection degree	IP 40/RT1
Weight avg.	43 g

### Standard Types

AC 50 Hz, (60 Hz): 24, 48, 115, (120), 230, (240)  
X = LED (standard) C7-T21X .....VAC

DC 12, 24, 48, 110  
X = LED, no polarity (standard) C7-T21X ..... VDC  
Free-wheeling diode C7-T21DX..... VDC  
Polarity and free-wheeling diodes C7-T21FX..... VDC  
AC/DC bridge rectifier (24, 48 or 60 V) C7-T21BX..... VDC